

# SENSORLESS LOW SPEED PMSM MOTOR CONTROL WITH COGGING TORQUE COMPENSATION

Jarosław Guziński  
Wydział Elektrotechniki i Automatyki  
Politechnika Gdańska  
Gdańsk, Poland  
jaroslaw.guzinski@pg.edu.pl

Marcin Morawiec  
Wydział Elektrotechniki i Automatyki  
Politechnika Gdańska  
Gdańsk, Poland  
marcin.morawiec@pg.edu.pl

Zbigniew Krzemiński  
Wydział Elektrotechniki i Automatyki  
Politechnika Gdańska  
Gdańsk, Poland  
zbigniew.krzeminski@pg.edu.pl

Krzysztof Luksza  
Wydział Elektrotechniki i Automatyki  
Politechnika Gdańska  
Gdańsk, Poland  
krzluksz@gmail.com

Patryk Strankowski  
Wydział Elektrotechniki i Automatyki  
Politechnika Gdańska  
Gdańsk, Poland  
patryk.strankowski@pg.edu.pl

Abdellah Kouzou  
Faculty of Sciences and Technology,  
Ziane Achour University of Djelfa,  
Djelfa, Algiera  
kouzouabdellah@yahoo.fr

**Abstract**—The paper presents sensorless control of a low-speed permanent magnet synchronous machine with use of modified state observer. An overview of the PMSM motor used in the research setup was presented. The problem of drive torque ripple, resulting mainly from the occurrence of a significant cogging torque, was discussed. A solution compensating the torque ripple of the PMSM motor was proposed. A start-up procedure of the speed control system, allowing to run the drive system without speed and position sensors, was prepared. The field-oriented control with PI controllers of stator currents in the dq axes was implemented. The equations of a new, simplified version of the Krzemiński observer were presented. The observer has simpler structure of the gains, thus it is less computationally-intensive and easier to tune. The experimental results confirming the correct operation of the drive system were shown.

**Keywords**—Permanent Magnet Synchronous Machine, PMSM, state observer, field oriented control, cogging torque.

## I. INTRODUCTION

The Permanent Magnet Synchronous Motors (PMSM) are used in many industrial applications, especially those requiring high driving parameters, such as precise speed control and high operation dynamics [1], [2]. Most often these machines are used in direct drives, i.e. without mechanical gear usage, where a low-speed motor is connected directly to the load, and the rotational speed does not exceed several hundred rpm [10]. Low-speed drives allow increasing the efficiency of energy conversion by eliminating the mechanical transmission power losses. These drives are most often used in: numerically controlled machine tools, robotic drives, printing machines, bending machines, etc. as well traction vehicles [2].

Utilizing the drive capabilities of PMSM is possible thanks to the control maximizing torque to current ratio. A very widespread of such methods is Field Oriented-Control (FOC) [1]. This method requires knowledge of the rotor's angular position and rotational speed. It can be achieved with position sensors, as well as sensorless, e.g. using state observers [3], [4].

The Luenberger motor electromotive force (EMF) observer utilizes the relationship between the angular rotor position and the motor EMF. As the EMF is not measured

directly, it must be estimated using the input variables (measured phase currents and the reference motor voltage) and the mathematical model of the PMSM. This observer treats the motor EMF as the estimated parameters. The Luenberger observer has less tendency to oscillate in the low speed range and is less computationally intensive than the Kalman Filter method [8].

In a MFC (Model Following Control) structure, the main controller generates a control signal for the object and its adjustable model. The additional controller, fed by a difference signal between the object output and model output, generates an additional control signal, which is added into the object input. Hence, if a tracking error occurs, an additional control signal is generated, whose task is to decrease the tracking error rapidly, and the object must follow the model. The reference model attempts to track the motor operating point. For example, in case of a step change in the motor load, the motor begins to slow down, and the motor's reference model begins to slow down too, because of the load estimator, which influences the drive model. Thus, the impact of distortion is eliminated by internal controllers in the drive model. This structure performs well for a speed range of single rpm (excluding standstill). It uses a back EMF observer to estimate the rotor position, but does not estimate the speed. This is a big advantage because of possible irregularity of estimated back EMF in this speed range, which makes the speed calculation difficult or impossible [5].

The Kalman filter is an estimator which provides optimal filtering with continuous Gaussian noises in the state and measurement, and known covariances of these noises. If the rotor speed and position (as extended states) are included in the dynamic model of the PMSM, the extended Kalman filter (EKF) can be used to linearize the non-linear state model for each new state estimate as it becomes available. The EKF is often used in PMSM drives to estimate the speed and position [6] [7].

Another interesting concept for this application is the Krzemiński disturbance observer. The idea of this observer is to treat the speed as the estimated parameter, and the EMF as a disturbance, and that's why from this point of view it is called the disturbance observer. The observer was

successfully used in drive systems with a squirrel-cage or wound-rotor induction motors, as well as for synchronous machines with surface or internally mounted permanent magnets. The Krzeminski observer is able to achieve a high accuracy of variable estimation for a wide speed operating range [22].

For the practical aspects of the sensorless drive operation it should also be mentioned that in a low speed PMSM machine drive torque ripple is a serious problem. It is mostly caused by the interaction between the magnetic field of the permanent magnets and time-varying stator reluctance, [4] - [13]. The ripple may negatively affect the operation of field-oriented control and should be compensated in the control system, [13] - [16].

This paper presents a complete speed and position sensorless PMSM control system, with cogging torque compensation. The main contribution of this paper is the introduction of a simplified version of Krzeminski speed and position observer. The new version has fewer observer gains and is thus easier to tune. Initial experimental verification of the proposed PMSM drive was previously carried out in [9]. In this paper additional experiments were conducted, with a speed and position sensor (an incremental encoder) for reference.

## II. PERMANENT MAGNET SYNCHRONOUS MOTOR AND THE RESEARCH SETUP

The drive system, evaluated in this article, uses a 500STK1M type brushless permanent magnet synchronous motor made by Alxion [18]. It is a low-speed machine with a large pair number of poles also known as torque motor. The motor is shown in Fig. 1 and Table 1 presents the machine's most important data.

Fig. 2, presents the EMF of the 500STK1M motor at 60 rpm. The presence of 5 and 7 harmonics is visible in the EMF waveform, however, the EMF deformation is small, because the  $THD_{EMF}=3.3\%$ , which should not have a significant effect on the electromagnetic torque generated.

The test set-up consists of two coupled 500STK1M machines. One machine, working as a motor, is the test object, the other, working as a generator, is used as the load. An MMB Drives type MMB0051M back-to-back frequency converter was used to supply the torque motor. The converter consists of two voltage inverters connected by dc link. A control system with FPGA and DSP processor was used. The FPGA unit is an Altera Cyclone II (type EP2C8F256, 8256 LEs, 182 I/O), while the DSP is an ADSP21363 (333 Mhz, 666 MIPS). The controller was designed the earlier laboratory projects for use in research as well for commercial setups. Its open-source code is prepared in C language. To generate the output voltage of the converter, pulse width modulation using the Space Vector Modulation (SVM) was utilized. The modulation period and sampling period of the control system are equal and set to 150  $\mu$ s. The converter control is connected to a PC via USB. The dedicated C++ application, launched on the PC, enabled to load the control program into the DSP, save and read the DSP program variables and to visualize their waveforms.

The experimental results, presented in the article, were expressed in arbitrary units relative to the motor nominal data given in Tab. 1.

TABLE I  
DATA OF 500STK1M PMSM TORQUE MOTOR [18]

Parameter	Abbreviation	Value	Unit
Power	$P_n$	12.6	kW
Voltage	$V_n^{(max)}$	330	V
Current	$I_n$	37.3	A
Motor rotational speed	$n_n$	600	rpm
Driving torque	$T_n$	210	Nm
Number of poles	$p$	36	-
Number of stator slots	$N_s$	108	-
Moment of inertia	$J$	0.216	$kg \cdot m^2$
Stator resistance	$R_s$	0.206	$\Omega$
Stator inductance	$L_s$	1	mH
EMF constant	$K_E$	3.69	$V/rads^{-1}$

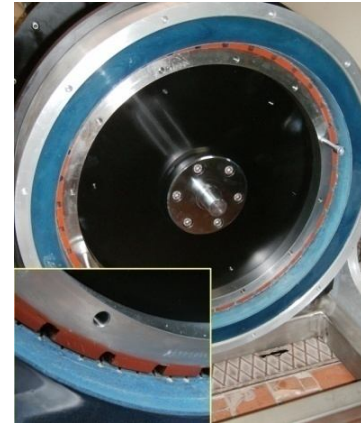


Fig. 1. An overview of the 500STK1M torque motor and a zoom-in on a couple of its magnetic poles

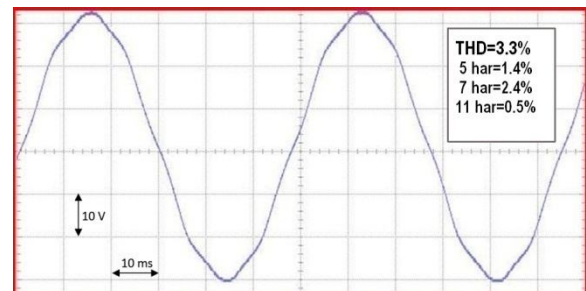


Fig. 2. The waveform of phase-to-phase electromotive force of 500STK1M torque motor at 60 rpm

## III. COGGING TORQUE

In the case of PMSM motors there are two dominating torque ripple components [13]:

- cogging torque  $T_{cog}$ , resulting from the interaction between permanent magnets placed on the rotor and time-varying stator reluctance,
- electromagnetic ripple torque  $T_{elmag}$  resulting from a non-sinusoidal magnetic flux waveform.

The cogging torque component  $T_{cog}$  reaches up to several percent of the rated torque of the motor and is a function of the rotor position [10]:

$$T_{cog} = -\frac{l}{2} \psi_m^2 \frac{d\mathfrak{R}}{d\theta_r} \quad (1)$$

where:  $\psi_m$  is the magnetic flux of the permanent magnets,  $\mathfrak{R}$  is the total reluctance of the magnetic circuit, and  $\theta_r$  is the angular position of the rotor.

To minimize the cogging torque of the 500STK1M motor, stator slots are made skewed which is common in similar drives [17]. Despite this, the amplitude of  $T_{cog}$  is large and has a significant impact on the torque motor operation.

The frequency of the cogging torque depends on the number of stator slots  $N_s$  and the number of poles of the rotor  $p$ . The period of the cogging torque ripple is defined by the following equation [11]:

$$\theta_{cog} = \frac{360^\circ}{LCM(N_s, p)} \quad (2)$$

According to the 500STK1 motor data from Table 1 the period of cogging torque ripple  $\theta_{cog}=3.3^\circ$  because the least common multiple (LCM) of the number of stator slots and number of poles is  $LCM(N_s, p) = 108$ .

Sample waveforms of the estimated electromagnetic torque of 500STK1 motor are shown in Fig. 3. It can be seen in Fig. 3 waveforms that the significant torque pulsations appear in the torque waveforms. The shape of the torque pulsation is characteristic for the cogging torque. The frequency  $f_{cog}$  of these waveforms results from the mechanical frequency  $f_{mech}$  of the motor, the number of stator slots  $N_s$  and the number of pole pairs  $2p$ :

$$f_{cog} = f_{mech} \frac{N_s}{2p} \quad (3)$$

A significant cogging torque leads to the formation of velocity ripples and may cause incorrect operation of the PMSM drive [13] - [15]. This problem can be solved by e.g. using advanced speed controllers or the implementation of cogging torque compensation. The method of cogging torque compensation presented in the following paper is based on the estimation of the instantaneous motor torque and the determination of a proper compensating q current component (these calculations are performed in the *Tcog comp.* block in Fig.5). In the field-oriented control (described in part 5 of this paper), the reference q component of the stator current  $i_{sq}^{ref}$  can be determined based on the output signal of the speed regulator  $i_{sq}^{Rref}$  and the compensating component  $i_{sq}^{Cref}$  [14]:

$$i_{sq}^{ref} = i_{sq}^{Rref} + i_{sq}^{Cref} \quad (4)$$

The correct determination of the torque ripple compensating component  $i_q^{Cref}$  can be achieved using e.g. a fast current regulator [13], artificial neural network [2] or a torque estimator [16].

In the control system proposed in this paper, the current compensation component  $i_{sq}^{Cref}$  is determined in the torque compensation block according to the following equation:

$$i_{sq}^{Cref} = k_{cog} (T_e - T_{econst}) \quad (5)$$

where:  $T_e$  is the electromagnetic torque,  $T_{econst}$  is the constant component of the motor torque  $T_e$ , and  $k_{cog}$  is the torque compensation coefficient, which in this particular control system was chosen experimentally.

The value of the electromagnetic torque  $T_e$  was determined by the state observer.

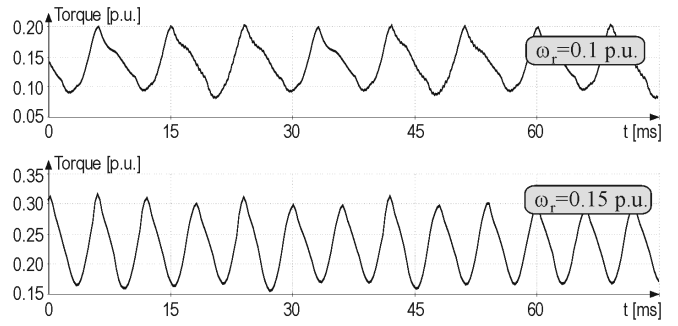


Fig. 3. The waveforms of the estimated torque of the 500STK1M motor at  $\omega_r=0.1$  p.u. ( $f_{cog}=108$  Hz) and  $\omega_r=0.15$  p.u. ( $f_{cog}=162$  Hz)

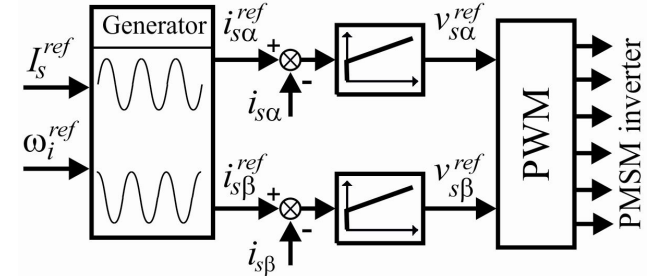


Fig. 4. The current control system of the PMSM torque motor used for the startup procedure

#### IV. STARTUP PROCEDURE OF THE DRIVE SYSTEM

Start up of the PMSM drive system operating without position and speed sensors requires an appropriate starting procedure [19], [20].

In the proposed solution, to allow the start-up of the PMSM motor, PI current controllers, operating in the fixed, orthogonal coordinate system  $\alpha\beta$  (Fig. 4) were used. At the start of the system, sinusoidal reference current components  $i_{s\alpha}^{ref}$ ,  $i_{s\beta}^{ref}$  are applied, with the amplitude  $I_{sref}$  and angular frequency  $\omega_i^{ref}$  gradually increasing, so as to force the motor to run at a low speed. Thanks to the current control, the inverter is protected against exceeding the allowed starting current.

After reaching the rotational speed of ca. 30 rpm, the state observer is switched on, which estimates all the parameters essential for the operation of the closed-loop control system. The next step is to switch the current controllers to work in the dq rotating coordinate system. In order to properly synchronize the position of the d-axis with the rotor position, the set-point value of the d-component of the stator current is set to  $i_{sd}^{ref}=0$ .

The next step of the start-up procedure is switching on the master speed regulator that sets the  $i_{sq}^{ref}$  current component, allowing to obtain the classic PMSM motor control structure discussed in section 5. The cogging torque is compensated in field-oriented control system by controlling of q-component current.

#### V. CONTROL STRUCTURE

The structure of the full control system is shown in Fig. 5. The drive system operates with field-oriented control. The magnetizing current is kept at  $i_{sd}^{ref}=0$ , which allows to achieve the minimal current and maximum torque [24]. The  $i_{sq}^{ref}$  current component is set by the speed controller with adding of the compensation of the cogging torque.







## IX. REFERENCES

1. M. Skiwski T. Tarczewski T. and L. M. Grzesiak, "PMSM drive based on STM32F4 Microcontroller", in *Poznan University of Technology Academic Journals*, no. 87, pp. 377-387, 2016.
2. D. Flieller, N. K. Nguyen, P. Wira, G. Sturtzer, D.O. Abdeslam and J. Merckle, "A Self-Learning Solution for Torque Ripple Reduction for Non-Sinusoidal Permanent Magnet Motor Drives Based on Artificial Neural Networks", in *IEEE Transactions on Industrial Electronics*, vol. 61, no. 2, DOI 10.1109/TIE.2013.2257136, pp. 655–666, February 2014.
3. M. Morawiec, Z. Krzeminski and A. Lewicki, „Sterowanie silnikiem o magnesach trwałych PMSM z obserwatorem prędkości kątowej wirnika”, in *Przegląd Elektrotechniczny*, no. 8, pp. 48-52, 2009. (in Polish)
4. Li Yongdong and Zhu Hao, "Sensorless Control of Permanent Magnet Synchronous Motor – A Survey", in *IEEE Vehicle Power and Propulsion Conference proceedings*, Harbin, China, September 3-5, 2008.
5. K. Urbanski, "A new sensorless speed control structure for PMSM using reference model", in *Bulletin of the Polish Academy of Sciences, Technical Sciences*, vol. 65, no. 4, DOI: 10.1515/bpasts-2017-0054, pp. 489-496, 2017.
6. F. Benhabane, A. Titaouine, O. Bennis, K. Yahia, D. Tajbi and A. Guettaf, "Sensorless direct torque control for salient-pole PMSM based on extended Kalman filter fed by AC/DC/AC converter", in *Frontiers of Energy*, vol. 6, no. 3, DOI: 10.1007/s11708-012-0190-1, pp. 247-254, 2012.
7. S. Singh and A. N. Tiwari, "Various techniques of speed control of PMSM. A review", in *Second International Conference on Electrical, Computer and Communication Technologies (ICECCT) proceedings*, Coimbatore, India, February 22-24, 2017, DOI: 10.1109/ICECCT.2017.8117995.
8. A. S. Mohamed, M. S. Zaky, A. Z. Zein El Din and H. A. Yasin, "Comparative Study of Sensorless Control Methods of PMSM Drives", in *Innovative Systems Design and Engineering*, vol. 2, no. 5, pp. 44-66, 2011.
9. J. Guziński, K. Łuksza, M. Morawiec, P. Strankowski and Z. Krzemiński, "Bezczujnikowe sterowanie wolnoobrotowym silnikiem PMSM z kompensacją momentu zaczepowego", in *Scientific Bulletin of Electrical and Control Engineering Department of Gdańsk University of Technology*, no 60, DOI: 10.32016/1.60.05, pp. 27-31, 2018. (in Polish)
10. J. Moravec, "Torque ripple of permanent magnet synchronous torque motor", in *Studentské tvůrčí činnosti, STČ* 2010.
11. Chun-Yu Hsiao, Sheng-Nian Yeh and Jonq-Chin Hwang, "A novel cogging torque simulation method for permanent-magnet synchronous machines" in *Energies*, vol. 4, no 12, DOI: 10.3390/en4122166, pp. 2165-2179, December 2011.
12. C. Studer, A. Keyhani, T. Sebastian and S.K. Murthy, "Study of Cogging Torque in Permanent Magnet Machines" in *IAS '97. Conference Record of the 1997 IEEE Industry Applications Conference Thirty-Second IAS Annual Meeting*, New Orleans, LA, USA, 5-9 October 1997, DOI: 10.1109/IAS.1997.643006, pp. 42-49.
13. J. Holtz and L. Springob, "Identification and compensation of torque ripple in high-precision permanent magnet motor drives", in *IEEE Transactions on Industrial Electronics*, vol. 43, no 2, DOI: 10.1109/41.491355, pp. 309–320, 1996.
14. S. Brock and J. Deskur, "A practical approach to compensation of torque ripple in high precision permanent magnet motor drives", in *3th International Conference on Electrical Drives and Power Electronics proceedings*, Dubrovnik, Croatia, 26-28 September 2005.
15. S. K. Panda, J. Xu and W. Qian, "Review of torque ripple minimization in PM synchronous motor drives" in *2008 IEEE Power and Energy Society General Meeting - Conversion and Delivery of Electrical Energy in the 21st Century*, Pittsburgh, USA, 20-24 July 2008, DOI: 10.1109/PES.2008.4596931.
16. B. Grear, P. Cafuta, G. Stumberger and A. M. Stanković, "Control-Based Reduction of Pulsating Torque for PMAC Machines" in *IEEE Transactions on Energy Conversion*, vol.17, nr 2, DOI: 10.1109/MPER.2002.4312050, pp. 169-175, June 2002.
17. N. Levin, S. Orlova, V. Pugachov, B. Ose-Zala and E. Jakobsons, "Methods to Reduce the Cogging Torque in Permanent Magnet Synchronous Machines", in *Elektronika ir Elektrotechnika*, vol. 19, no. 1, DOI 10.5755/j01.eee.19.1.3248, pp. 23-26, 2013.
18. Frameless brushless motors for direct drive. Alxion STK, <http://www.alxion.com/products/stk-motors/>.
19. C. Ning, W. Zhihong, Y. Shouyi, G. Weihua and G. Yuqian, "A New Starting Method of Sensorless PMSM Motors Based on STM32F103B", in *29th Chinese Control Conference proceedings*, Beijing, China, July 29-31, 2010.
20. T. Yamakawa, S. Wakao, K. Kondo, T. Yoneyama, S. Taniguchi, S. Mochizuki, "Starting Procedure of Rotation Sensorless PMSM at Coasting Condition for Railway Vehicle Traction", in *Wiley Periodicals, Inc. Electrical Engineering in Japan*, vol. 169, No. 2, pp. 56-63, 2009.
21. L. Wang, H. Zhang and X. Liu, "Sliding mode variable structure I/O feedback linearization design for the speed control of PMSM with load torque observer", in *International Journal of Innovative Computing, Information and Control*, vol. 9, no. 8, pp. 3485-3496, August 2013.
22. H. Abu-Rub, J. Guzinski and P. Strankowski, "Variable speed AC drives with inverter output filters", *Wiley*, 2015.
23. Z. Krzemiński, "Obserwatory prędkości dla bezczujnikowego sterowania maszynami prądu przemiennego" in *Przegląd Elektrotechniczny*, vol. 90, no 5, 2014. (in Polish)
24. B. K. Bose, "Power Electronics and Variable Frequency Drives", *IEEE Press*, 1997.

