

# Comparison of Ozonation and Evaporation as Treatment Methods of Recycled Water for Bioethanol Fermentation Process

André Fernandes<sup>1</sup> · Grzegorz Boczkaj<sup>1</sup>  · Joanna Głazowska<sup>1</sup> · Renata Tomczak-Wandzel<sup>1,2</sup> · Marian Kamiński<sup>1</sup>

Received: 23 September 2016 / Accepted: 28 February 2017 / Published online: 14 March 2017  
© The Author(s) 2017. This article is published with open access at Springerlink.com

**Abstract** The paper compared the performance of the ethanol yield after alcoholic fermentation with samples of rejected (RW) and permeate water (PW), RW and PW treated by oxidation with ozone (O<sub>3</sub>) (5 and 15 min) and evaporation, aiming the recirculation back to the bioethanol process. RW and PW were collected after an anaerobic bioreactor (AnBR) used for stillage treatment. Nine types of fermentations were made, where one used 100% tap water (control) and the remaining used 80% of recycled water and 20% of tap water. Comparing with the control (15.68%), evaporated permeate water and permeate water oxidized for 15 min achieved the highest and closest ethanol concentrations in v/v with 14.68 and 14.08% respectively. RW and PW had the lowest ethanol results with 8.43 and 8.68%. The studied methods for water treatment are effective to recycle water taking into consideration the ethanol yield, allowing a good possibility of recirculation. Chemical oxygen demand, ammonia nitrogen and phosphate content did not strongly affect the ethanol yield in all samples treated, with similar results. Oxidation was more environmental friendly and cheaper if performed in 5 min. Further research in the monitoring of the fermentation, ethanol quality and in the number of cycles of fermentation with recycled water is needed.

**Keywords** Fermentation · Recycling · Waste-water · Waste treatment and waste minimisation · Evaporation · Ozonation

## Abbreviations

\$	American dollars
AnBR	Anaerobic bioreactor
BOD	Biological oxygen demand
CF	Control fermentation
COD	Chemical oxygen demand
E°	Energy potential
EPW	Evaporated permeate water
ERW	Evaporated rejected water
HS-CGC-MS	Headspace capillary gas chromatography–mass spectrometry
kWh	Kilowatts per hour
N-NH <sub>3</sub>	Ammonia nitrogen content
O <sub>3</sub>	Ozone
PO <sub>4</sub> <sup>3-</sup>	Phosphate content
PW	Permeate water
PW <sub>ox</sub> 15	Permeate water oxidized for 15 min
PW <sub>ox</sub> 5	Permeate water oxidized for 5 min
RW	Rejected water
RW <sub>ox</sub> 15	Rejected water oxidized for 15 min
RW <sub>ox</sub> 5	Rejected water oxidized for 5 min

## Introduction

Ethanol is one of the most common and abundant compounds especially in the chemical and food industry. Ethanol is commonly used as a solvent and heating agent, reagent in synthesis and it is used also in, flavoring and medicine. The ethanol is mainly produced by fermentation, where agricultural products like sugarcane, corn, wheat and

✉ Grzegorz Boczkaj  
grzegorz.boczkaj@gmail.com

<sup>1</sup> Department of Chemical and Process Engineering, Chemical Faculty, Gdansk University of Technology, G. Narutowicza St. 11/12, 80-233 Gdansk, Poland

<sup>2</sup> Aquateam COWI AS, Karvesvingen 2, 0579 Oslo, Norway

others are used as raw material [1]. There are two methods to produce ethanol, wet-mill and dry-grind process [2–7]. *Saccharomyces cerevisiae* is the most popular and studied microorganism in alcoholic fermentation. It can produce ethanol concentrations in broth up to 18% (v/v), grow and survive within those values and can be compatible with other microorganisms present in the fermentation [8–10]. To obtain ethanol in a purity of 96 and 99% distillation and dehydration processes can be performed respectively [2, 11].

Stillage is produced in the bottom of the distillation column, presenting a dark brown color, acidic nature (pH 4–5) and a temperature between 70 and 80 °C. The presence of phenols and melanoidins are responsible for the dark brown color [1, 11, 12]. Chemical characteristics of the stillage differ, depending on the bioethanol feedstock, including chemical oxygen demand (COD) (15–176 gO<sub>2</sub>/L), biological oxygen demand (BOD) (7–96 gO<sub>2</sub>/L), total nitrogen content (0.2–4.2 g/L), total phosphate content (0.2–3.0 g/L), potassium (0.9–17.5 g/L) and sulfate content (2–6 g/L) [12, 13]. Treatments such as aerobic and anaerobic digestion, oxidation, adsorption, coagulation/flocculation, membrane separation, evaporation can be used to reduce the organic load of the stillage. One of the most popular process is the anaerobic digestion of the stillage. This process removes and reduces the content of COD and BOD, converts half of the COD in biogas and 10% in sludge [11, 12, 14, 15]. It can be successfully operated at high organic loading rates, low nutrient and energy requirements and stabilized sludge production [1, 5–7, 12]. Typical digestates from this type of treatment include among others total COD (around 55 g/L), sulfur based COD (around 10 g/L), nitrogen content (0.7–2.5 g/L) and phosphate content (1.5–10 g/l) [4–7].

Even though the anaerobic digestion can reduce significantly the organic load of the stillage, but it is not enough effective if the purpose is to use the digestate to recycle it back to the fermentation process. In the recent years several studies were done to obtain a possibility of full recycle the treated water from the stillage, applying a further stages of treatment. This would enable to save water, minimize the waste produced and reduce the impact on the environment. Several technologies were tested and are already implemented in the industry. These technologies can include one stage treatment, namely simple centrifugation of the stillage [4, 16]. Others attempt to implement combination of treatment technologies like biological–physical process, namely a two stage anaerobic digestion and a centrifugation stage between the two anaerobic digestion stages [7, 17–20]. Furthermore a two-step physical processes, like filtration and evaporation [21] as well as centrifugation and membrane filters [13] were studied. In this paper a biological–chemical and a biological–physical treatment processes

are proposed. The use of chemical purification by means of oxidation no additional waste is produced, thus minimizing the impact on the environment when comparing with physical processes.

O<sub>3</sub> is a powerful oxidizing agent, with a standard oxidation potential (E°) equivalent to 2.07 V, and is widely used in wastewater treatment and in treatment of tap water. It can decompose rapidly to free radicals that can instantly react with the organic compounds. The advantages of O<sub>3</sub> are high reaction rate, almost a lack of harmful by-products formation and generating oxygen (O<sub>2</sub>) as an end product [22, 23]. Once present in a basic solution, O<sub>3</sub> reacts with OH<sup>−</sup> producing hydroxyl radicals (E° 2.7 V) which are more reactive than O<sub>3</sub> [23–25]. Another advantage of using O<sub>3</sub> is the disinfection, i.e. ability to efficiently inactivate microorganisms. Disinfection with O<sub>3</sub> is widely used in drinking water treatment and its efficiency depends upon the oxidation time and the concentration of used ozone [22]. An evaporation process is proposed in this paper. The stillage is concentrated into syrup and the condensate, which has a low organic load and no inorganic salts and it can be used in closed cycle in the process [11, 12]. Evaporation can also inactivate microorganisms by heat and pressure shock. At the end, the collected distillate is free from the microorganisms and solid matter. The disadvantage of this process remains on the fact that no reaction occurs here, only separation, where the syrup has high concentration of organic load that still needs to be treated, which is considered an extra waste to the process.

The goal of this paper was to evaluate the possibility of recycling the treated wastewater to the fermentation process using evaporation or ozonation treatment, taking into account the ethanol yield. With this approach the goal is to reduce to the maximum the residues or wastes generated from stillage treatment and obtain a more environment friendly technologies. The treatment was applied to digester effluents, coming from different streams of an anaerobic digestion, namely rejected water (RW) and permeate water (PW). A comparison between ozonation for 5 and 15 min and evaporation of RW and PW samples and RW and PW samples without secondary treatment were performed. Chemical properties like COD, pH, ammonia nitrogen content (N-NH<sub>3</sub>) and phosphate content (PO<sub>4</sub><sup>3−</sup>) were compared in all studied processes. The effect of the chemical properties of all liquid samples on the ethanol yield was also studied.

## Materials and Methods

Fermentation experiments were carried out using different types of water, containing 80% of recycled water and 20% of tap water, to determine the ethanol concentration

in v/v and compared with control fermentation. Ethanol yield present in each fermentation was determined by HS-CGC–MS. The recycled water used passed by a secondary treatment, to increase the ethanol yield and purity of the digester effluents, i.e. PW and RW. Furthermore the efficiency of each treatment was controlled by COD, N-NH<sub>3</sub> and PO<sub>4</sub><sup>3-</sup> removal.

**Raw Materials**


Approximately 0.90 dm<sup>3</sup> of RW and 0.70 dm<sup>3</sup> of PW were kindly given by Veolia research laboratory (Netherlands). Figure 1 explains the method used in this work and the source of the samples used. The stillage comes from the bottom of the distillation column, where the fermentation broth is fed to produce ethanol which is collected at the top of the column. Afterwards it was first submitted to a centrifugation, where the liquid fraction was submitted to an anaerobic digestion in an Anaerobic Bioreactor (AnBR) coupled with an ultrafiltration equipment. PW was collected from the filtrate stream of the ultrafiltration. RW was collected from the liquid fraction of the centrifugation of the sludge from the AnBR. Both RW and PW can be considered digester effluents throughout this paper.

**Evaporation**

Evaporation was performed by a Heidoph Laborota 4000 efficient, vacuum rotary evaporator. A Heidolph 2 condenser was used as a condenser of the distillate. The operational conditions were, stirring at 60 rpm, vacuum pressure between 75 and 79 kPa and a temperature between 70 and 73 °C.


**Ozonation**

The gravimetric method was chosen as a first step to determine the ozonator efficiency. It was determined using a sodium sulfite solution during a certain period of oxidation time, using the apparatus in Fig. 2. The O<sub>3</sub> molecules oxidize sulfite (SO<sub>3</sub><sup>2-</sup>) to sulfate (SO<sub>4</sub><sup>2-</sup>) which was determined gravimetrically as barium sulfate (BaSO<sub>4</sub>) salt. The flowrate of the streams was calculated to determine the molar flowrate of ozone that came out of the ozonator. Afterwards the oxidation system was prepared so that the ozonator would receive air instead of pure oxygen. The scheme of the oxidation system is presented in Fig. 2. Each flask was stirred by a magnetic spinner. Two flat bottom flasks with a porous frit were used in the oxidation procedures. The two flasks were sealed at top to avoid O<sub>3</sub> loss. The flow reducing stream was used to reduce the flowrate to the flasks, which went to the venting system. Experimental procedures determined a flowrate around of 6.60 dm<sup>3</sup>/min in the stream leaving the ozonator, 6 dm<sup>3</sup>/min to the atmosphere and 0.60 dm<sup>3</sup>/min to the experimental flasks. O<sub>3</sub> concentration determined was 75 mg/dm<sup>3</sup>. The ozonator used

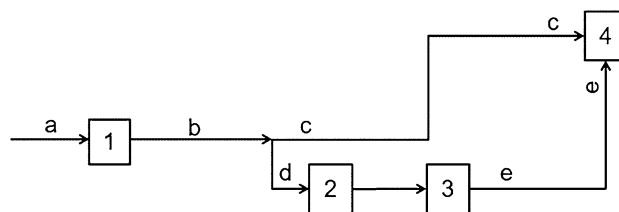

**Fig. 2** Scheme of the oxidation system used in the study. 1 ozonator; 2 oxidation flask; 3 oxidation flask; 4 vent; a Air; b stream from ozonator; c flow reducing stream; d flask stream; e stream from oxidation flasks

**Fig. 1** Experimental setup of the source of samples used, their treatment and the fermentation performed in this work. Colors of the scheme: Red processes used to obtain the samples used in this paper, green proposed purification process, black fermentation steps. Permeate water (PW); permeate water oxidized for 15 min (PW<sub>ox</sub>15); permeate water oxidized for 5 min (PW<sub>ox</sub>5); rejected water (RW); rejected water oxidized for 15 min (RW<sub>ox</sub>15); rejected water oxidized for 5 min (RW<sub>ox</sub>5). (Color figure online)

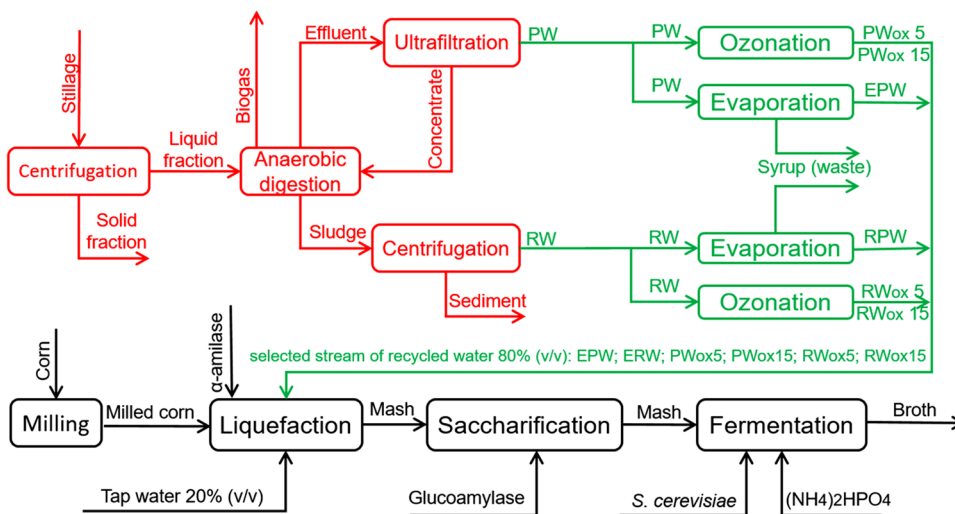

was an ozone generator type Tytan 32. The flowrate of the ozonator was set at  $5.0 \text{ dm}^3/\text{min}$ . The pressure of the streams was 196 kPa. Approximately  $0.10 \text{ dm}^3$  of RW and PW samples were oxidized in the conditions described above for 5 and 15 min with  $\text{O}_3$  doses of  $1.87 \times 10^{-3}$  and  $5.60 \times 10^{-3} \text{ kg}$  respectively. Oxidation was made at the primary pH of the samples and at room temperature.

### Starch Conversion and Fermentation

The dry-grind process was used to carry out the fermentations done in this work, using corn as feedstock. Figure 1 described the steps to perform the fermentation. *S. cerevisiae* was the microorganism used to perform the fermentations. The preparation of the yeast and starch conversion was carried out in the following steps. The corn was kindly provided by Veolia Company. A 1 kg of corn was grinded in a Retsch type ZM200 mill. A 0.02 kg of milled corn was weighted using an analytical balance and transferred to the fermentation flask. A  $0.10 \text{ dm}^3$  of water was added into the flask, where in the control fermentation (CF) only tap water was used. In the rest of the fermentations a mixture of 80% of recycled water and 20% of tap water were used. Afterwards the pH was adjusted to 5.5 with HCl (35–38%) using a Hana type HI8817 pH-meter,  $1.0 \times 10^{-4} \text{ dm}^3$  of  $\alpha$ -amilase (liquefying enzyme provided by Veolia) was added and the mixture was heated to  $85^\circ\text{C}$  and mixed for 60 min in the heater described above. To monitor the starch degradation to simpler sugars an iodine test was performed with Lugol's solution every 15 min. The test was stopped when there was no color change in the solution. Afterwards, the mash was cooled down to  $60^\circ\text{C}$ , the pH was adjusted to 4.8 with HCl (35–38%) and  $1 \times 10^{-4} \text{ dm}^3$  of glucoamylase (saccharification enzyme provided by Veolia) was added. After 5 and 15 min of adding the enzyme the iodine test was performed. When the mash reached  $35^\circ\text{C}$ ,  $5.0 \times 10^{-4} \text{ kg}$  of dry yeast *S. cerevisiae* and  $1.0 \times 10^{-4} \text{ kg}$  of Ammonium phosphate dibasic were added. The pH was adjusted to 4.8 with HCl 35–38% and the fermentation started in a  $0.25 \text{ dm}^3$  round flasks with a flat bottom inside a heater chamber research NCB-65G dryer, at  $35^\circ\text{C}$  for 2 days without stirring. Liquid samples for ethanol determination were collected at the end of fermentation and filtered by a Millipore hydrophilic filter with a  $0.45 \mu\text{m}$  pore diameter. A gas collection system was prepared to control the  $\text{CO}_2$  production rate during the fermentation. At the end of the airlock of the fermentation flask, a steal capillary was installed in order to collect the gases into two (connected in parallel)  $3 \text{ dm}^3$  tedlar bags immersed in water inside a recipient. A  $2.0 \text{ dm}^3$  beaker collected

the water which came out from the recipient (when gas entered in the bags).

### Analytical Methods

The determination of the COD was made by standard cuvette test. A Hach DRB 200 heater was used for mineralization. The analyses were made in duplicate samples. A Hach DR/2000 Spectrometer was used to read the COD values.  $\text{N-NH}_3$  was determined by the Nessler method, using the same spectrophotometer. The  $\text{PO}_4^{3-}$  was also measured by the method 8048 developed by HACH [26]. The ethanol concentration was analyzed by headspace capillary gas chromatography-mass spectrometry (HS-CGC-MS) [27–29]. The equipment used was a HP gas chromatograph, model 5890 series II and a HP single mass spectrometer quadrupole type, model 5972 A. A two point calibration curve for ethanol was used. The calibration points were 2 and 15% v/v. The samples were heated in the chamber at  $80^\circ\text{C}$  for 45 min. Afterwards  $2.0 \times 10^{-4} \text{ dm}^3$  of the gas phase was sampled by a gastight syringe and injected to the GC for analysis. The software used was the HP ChemStation. Every analysis was made in triplicate. The chromatographic parameters for the ethanol analysis are the following. Initial temperature  $35^\circ\text{C}$  (5 min isothermal); rate of increasing  $10^\circ\text{C}/\text{min}$ ; final temperature  $150^\circ\text{C}$ ; gas used  $\text{H}_2$ ; flow  $1.02 \times 10^{-3} \text{ dm}^3/\text{min}$ ; split ratio 20:1; column specifications DB-5ms (Agilent, USA)  $60 \text{ m} \times 0.25 \text{ mm} \times 1.40 \mu\text{m}$ ; injector temperature;  $200^\circ\text{C}$ ; detector temperature  $200^\circ\text{C}$ . Using the calibration curve (external standard), concentration of ethanol was determined in percent (v/v).

### Results and Discussion

The possibility of recycling water from a two stage stillage treatment was evaluated on the basis of the ethanol yield and compared with the CF. Furthermore an economical evaluation was performed on basis of the operational costs of each treatment studied.

#### Chemical Properties of RW and PW and Treated by $\text{O}_3$ and Evaporation

The samples were analysed for pH, COD,  $\text{N-NH}_3$  and  $\text{PO}_4^{3-}$  before and after treatment and their respective removal after treatment are represented in Table 1. The types of water studied and used in fermentations were the RW, PW, evaporated rejected water (ERW), evaporated permeate water (EPW), rejected water oxidized for 5 min ( $\text{RW}_{\text{ox}5}$ ), rejected water oxidized for 15 min ( $\text{RW}_{\text{ox}15}$ ), permeate water oxidized for 5 min ( $\text{PW}_{\text{ox}5}$ ) and permeate

**Table 1** Chemical properties of samples studied and their reduction after treatment

	COD (mgO <sub>2</sub> /L)	COD removal (%)	N/NH <sub>3</sub> (mg/L)	N/NH <sub>3</sub> removal (%)	PO <sub>4</sub> <sup>3-</sup> (mg/L)	PO <sub>4</sub> <sup>3-</sup> removal (%)	pH
RW	3635 ± 64	–	364	–	1200	–	7.5
PW	816 ± 21	–	210	–	3740	–	7.9
DRW	12 ± 0	99.67	194	46.70	0	100.00	8.6
DPW	18 ± 0	97.79	176	16.19	0	100.00	8.1
RW <sub>ox5</sub>	3605 ± 71	0.83	275	24.45	1890	–57.50	7.8
RW <sub>ox15</sub>	3260 ± 35	10.32	225	38.19	1535	–27.92	8.2
PW <sub>ox5</sub>	428 ± 4	47.55	193	8.10	1520	59.36	8.2
PW <sub>ox15</sub>	407 ± 10	50.12	153	27.14	1340		8.2

RW rejected water, PW permeate water, ERW evaporated rejected water, EPW evaporated permeate water, RW<sub>ox5</sub> rejected water oxidized 5 min, RW<sub>ox15</sub> rejected water oxidized 15 min, PW<sub>ox5</sub> permeate water oxidized 5 min, PW<sub>ox15</sub> permeate water oxidized 15 min

**Table 2** Determination of the energy costs of each treatment applied in rejected and permeate water (RW and PW)

Recycled water	Equipment power (W)	Heat of vaporization (KJ/kg)	Volume treated (L)	Time of treatment (min)	Energy/volume treated (kWh)	Energy per m <sup>3</sup> (kWh/m <sup>3</sup> )	Energy cost (\$/m <sup>3</sup> )
ERW	1300	2257	0.43	–	0.34	784	80
EPW	1300	2257	0.415	–	0.33	784	80
RW <sub>ox5</sub>	450	–	0.1	15	0.113	1125.9	114
RW <sub>ox15</sub>	450	–	0.1	5	0.038	375.3	38
PW <sub>ox5</sub>	450	–	0.1	5	0.038	375.3	38
PW <sub>ox15</sub>	450	–	0.1	15	0.113	1125.9	114

ERW evaporated rejected water, EPW evaporated permeate water, RW<sub>ox5</sub> rejected water oxidized 5 min, RW<sub>ox15</sub> rejected water oxidized 15 min, PW<sub>ox5</sub> permeate water oxidized 5 min, PW<sub>ox15</sub> permeate water oxidized 15 min

water oxidized for 15 min (PW<sub>ox15</sub>). A standard test method was used in all cases described in this work. In Table 2 the percentage of removal of the treated samples with ozonation and distillation is summarized. All samples of RW and PW treated revealed COD removal, where the ERW and EPW had higher COD removal. Regarding PO<sub>4</sub><sup>3-</sup>, it also decreased in all samples except the RW<sub>ox5</sub> and RW<sub>ox15</sub>, where it increased 57.5 and 27.92% respectively when comparing with the RW.

Regarding the EPW and ERW, they were almost completely purified, with total removal of PO<sub>4</sub><sup>3-</sup>, which remained in the syrup. A 97.79 and 99.67% COD removal and partial removal of N-NH<sub>3</sub> by 16.19 and 46.71% respectively was achieved. These results suggested a good separation of the organic load from the water.

Analysis of the results revealed that regarding the oxidized rejected water, there was partial removal of N-NH<sub>3</sub> by 24.45% in RW<sub>ox5</sub> and 38.19% in RW<sub>ox15</sub>. Phosphate removal was the opposite of the rest of the treatments with an increase of 57.50% in RW<sub>ox5</sub> and 27.92% in RW<sub>ox15</sub>. A possible explanation can be related to the analysis of the phosphate content, which is related with the dissolved orthophosphate. Since the rejected water

had some solid particles, organic phosphate digestion could occur during oxidation. The COD removal was 0.83% in RW<sub>ox5</sub> and 10.32% in RW<sub>ox15</sub>. A possible explanation for such behavior can be related with the nature of the RW, which is more persistent to oxidation. In addition the COD reduction in 5 min of oxidation was 30 mg/L and in 15 min was 375 mg/L. The COD removal does not explain the differences in the ethanol yield, but it is clear that longer oxidation results in higher removal of COD, N-NH<sub>3</sub> and PO<sub>4</sub><sup>3-</sup>.

Regarding the oxidized permeate water, its observable a high COD removal in first 5 min of oxidation, with 47.55% but after 15 min only an increase of 2.57% was observable comparing with 5 min of oxidation to 50.12%. PO<sub>4</sub><sup>3-</sup> removal was 59.36% in the PW<sub>ox5</sub> and 64.17% in the PW<sub>ox15</sub>. The N-NH<sub>3</sub> removal was 8.10% in the PW<sub>ox5</sub> and 27.14% PW<sub>ox15</sub>. It is clear that longer oxidation time increased the removal rates of COD, N-NH<sub>3</sub> and phosphate, but the removal was higher in the first minutes of oxidation.

Regarding the time of oxidation in overall higher oxidation time, it increased the removal of COD, N-NH<sub>3</sub> and PO<sub>4</sub><sup>3-</sup>, with only one exception that was the PO<sub>4</sub><sup>3-</sup> in the RW.



Comparing the evaporation with oxidation as treatment methods for PW and RW, evaporation revealed by far higher COD and phosphate removal values, with more than 97.5 and 100% respectively. Regarding N-NH<sub>3</sub> removal, EPW was lower than PW<sub>ox</sub>15 (16 and 27%) and higher in the ERW comparing with RW<sub>ox</sub>15 (47 and 38%). Evaporation results in higher removal values and quality of treated water, suggesting a good separation between water and the organic load. However the syrup produced results in additional waste generated, which is highly concentrated in organic compounds. In the oxidation no additional waste is generated, resulting in a more environmental friendly technology [23, 24].

Analysing the pH of all oxidation processes, it can be said that the pH was not optimal if the goal was to remove organic load from the water [23, 24]. Since the treated water had to be re-used in fermentation, alkaline pH would not be a reasonable choice, since the adjustment of the pH value would be a problem in a close cycle, which would increase the cost of the process. Furthermore the closer the pH of the recycled water to the pH of the tap water, the lesser amount of chemicals would be needed to adjust the pH value. Thus not changing the pH was the best choice.

### Ethanol Yield

A comparison of the concentration of ethanol in percent v/v for of all fermentations performed is presented in Fig. 3, which can be described as the ethanol yield of the fermentation due to the fact that the same final volume of water was obtained after fermentation. The CF (using only tap water) achieved 15.65% (v/v) of ethanol concentration very similar to values reported by Wang et al. [3] (15.5%). PW<sub>ox</sub>15 and ERW had the highest ethanol concentrations, 14.08 and 14.68% v/v. The RW<sub>ox</sub>15, ERW, PW<sub>ox</sub>5 and RW<sub>ox</sub>5 obtained reasonable ethanol concentrations v/v by 13.75, 12.74, 12.81 and 11.98% respectively, with values in the range of ethanol concentration in the fermentation broth [2, 3, 8]. It is clear that the recycled treated digester effluents had a twofold increase of the ethanol yield, when comparing with recycled untreated digester effluent (samples RW and PW).

Comparing the PW<sub>ox</sub>15 and RW<sub>ox</sub>15, similar values were found in ethanol concentration (14.08 and 13.75% respectively). Even though COD, PO<sub>4</sub><sup>3-</sup> and N-NH<sub>3</sub> values were higher in RW<sub>ox</sub> than in PW<sub>ox</sub> (8.4 times in COD; 1.5 times in N/NH<sub>3</sub>; 1.15 times in phosphate), it did not seemed to make a strong effect on the ethanol yield. Thus the ethanol yield is not dependent on the COD, N-NH<sub>3</sub> and PO<sub>4</sub><sup>3-</sup> content in the range of concentrations reported in this paper.

Comparing the RW and PW oxidized for 5 and 15 min, the ethanol yield increased for samples collected after 5–15 min of oxidation (PW 12.84–14.08% and RW 11.98


and 13.75%) revealing that longer exposure to O<sub>3</sub> could enhance the ethanol yield.

The comparison between evaporation and oxidation treatments regarding the ethanol yield as performed. Regarding PW, EPW and PW<sub>ox</sub>15 achieved similar ethanol yields (14.68 and 14.05% respectively). On the other hand in RW. Even though ERW had higher treatment efficiency, it obtained 1% lower ethanol yield than RW<sub>ox</sub>15 (12.74 and 13.75%). Nevertheless the results are not significant different between treatments for PW and RW. The RW and PW had the lowest ethanol concentration in (v/v) of all fermentations performed with 8.43 and 8.68% respectively, which was approximately half of ethanol yield for the CF and some treated samples. These results are comparable with values of Gao et al. [7] which obtained 9.5% (v/v) ethanol concentrations using 90.9% (v/v) of the treated water by anaerobic digestion. Likewise Bialas et al. [4] obtained 9.5% (v/v) ethanol concentration using 75% of the treated water from a distillation process. Sun et al. [18] used a combination of two-stage UASB treatment on the treatment of stillage and also obtain ethanol concentrations around 10% using 100% of treated water. This study proved that the treatment of the digester effluent can increase significantly the ethanol yield to values close to the control fermentation. The combination of biological and physical/chemical treatment of the recycled stillage revealed to be effective in terms of ethanol yield after fermentation.

It is clear that is necessary to study BOD, sugars, microorganisms, acids and by-products during the fermentation, to determine if there are any inhibitions leading to lower ethanol production and consequently ethanol yield. In addition there is a need to conduct several recycle fermentations with the recycled water to check if the accumulation of the chemical parameters discussed here can influence the ethanol yield.

Figure 4 presents the CO<sub>2</sub> production rate during the fermentation. The studies revealed that PW<sub>ox</sub>15 had lowest production of CO<sub>2</sub> (2.85 dm<sup>3</sup>), even lower than PW (3 dm<sup>3</sup>). In addition CF had similar values than DPW (3.27 comparing with 3.26 dm<sup>3</sup>). These results are not consistent with the ethanol yields described above. This proves that there is no relation between the ethanol yield and the CO<sub>2</sub> production. Four phases in the alcoholic fermentation in respect to the CO<sub>2</sub> production were observed. The lag phase can be seen between 0 and 2 h of fermentation, the exponential phase of CO<sub>2</sub> production was between 2 and 8 h of fermentation, and from 8 to approximately 20 h of fermentation the CO<sub>2</sub> production rate decreased significantly, where differences started to be noted. After 20 h of fermentation the CO<sub>2</sub> production rate decreased to values close to zero, where this period can be considered as the stationary phase.

**Fig. 3** Comparison of the ethanol concentrations v/v of every fermentations performed

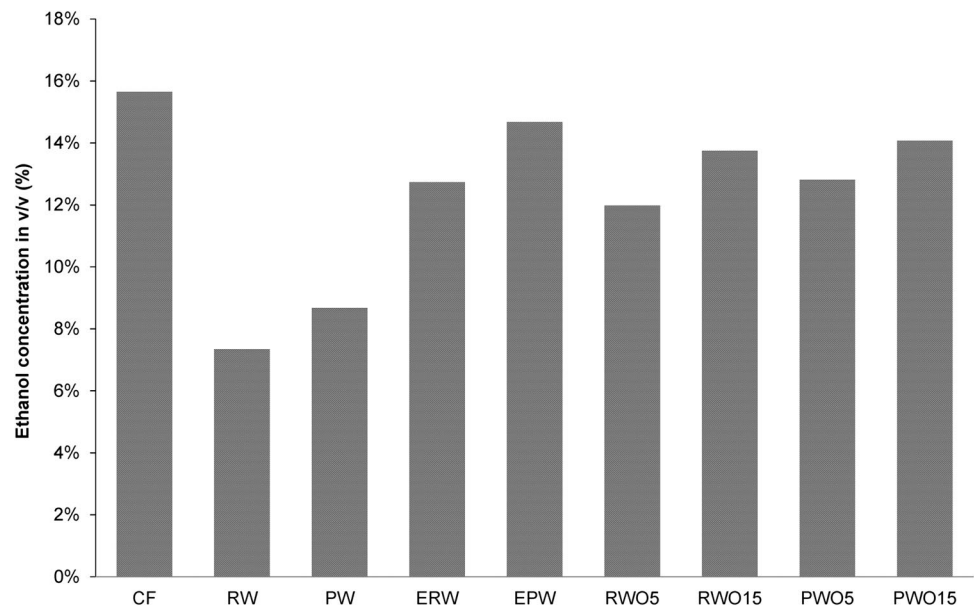


### Economical Evaluation

An economical evaluation was performed to determine which of the studied technologies is cheaper to implement in a real case scenario. The approach used was the determination of the operational costs. Since no chemicals are used in evaporation or ozonation, the operational costs are based only in the energy costs. The cost was determined for the treatment of 1 m<sup>3</sup> of RW and PW. The power used in kilowatts per hour (kWh) was first determined for the volume of RW and PW treated in this work. In the case of ozonation it was done by multiplying the equipment power by the time of treatment. In evaporation

it was determined by multiplying the mass of water treated by the heat of evaporation of water at atmospheric pressure and temperature. It was omitted the influence of salts, and particles on this value. It was considered an efficiency of 80% in the evaporation. Afterwards an energy consumption followed by the energy cost to treat 1 m<sup>3</sup> of RW and PW was determined. In this work, the power of the ozonator was 450 W. The time of treatment was 5 and 15 min in the ozonation. The volume of RW and PW used is presented in Table 2. The heat of vaporization of water is 2257 KJ/kg. The energy cost in Poland for industrial clients is 0.1015 American dollars (\$) per kWh (Fig. 4).

**Fig. 4** CO<sub>2</sub> production rate during the fermentations. Y axis gives the volume of CO<sub>2</sub> produced in liters and X axis the time of fermentation in hours. Solid blue triangles control fermentation (CF); Solid red squares permeate water oxidized 15 min (PW<sub>ox</sub>15); Solid orange circles evaporated permeate water (EPW); Solid purple diamonds permeate water (PW). (Color figure online)

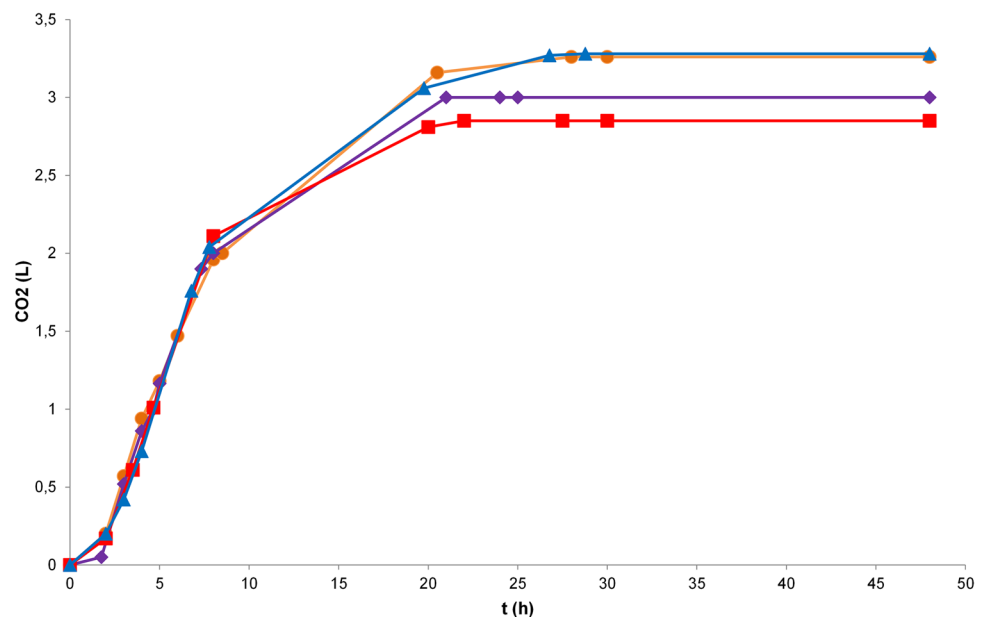

Looking to Table 2 it is proved that oxidation treatment is the cheapest with a value of 38 \$/m<sup>3</sup>, but if the treatment is extended to 15 min the scenario changes and oxidation is more expensive with 114 \$/m<sup>3</sup> comparing with 80 \$/m<sup>3</sup> in evaporation technology. Taking this into account evaporation and oxidation during 15 min, it can be said that evaporation is the most economical choice, in basis of energy costs.

## Conclusions

The aim of this study was to compare an evaporation and oxidation as a final stage of stillage treatment to recycle the treated water and use it in the ethanol process, namely the fermentation process. This comparison was made by analyzing the ethanol yield of all samples, with additional analysis of chemical parameters like COD, N-NH<sub>3</sub> and PO<sub>4</sub><sup>3-</sup> content to check their influence in the ethanol yield. Longer oxidation time revealed higher ethanol yields and removal values of COD, N-NH<sub>3</sub> and PO<sub>4</sub><sup>3-</sup> content, generating higher quality of treated WW. In overall evaporation achieved higher removal values in the parameters studied, generating higher quality of treated water. Nevertheless it produces additional waste with high content of phosphate, COD and N-NH<sub>3</sub> which still needs treatment.

Regarding the efficiency of the fermentations, in respect to the ethanol yield, the results achieved were acceptable and close to the levels of the control fermentation. The chemical treatment after anaerobic treatment reveals to be a cleaner technology comparing with evaporation. In addition oxidation in 5 min revealed to be cheaper than evaporation in terms of operational costs, but in 15 min is more expensive than evaporation. Moreover all treated PW and RW and CF were within the range of normal ethanol yields [2, 3, 8], with PW having slightly higher values than treated RW. The COD, N-NH<sub>3</sub> and PO<sub>4</sub><sup>3-</sup> content did not affect strongly the ethanol yields in all samples treated, proving that there is no connection between them. This conclusion is limited to the concentration level of this parameters and cannot be generalized. Thus the results are positive and enable a good possibility of recirculation of treated PW and RW in the alcoholic fermentation process and minimizing the waste produced in a bioethanol facility.

Nevertheless further research is needed to determine the main inhibitors which made the RW and PW untreated achieved only approximately half of the ethanol concentration in (v/v) in CF. Likewise fermentation parameters and by-products should also be monitored. In addition the monitoring of the quality of ethanol produced by the recycled water should be performed. The number of cycles of fermentation plays an important role regarding the implementation in industrial facility. This aspect needs further

research to understand if the number of cycles of fermentation affects the ethanol production and quality. The results of this paper were used for patent registration of the technology of closed cycle in ethanol fermentation [30].

**Acknowledgements** The authors would like to thank the Veolia, especially dr Bugusław Buczak (PhD. Eng.; Veolia Water), and Komers International for their cooperation on this project. The authors would like to thank also Mr. Wiesław Szyszyng (Eng.) for technical help during the studies. This paper has been in part realized in the scope of project entitled Studies of alkaline hydrolysis of lignocellulosic biomass and conversion conditions of hydrolyzed products to biogas supported by National Science Centre Poland, (UMO-2014/13/B/ST8/04258).

**Open Access** This article is distributed under the terms of the Creative Commons Attribution 4.0 International License (<http://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution, and reproduction in any medium, provided you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made.

## References

1. Siles, J.A., García-García, I., Martín, A., Martín, M.A.: Integrated ozonation and biomethanization treatments of vinasse derived from ethanol manufacturing. *J. Hazard. Mater.* **188**, 247–253 (2011)
2. Bothast, R.J., Schlicher, M.A.: Biotechnological processes for conversion of corn into ethanol. *Appl. Microbiol. Biotechnol.* **67**, 19–25 (2005)
3. Wang, P., Singh, V., Xue, H., Johnston, D.B., Rausch, K.D., Tumbleson, M.E.: Comparison of raw starch hydrolyzing enzyme with conventional liquefaction and saccharification enzymes in dry-grind corn processing. *Cereal Chem.* **84**, 10–14 (2007)
4. Białas, W., Szymanowska, D., Grajek, W.: Fuel ethanol production from granular corn starch using *Saccharomyces cerevisiae* in a long term repeated SSF process with full stillage recycling. *Bioresour. Technol.* **101**, 3126–3131 (2010)
5. Eskicioglu, C., Kennedy, K.J., Marin, J., Strehler, B.: Anaerobic digestion of whole stillage from dry-grind corn ethanol plant under mesophilic and thermophilic conditions. *Bioresour. Technol.* **102**, 1079–1086 (2011)
6. Alkan-Ozkaynak, A., Karthikeyan, K.G.: Anaerobic digestion of thin stillage for energy recovery and water reuse in corn-ethanol plants. *Bioresour. Technol.* **102**, 9891–9896 (2011)
7. Gao, T., Li, X.: Using thermophilic anaerobic digestate effluent to replace freshwater for bioethanol production. *Bioresour. Technol.* **102**, 2126–2129 (2011)
8. Lin, Y., Tanaka, S.: Ethanol fermentation from biomass resources: current state and prospects. *Appl. Microbiol. Biotechnol.* **69**, 627–642 (2006)
9. Mussatto, S.I., Dragone, G., Guimaraes, P.M.R., Silva, J.P.A., Carneiro, L.M., Roberto, I.C., Vicente, A., Domingues, L., Teixeira, J.A.: Technological trends, global market, and challenges of bio-ethanol production. *Biotechnol. Adv.* **28**, 817–830 (2010)
10. Eliasson, A., Christensson, C., Fredrik Wahlbom, C., Hahn-Hagerdal, B.: Anaerobic xylose fermentation by recombinant *Saccharomyces cerevisiae* carrying XYL1, XYL2, and XKS1 in



- mineral medium chemostat cultures. *Appl. Environ. Microbiol.* **66**, 3381–3386 (2000)
11. Wilkie, A.C., Riedesel, K.J., Owens, J.M.: Stillage characterization and anaerobic treatment of ethanol stillage from conventional and cellulosic feedstocks. *Biomass Bioenergy.* **19**, 63–102 (2000)
  12. Satyawali, Y., Balakrishnan, M.: Wastewater treatment in molasses-based alcohol distilleries for COD and color removal: a review. *J. Environ. Manag.* **86**, 481–497 (2008)
  13. Kim, J.-S., Kim, B.-G., Lee, C.-H., Kim, S.-W., Jee, H.-S., Koh, J.-H., Fane, A.G.: Development of clean technology in alcohol fermentation industry. *J. Clean. Prod.* **5**, 263–267 (1997)
  14. Tomczak-Wandzel, R., Górnicyzyk, J., Mędrzycka, K.: Anaerobic treatment of distillery. *5*, 11–20 (2008)
  15. Chen, Y., Cheng, J.J., Creamer, K.S.: Inhibition of anaerobic digestion process: a review. *Bioresour. Technol.* **99**, 4044–4064 (2008)
  16. Gumienna, M., Lasik, M., Szambelan, K., Czarnecki, Z.: Reduction of water consumption in bioethanol production from triticale by recycling the stillage liquid phase. *Acta Sci. Pol. Technol. Aliment.* **10**, 467–474 (2011).
  17. Zhang, Q.H., Lu, X., Tang, L., Mao, Z.G., Zhang, J.H., Zhang, H.J., Sun, F.B.: A novel full recycling process through two-stage anaerobic treatment of distillery wastewater for bioethanol production from cassava. *J. Hazard. Mater.* **179**, 635–641 (2010)
  18. Sun, F., Mao, Z., Zhang, J., Zhang, H., Tang, L., Zhang, C., Zhang, J., Zhai, F.: Water-recycled cassava bioethanol production integrated with two-stage UASB treatment. *Chin. J. Chem. Eng.* **18**, 837–842 (2010)
  19. Wang, K., Zhang, J.H., Liu, P., Cao, H.S., Mao, Z.G.: Reusing a mixture of anaerobic digestion effluent and thin stillage for cassava ethanol production. *J. Clean. Prod.* **75**, 57–63 (2014).
  20. Yang, X., Wang, K., Wang, H., Zhang, J., Mao, Z.: Ethanol fermentation characteristics of recycled water by *Saccharomyces cerevisiae* in an integrated ethanol-methane fermentation process. *Bioresour. Technol.* **220**, 609–614 (2016)
  21. Barta, Z., Reczey, K., Zacchi, G.: Techno-economic evaluation of stillage treatment with anaerobic digestion in a softwood-to-ethanol process. *Biotechnol. Biofuels.* **3**, 21 (2010)
  22. Summerfelt, S.T.: Ozonation and UV irradiation. *Aquac. Eng.* **28**, 36 (2003)
  23. Shahidi, D., Roy, R., Azzouz, A.: Advances in catalytic oxidation of organic pollutants—prospects for thorough mineralization by natural clay catalysts. *Appl. Catal. B Environ.* **174–175**, 277–292 (2015)
  24. Mota, A.L.N., Albuquerque, L.F., Beltrame, L.T.C., Chivone-Filho, O., Machulek, A. Jr., Nascimento, C.A.O.: Advanced oxidation processes and their application in the petroleum industry: a review. *Braz. J. Pet. Gas.* **2**, 122–142 (2009)
  25. Litter, M.: Introduction to photochemical advanced oxidation processes for water treatment. In: Boule, P., Bahnemann, D.W., and Robertson, P.K.J. (eds.) *Environmental photochemistry part II*, pp. 325–366. Springer, Berlin (2005)
  26. HACH Company: *Water analysis handbook*. HACH Company, Loveland (2005)
  27. Boczkaj, G., Kamiński, M., Przyjazny, A.: Process control and investigation of oxidation kinetics of postoxidative effluents using gas chromatography with pulsed flame photometric detection (GC-PFPD). *Ind. Eng. Chem. Res.* **49**, 12654–12662 (2010)
  28. Boczkaj, G., Przyjazny, A., Kamiński, M.: New procedures for control of industrial effluents treatment processes. *Ind. Eng. Chem. Res.* **56**, 1503–1514 (2014)
  29. Boczkaj, G., Kamiński, M.: Research on the separation properties of empty-column gas chromatography (EC-GC) and conditions for simulated distillation (SIMDIS). *Anal. Bioanal. Chem.* **405**, 8377–8382 (2013)
  30. Kamiński, M., Boczkaj, G., Głazowska, J., Hołowacz, I., Konopacka-Łyskawa D., Tomczak-Wandzel R.: Sposób wytwarzania bio- etanolu w procesie fermentacji alkoholowej, zwłaszcza z surowców odnawialnych (A process for producing bio-ethanol in the alcoholic fermentation, in particular from renewable raw materials) (2013). Polish Patent Registration, P.406014