

Postprint of: Kumar Jena S., Chakraverty S., Malikan M.: Application of Shifted Chebyshev Polynomial Based Rayleigh-Ritz method and Navier's Technique for Vibration Analysis of a Functionally Graded Porous Beam Embedded in Kerr Foundation. ENGINEERING WITH COMPUTERS. (2020).
<https://doi.org/10.1007/s00366-020-01018-7>

Application of Shifted Chebyshev Polynomial Based Rayleigh-Ritz method and Navier's Technique for Vibration Analysis of a Functionally Graded Porous Beam Embedded in Kerr Foundation

Subrat Kumar Jena¹, S. Chakraverty^{2*}, Mohammad Malikan³

^{1,2} Department of Mathematics, National Institute of Technology Rourkela, Odisha, 769008,
India

³Department of Mechanics of Materials and Structures, Faculty of Civil and Environmental Engineering, Gdansk University of Technology, 80-233, ul. G. Narutowicza 11/12, Gdansk,
Poland

*Corresponding author

E-mail:¹ sjena430@gmail.com, ²sne_chak@yahoo.com, ³ mohammad.malikan@pg.edu.pl

Abstract

Present study is dealt with the applicability of shifted Chebyshev polynomial based Rayleigh-Ritz method and Navier's technique on free vibration of Functionally Graded (FG) beam with uniformly distributed porosity along the thickness of the beam. The material properties such as Young's modulus, mass density, and Poisson's ratio are also considered to vary along the thickness of the FG beam as per the power-law exponent model. The porous FG beam is embedded in an elastic substrate; namely, the Kerr elastic foundation and the displacement field of the beam is governed by a Refined Higher Order Shear Deformation Theory (RHSDT). The effectiveness of the Rayleigh-Ritz method is due to the use of the shifted Chebyshev polynomials

as a shape function. The orthogonality of shifted Chebyshev polynomial makes the technique more computationally efficient and avoid ill-conditioning for the higher number of terms of the polynomial. Hinged-Hinged (HH), Clamped-Hinged (CH), Clamped-Clamped (CC), and Clamped-Free (CF) boundary conditions have been taken into account for the parametric study. Validation of the present model is examined by comparing it with existing literature in special cases showing remarkable agreement. A pointwise convergence study is also carried out for shifted Chebyshev polynomial based Rayleigh-Ritz method and the effect of power-law exponent, porosity volume fraction index, and elastic foundation on natural frequencies are studied comprehensively.

Keywords

Functionally graded porous beam; Vibration analysis; Kerr foundation; RHSDT; Rayleigh-Ritz method

1. Introduction

Over the years, functionally graded materials (FGMs) as new engineering materials have drawn the attention of many researchers. The primary purpose of making and expanding these materials is to increase the efficiency and different structural components and to control unwanted stresses and strains. Suitable properties of functional materials such as high strength, low weight and appropriate resistance to chemical conditions and high temperatures have led to the development of the use of these materials in various fields. In these materials, the properties of each point are defined by a proper mixing law as a function of the component properties and their volume fraction at each point. Graded materials are mainly used in a combination of metal and ceramics. In recent years, the use of FGMs in high-temperature environments such as nuclear reactors, chemical plants, and in the manufacture of high-speed vessels has become increasingly important. Also, a member with a metal-ceramic cross-section has a higher bearing capacity than a material made of only a single metal or ceramic member and also with a larger cross-sectional area. Most engineers today are looking for efficient methods to help them reduce the weight of the structure. As a result, by combining different materials on a functional scale, the bearing capacity can be substantially increased, and the weight of the structure reduced at the same time. This is very important in terms of economic savings. Given the precise determination of the buckling load and the natural frequency of vibration of linear elastic systems, especially for

beams, as a major member of the structure is of particular importance in the design. In this study, we will analyze the vibrational analysis of local beam made of functionally graded materials.

Analysis of the natural frequency of the beam made of FGMs has a very much publication in engineering and academic research. In the literature, Sina et al. [1] considered a first-order shear deformation beam approach in combination with an analytical method to study vibrations of an FGM beam. Ke et al. [2] analyzed FGM beams based on nonlinear vibration studies using an analytical examination. They utilized the classical beam hypothesis and solved the achieved constitutive equation for three different boundary condition cases, namely hinged-hinged, fixed-hinged, and fixed-fixed. Hein and Feklistova [3] assumed FGM beams with the non-uniform geometrical section in a vibrational situation and a variety of edge conditions. They employed the Euler-Bernoulli beam model and solved their obtained relations with Haar Wavelets numerical technique. Shooshtari and Rafiee [4] modeled nonlinear frequencies of an FGM beam with fixed edge conditions based on the outer excitations. The classical beam theory, in conjunction with the Galerkin solution method, gave numerical outcomes. Wattanasakulpong et al. [5] studied the thermal effects on an FGM beam beside resonant vibrations on the basis of a third-order shear deformation beam approach and solved the harvested vibrational relation based on the Ritz variational technique. In another work, Wattanasakulpong et al. [6], this time, employed experimental validation to compare with the numerical results of vibrations of an FGM beam with assuming the beam as a laminated composite as well. The used beam model in their theoretical part was a higher-order shear deformation one, and the obtained characteristic relation was solved with the Ritz method. They also applied various models of edge conditions and got good approval from their experiment with just 10 percent discrepancies between theoretical and experiments sections averaged for all boundary conditions. Thai and Vo [7] developed vibration analysis of FGM beams for different higher-order beam models. The constitutive equation of vibration was solved analytically, and the natural frequencies were computed using the Navier approach. Fallah and Aghdam [8] embedded an FGM beam with several edge conditions on a nonlinear elastic substrate and studied the vibrational response of the modeled system based on the temperature variations of the environment. The influences of the foundation were assumed as a linear transverse effect, shear, and nonlinear transverse impact. Pradhan and Chakraverty [9] investigated an FGM beam based on both classical and Timoshenko models and calculated the natural frequencies utilizing the Rayleigh-Ritz solution

technique. Rahimi et al. [10] evaluated the response of an FGM beam to the vibrational condition based on the first-order shear deformation beam theory. The achieved governing equations were solved by imposing fixed and hinged edge conditions in accurate modal analysis. Vo et al. [11] numerically analyzed a sandwich FGM beam in both stability and vibrational states with the help of a higher-order shear deformation beam model. The numerical results were captured by applying various boundary conditions based on the finite element method. Kanani et al. [12] studied the effects of a nonlinear elastic matrix on an FGM beam placed in a vibrational state with considering large amplitudes. The characteristic relation was derived based on the classical beam approach and solved by a variational iteration technique. There also many published works on the FGM beams in various conditions, considering new deformation beam models [13], using dynamic stiffness solution technique [14], a two-parameter elastic medium [15], and geometrical non-uniformity as well [16]. Chen et al. [17] in a diverse study, investigated an FGM beam with some porosity imperfections. The constitutive relation was derived in the framework of the Timoshenko beam model, and the Ritz trial function helped them to compute excited frequencies. They evaluated two kinds of porosity and confirmed that the type of porosity affects fundamentally the frequencies. Jing et al. [18] combined the Timoshenko beam theory with finite element formulation to extract natural frequencies of an FGM beam. They considered three kinds of shear corrections factors to modify and refine the shear stresses along the thickness. Sedighi et al. [19-21] promoted various analytical approaches such as Homotopy Perturbation Method with an Auxiliary Term, Max–Min Approach (MMA), Iteration Perturbation Method (IPM), etc. to study dynamical characteristics of structural elements. Esmaeili and Tadi Beni [22] analyzed dynamical characteristics of flexoelectric nanobeam composed of functionally graded materials.

Karami et al. [23] employed generalized DQM to investigate free vibration characteristics of two dimensional FG tapered nanobeam exposed to thermal environment based on Timoshenko beam theory while size dependent behavior was captured by nonlocal strain gradient model. Again, Karami et al. [24] studied guided wave propagation of clamped-clamped FG nanoplate with porosity by utilizing the first-order shear deformation theory and nonlocal elasticity theory. In the pioneering works, She et al. studied nonlinear bending behavior [25] of curved nanotubes made up of FG porous material while thermal snap-buckling [26] was carried out by using uniform temperature distributions across the thickness. Free vibration of FG porous nanoplate exposed to hygrothermal environment embedded in Kerr elastic foundation was studied by

Karami et al. [27]. In the work [28], resonance behavior of Kirchhoff nanoplate made up of 3D-FG materials was analyzed by using Navier's method and incorporating bi-Helmholtz nonlocal strain gradient theory. Karami et al. [29] employed second-order shear deformation theory in combination with nonlocal strain gradient model to study wave propagation analysis of FG porous nanoplate subjected to thermal and magnetic environment embedded in Winkle-Pasternak elastic foundation. Karami and Janghorban [30] utilized G-DQM to analyze free vibration of porous nanotube based on Timoshenko beam theory. The size dependent behavior was studied by nonlocal strain gradient model while the porosity of the nanotube was evenly distributed which was governed by modified power-law rule. Alimirzaei et al. [31] used finite element method to study static and dynamic analysis of viscoelastic micro-composite beam having geometrical imperfection. The microstructural effect was handled by the modified coupled stress theory. Karami et al. [32] used Galerkin's approach to investigate buckling behavior of functional graded nanoplate using nonlocal strain gradient theory. Tounsi et al. [33] investigated static behavior of advanced functionally graded (AFG) ceramic-metal plates exposed to a nonlinear hygro-thermo-mechanical load using a four-variable trigonometric integral shear deformation model placed in a two-parameter elastic foundation. Addou et al. [34] comprehensively studied the influence of different types of porosities on coupled vibration response of FG plates embedded in different types of elastic substrates using a quasi 3D HSDT. Chaabane et al. [35] analytically investigated the static and dynamic analysis of functionally graded beams resting on Winkler-Pasternak elastic foundation using hyperbolic shear deformation theory. Some other studies related to FG structures embedded in elastic foundations are discussed in [36-37]. Kaddari et al. [38] used a quasi-3D model to investigate bending and free vibration of functionally graded plates having porosity. Bourada et al. [39] utilized a trigonometric deformation theory to investigate vibrational behavior of FG beam considering perfect and porosity condition for simply supported edge support. Khiloun et al. [40] analytically investigated static and dynamic analysis of FG plates using high-order shear and normal deformation theory. Bousahla et al. [41] used a novel integral first order shear deformation theory to investigate the buckling and vibrational characteristics of the composite beam armed with single-walled carbon nanotubes resting on elastic foundation of Winkler-Pasternak type. Boussoula et al. [42] employed nth-order shear deformation theory to investigate the thermo-mechanical flexural behavior of sandwich plates composed of functionally graded material.

Paul and Das [43], in a new work, modeled pre-stresses into an FGM beam by taking the Timoshenko beam theory. They considered large deflections for various classic edge conditions. they, first, analyzed statically the problem and then studied the model dynamically with keeping the static stresses as pre-stressed in the beam. Wang and Li [44] discussed the vibration of an FGM beam based on the Levinson beam model. The simple-simple boundary conditions were gained by an approximate solution technique and the accurate results were obtained in terms of natural frequencies by the aforementioned beam model. The finite element method, in conjunction with the first-order theory of shear deformation, was employed to attain natural frequencies of an FGM beam by Kahya and Turan [45]. Nguyen et al. [46] investigated the excited vibrational state of an FGM Timoshenko beam based on the two-directional functionality. Deng et al. [47] presented a double-FGM Timoshenko beams system with assuming the Winkler-Pasternak elastic matrix. The frequencies of this system were showed on the basis of the dynamics stiffness solution method for a variety of edge conditions. Celebi et al. [48] derived a complementary function method to study the natural frequencies of a hinged-hinged beam. Sinir et al. [49] studied nonlinearly excited and natural frequencies of an FGM Euler-Bernoulli beam model with considering a non-uniform cross-section. Differential quadrature method was associated to discretize the frequency equation, and an eigenvalue solution made the results graphically. Banerjee and Ananthapuvirajah [50] in the framework of the dynamic stiffness method investigated the free vibration of an FGM classical beam. Karamanli [51] assumed bi-directional functionality for an FGM beam and presented natural frequencies of the beam for several boundary conditions based on a third-order of shear deformation theory. Fazzolari [52] examined three different higher-order shear deformation theories, namely trigonometric, polynomial, and exponential models, to investigate a laminated sandwich FGM beam. The porosity was taken into consideration as two types, and finally, the characteristic equation of vibration was solved on the basis of the Ritz solution approach. Cao and Gao [53] used an asymptotic development method to present natural frequencies of an FGM beam with taking non-uniformly geometry into account. The basic model of the beam, namely Euler-Bernoulli, was utilized, and a perturbation technique showed the numerical results.

As can be seen from the above literature, there is huge number of research to investigate the vibrational behavior of functionally graded porous beam, but only a few have employed higher order shear deformation theory to examine the vibration characteristic of these materials. The

porous FG beam is embedded in the Kerr elastic foundation and the displacement field of the beam is governed by a Refined Higher Order Shear Deformation Theory (RHSDT). Several classical boundary conditions such as HH, CH, CC, and CF boundary conditions have been taken into account by using the shifted Chebyshev polynomials Rayleigh-Ritz method. The advantage of the shifted Chebyshev polynomials is due to the orthogonal properties that makes the technique more computationally efficient by avoiding ill-conditioning for the higher number of terms of the polynomial. The results of this numerical method are also validated with the results of the Navier's method for HH edge support. Further, a parametric study is also conducted to analyze the effects of various parameters such as power-law exponent, porosity volume fraction index, and elastic foundation on natural frequencies.

2. Mathematical formulation of the proposed model

A Functionally graded beam consisting of ceramic and metal components, having a length (L), breadth (b), and thickness (h) are considered in this study. It is assumed that the material composition at the top surface ($z = h/2$) is ceramic-rich and consistently varies to the metal-rich surface at the bottom ($z = -h/2$). In this analysis, the FG beam is presumed to have even porosity distribution with porosity volume fraction ψ ($\psi \ll 1$), scattering equally throughout the metal and ceramic constituents, as illustrated in Fig. 1.

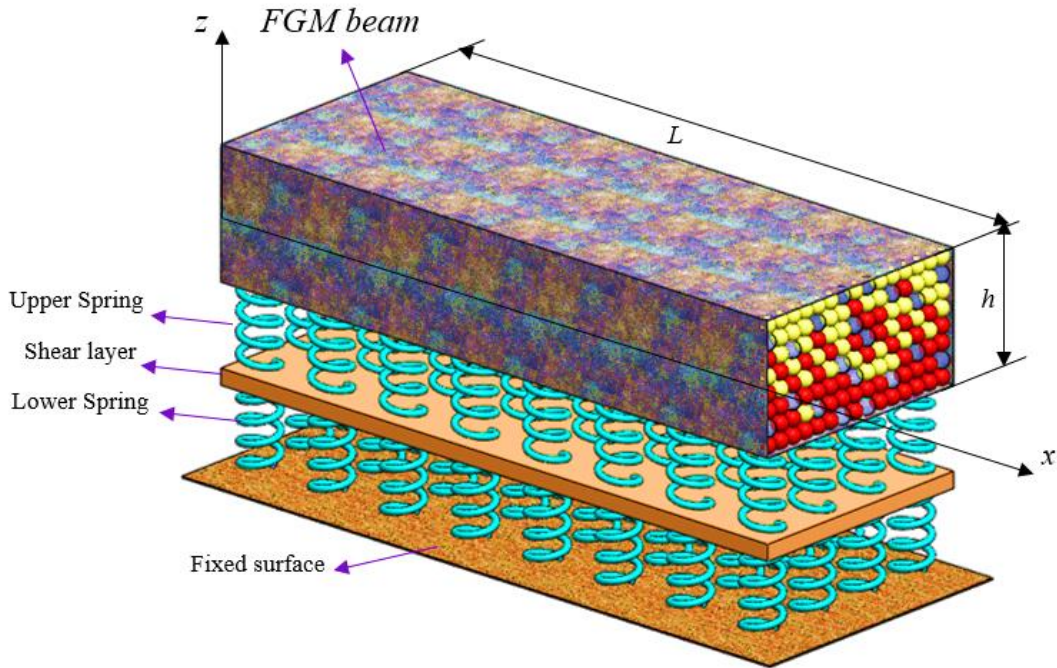


Fig 1.a Schematic representation of Rectangular FGM beam rested on the Kerr elastic foundation in 3D

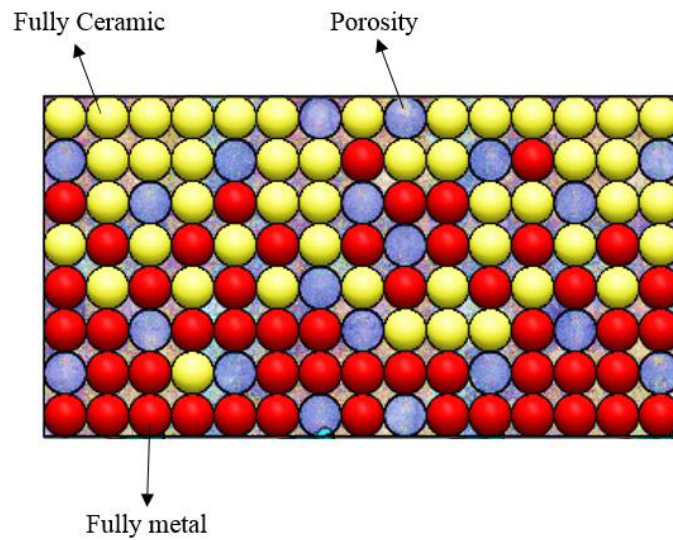


Fig 1.b Schematic representation of the rectangular cross-section of the FGM beam with evenly distributed porosity

So, the modified rule of the mixture is stated as [54-56]

$$P = P_c V_c + P_m V_m - \frac{\psi}{2} (P_c + P_m) \quad (1)$$

Here P_c , V_c and P_m , V_m are the material properties and volume fractions of the ceramic and metal components, respectively.

The volume fractions of the ceramic and metal constituents are given by [54-56]

$$V_c = \left(\frac{z}{h} + \frac{1}{2} \right)^k \quad (2)$$

$$V_m = 1 - \left(\frac{z}{h} + \frac{1}{2} \right)^k \quad (3)$$

In which k is the non-negative parameter that determines the distribution of material all across the thickness of the beam, namely power-law exponent and z is the distance from the mid-plane of the FG beam. Combining Eq. (1), Eq. (2), and Eq. (3) the material properties of the FG beam with porosity can be expressed as [54-56]

$$P = (P_c - P_m) \left(\frac{z}{h} + \frac{1}{2} \right)^k + P_m - \frac{\psi}{2} (P_c + P_m) \quad (4)$$

Therefore, Young's modulus $E(z)$, material density $\rho(z)$, and Poisson's ratio of the FG beam can be represented graphically as Figs. (2-4) and mathematically as [54-56]

$$E(z) = (E_c - E_m) \left(\frac{z}{h} + \frac{1}{2} \right)^k + E_m - \frac{\psi}{2} (E_c + E_m) \quad (5.a)$$

$$\rho(z) = (\rho_c - \rho_m) \left(\frac{z}{h} + \frac{1}{2} \right)^k + \rho_m - \frac{\psi}{2} (\rho_c + \rho_m) \quad (5.b)$$

$$\nu(z) = (\nu_c - \nu_m) \left(\frac{z}{h} + \frac{1}{2} \right)^k + \nu_m - \frac{\psi}{2} (\nu_c + \nu_m) \quad (5.c)$$

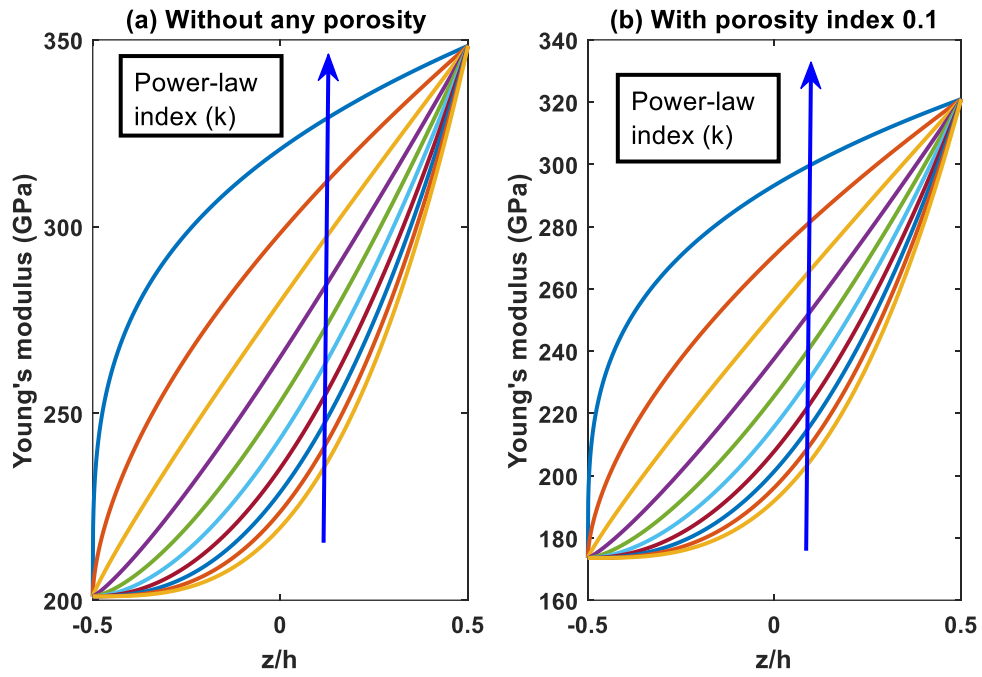


Fig. 2 Power-law variation of Young's modulus

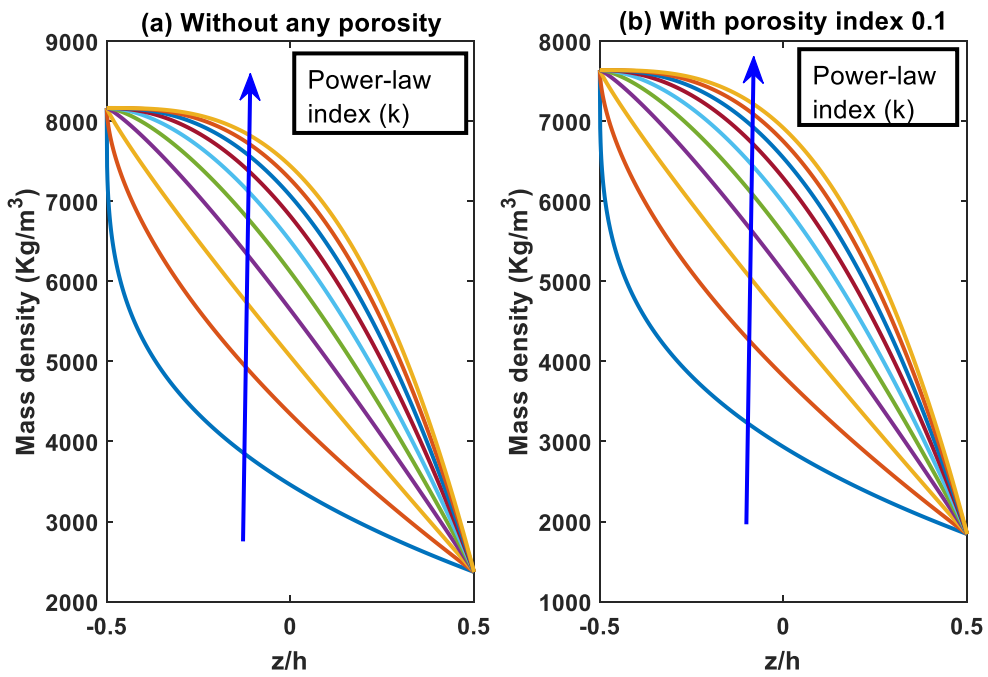


Fig. 3 Power-law variation of mass density

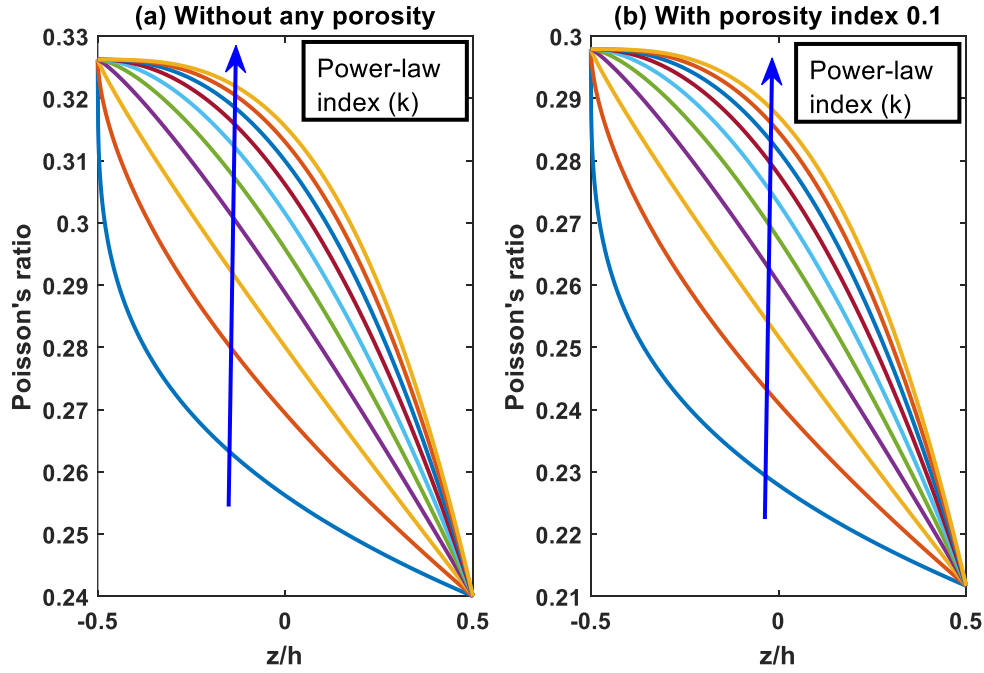


Fig. 4 Power-law variation of Poisson's ratio

According to the refined higher-order shear deformation theory, the displacement field can be represented as [7, 57-58]

$$u_1(x, z, t) = u(x, t) - z \left(\frac{\partial w_b}{\partial x} \right) - \left(z - \frac{h}{\pi} \sin \left(\frac{\pi}{h} z \right) \right) \left(\frac{\partial w_s}{\partial x} \right) \quad (6.a)$$

$$u_2(x, z, t) = 0 \quad (6.b)$$

$$u_3(x, z, t) = w_b(x, t) + w_s(x, t) \quad (6.c)$$

In which u , w_b , and w_s are the axial displacement, bending, and shear components of transverse displacement on the mid-plane of the FG beam, respectively.

The normal and shear strains of the FG beam for this beam theory are stated as

$$\varepsilon_{xx} = \frac{\partial u_1(x, z, t)}{\partial x} = \frac{\partial u}{\partial x} - z \left(\frac{\partial^2 w_b}{\partial x^2} + \frac{\partial^2 w_s}{\partial x^2} \right) + \left(\frac{h}{\pi} \right) \sin \left(\frac{\pi}{h} z \right) \frac{\partial^2 w_s}{\partial x^2} \quad (7)$$

$$\gamma_{xz} = \frac{\partial u_1(x, z, t)}{\partial z} + \frac{\partial u_3(x, z, t)}{\partial x} = \cos\left(\frac{\pi}{h} z\right) \frac{\partial w_s}{\partial x} \quad (8)$$

Considering that the material constituents of the FG beam comply with the generalized Hooke's law, the stress components yield [9]

$$\sigma_{xx} = Q_{11} \varepsilon_{xx} = \left(\frac{E(z)}{1 - \nu(z)^2} \right) \varepsilon_{xx} \quad (9)$$

$$\sigma_{xz} = Q_{55} \gamma_{xz} = \left(\frac{E(z)}{2(1 + \nu(z))} \right) \gamma_{xz} \quad (10)$$

2.1 Formulation of governing equations for Rayleigh-Ritz method

The strain energy (S_e) of the proposed model can be expressed as

$$\begin{aligned} S_e &= \frac{1}{2} \int_0^L \int_A (\sigma_{xx} \varepsilon_{xx} + \sigma_{xz} \gamma_{xz}) dA dx \\ &= \frac{1}{2} \int_0^L \int_A (Q_{11} \varepsilon_{xx}^2 + Q_{55} \gamma_{xz}^2) dA dx \\ &= \frac{1}{2} \int_0^L \left[A_{11} \left(\frac{\partial u}{\partial x} \right)^2 - 2B_{11} \left(\frac{\partial u}{\partial x} \right) \left(\frac{\partial^2 w_b}{\partial x^2} \right) + D_{11} \left(\frac{\partial^2 w_b}{\partial x^2} \right)^2 + A_s \left(\frac{\partial w_s}{\partial x} \right)^2 \right. \\ &\quad \left. + 2D_s \left(\frac{\partial^2 w_b}{\partial x^2} \right) \left(\frac{\partial^2 w_s}{\partial x^2} \right) + H_s \left(\frac{\partial^2 w_s}{\partial x^2} \right)^2 - 2B_s \left(\frac{\partial u}{\partial x} \right) \left(\frac{\partial^2 w_s}{\partial x^2} \right) \right] dx \end{aligned} \quad (11)$$

Here $(A_{11}, B_{11}, D_{11}, B_s, D_s, H_s) = \int_A Q_{11} (1, z, z^2, f_e, z f_e, f_e^2) dA$, where $f_e = z - \left(\frac{h}{\pi} \right) \sin\left(\frac{\pi}{h} z \right)$ and

$$A_s = \int_A Q_{55} \cos^2\left(\frac{\pi}{h} z\right) dA.$$

The Kinetic energy (K_e) can be stated as

$$\begin{aligned}
K_e &= \frac{1}{2} \int_0^L \int_A \rho(z) \left[\left(\frac{\partial u_1}{\partial t} \right)^2 + \left(\frac{\partial u_2}{\partial t} \right)^2 + \left(\frac{\partial u_3}{\partial t} \right)^2 \right] dA dx \\
&= \frac{1}{2} \int_0^L \int_A \rho(z) \left[\left(\frac{\partial u}{\partial t} - z \left(\frac{\partial^2 w_b}{\partial x \partial t} + \frac{\partial^2 w_s}{\partial x \partial t} \right) + \left(\frac{h}{\pi} \right) \sin \left(\frac{\pi}{h} z \right) \left(\frac{\partial^2 w_s}{\partial x \partial t} \right) \right)^2 + \left(\frac{\partial w_b}{\partial t} + \frac{\partial w_s}{\partial t} \right)^2 \right] dA dx \quad (12) \\
&= \frac{1}{2} \int_0^L \left[I_0 \left(\left(\frac{\partial u}{\partial t} \right)^2 + \left(\frac{\partial w_b}{\partial t} \right)^2 + \left(\frac{\partial w_s}{\partial t} \right)^2 + 2 \left(\frac{\partial w_b}{\partial t} \right) \left(\frac{\partial w_s}{\partial t} \right) \right) - 2I_1 \left(\frac{\partial u}{\partial t} \right) \left(\frac{\partial^2 w_b}{\partial x \partial t} \right) \right. \\
&\quad \left. + I_2 \left(\frac{\partial^2 w_b}{\partial x \partial t} \right)^2 - 2J_1 \left(\frac{\partial u}{\partial t} \right) \left(\frac{\partial^2 w_s}{\partial x \partial t} \right) + 2J_2 \left(\frac{\partial^2 w_b}{\partial x \partial t} \right) \left(\frac{\partial^2 w_s}{\partial x \partial t} \right) + K_2 \left(\frac{\partial^2 w_s}{\partial x \partial t} \right)^2 \right] dx
\end{aligned}$$

Where $(I_0, I_1, I_2, J_1, J_2, K_2) = \int_A \rho(z) (1, z, z^2, f_e, z f_e, f_e^2) dA$, where $f_e = z - \left(\frac{h}{\pi} \right) \sin \left(\frac{\pi}{h} z \right)$.

The external work done (W_e) by the Kerr foundation can be expressed as [55, 59]

$$W_e = -\frac{1}{2} \int_0^L \left[\left(\frac{k_u k_l}{k_u + k_l} \right) (w_b + w_s)^2 + \left(\frac{k_s k_u}{k_u + k_l} \right) \left(\frac{\partial}{\partial x} (w_b + w_s) \right)^2 \right] dx \quad (13)$$

Here k_s , k_u , and k_l are shear, upper, and lower layers elastic parameters of the Kerr foundation, respectively.

Assuming the motion of the FG beam as sinusoidal, the displacement components can be represented as [9]

$$u(x, t) = U(x) \cos(\omega t), w_b(x, t) = W_b(x) \cos(\omega t), \text{ and } w_s(x, t) = W_s(x) \cos(\omega t) \quad (14)$$

In which $U(x)$, $W_b(x)$, and $W_s(x)$ are the amplitudes of axial displacement, bending and shear components of transverse displacement, respectively, and ω denotes the natural frequency of the proposed model.

Utilizing Eq. (14) into Eq. (11), Eq. (12), and Eq. (13), the maximum strain energy (S_e^{Max}), kinetic energy (K_e^{Max}), and work done by Kerr foundation (W_e^{Max}) can be portrayed as

$$S_e^{Max} = \frac{1}{2} \int_0^L \left[A_{11} \left(\frac{dU}{dx} \right)^2 - 2B_{11} \left(\frac{dU}{dx} \right) \left(\frac{d^2W_b}{dx^2} \right) + D_{11} \left(\frac{d^2W_b}{dx^2} \right)^2 + A_s \left(\frac{d^2W_s}{dx^2} \right)^2 + 2D_s \left(\frac{d^2W_b}{dx^2} \right) \left(\frac{d^2W_s}{dx^2} \right) + H_s \left(\frac{d^2W_s}{dx^2} \right)^2 - 2B_s \left(\frac{dU}{dx} \right) \left(\frac{d^2W_s}{dx^2} \right) \right] dx \quad (15)$$

$$K_e^{Max} = \frac{\omega^2}{2} \int_0^L \left[I_0 (U^2 + W_b^2 + W_s^2 + 2W_b W_s) - 2I_1 \left(U \frac{dW_b}{dx} \right) + I_2 \left(\frac{dW_b}{dx} \right)^2 - 2J_1 \left(U \frac{dW_s}{dx} \right) + 2J_2 \left(\frac{dW_b}{dx} \right) \left(\frac{dW_s}{dx} \right) + K_2 \left(\frac{dW_s}{dx} \right)^2 \right] dx \quad (16)$$

$$W_e^{Max} = -\frac{1}{2} \int_0^L \left[\left(\frac{k_u k_l}{k_u + k_l} \right) (W_b + W_s)^2 + \left(\frac{k_s k_u}{k_u + k_l} \right) \left(\frac{d}{dx} (W_b + W_s) \right)^2 \right] dx \quad (17)$$

- By removing the upper spring, the Kerr foundation will be changed into Winkler-Pasternak foundation and the maximum work done by the Winkler-Pasternak foundation can be stated as

$$W_e^{Max} = -\frac{1}{2} \int_0^L \left[(k_l) (W_b + W_s)^2 + (k_s) \left(\frac{d}{dx} (W_b + W_s) \right)^2 \right] dx \quad (18)$$

- Likewise, if the upper spring and shear layer will be removed from the Kerr foundation, the model will be converted into Winkler elastic foundation and the maximum work done by the Winkler foundation can be modified as

$$W_e^{Max} = -\frac{1}{2} \int_0^L \left[(k_l) (W_b + W_s)^2 \right] dx \quad (19)$$

2.2 Formulation of governing equations for Navier's method

The variation in strain energy (δS_e) can be represented as

$$\begin{aligned}
\delta S_e &= \frac{1}{2} \int_0^L \int_A (\sigma_{xx} \delta \varepsilon_{xx} + \sigma_{xz} \delta \gamma_{xz}) dA dx \\
&= \frac{1}{2} \int_0^L \int_A \left[\sigma_{xx} \left(\frac{\partial \delta u}{\partial x} - z \frac{\partial^2 \delta w_b}{\partial x^2} - f_e \frac{\partial^2 \delta w_s}{\partial x^2} \right) + \sigma_{xz} \left(g \frac{\partial \delta w_s}{\partial x} \right) \right] dA dx \\
&= \frac{1}{2} \int_0^L \left[\left(N \frac{\partial \delta u}{\partial x} - M_b \frac{\partial^2 \delta w_b}{\partial x^2} - M_s \frac{\partial^2 \delta w_s}{\partial x^2} + Q \frac{\partial \delta w_s}{\partial x} \right) \right] dx \\
&= \frac{1}{2} \int_0^L \left[\left(-\frac{\partial N}{\partial x} \delta u - \frac{\partial^2 M_b}{\partial x^2} \delta w_b - \frac{\partial^2 M_s}{\partial x^2} \delta w_s - \frac{\partial Q}{\partial x} \delta w_s \right) \right] dx
\end{aligned} \tag{20}$$

Here $(N, M_b, M_s) = \int_A (1, z, f_e) \sigma_{xx} dA$, $Q = \int_A g \sigma_{xz} dA$, $f_e = z - \left(\frac{h}{\pi}\right) \sin\left(\frac{\pi}{h} z\right)$, and $g = \cos\left(\frac{\pi}{h} z\right)$

Likewise, the variation in kinetic energy (δK_e) can be expressed as

$$\begin{aligned}
\delta K_e &= \int_0^L \int_A \rho(z) \left[\left(\frac{\partial u_1}{\partial t} \right) \left(\frac{\partial \delta u_1}{\partial t} \right) + \left(\frac{\partial u_2}{\partial t} \right) \left(\frac{\partial \delta u_2}{\partial t} \right) + \left(\frac{\partial u_3}{\partial t} \right) \left(\frac{\partial \delta u_3}{\partial t} \right) \right] dA dx \\
&= \int_0^L \int_A \rho(z) \left[-\left(\frac{\partial^2 u_1}{\partial t^2} \right) \delta u_1 - \left(\frac{\partial^2 u_2}{\partial t^2} \right) \delta u_2 - \left(\frac{\partial^2 u_3}{\partial t^2} \right) \delta u_3 \right] dA dx \\
&= \int_0^L \left[\left(-I_0 \frac{\partial^2 u}{\partial t^2} + I_1 \frac{\partial^3 w_b}{\partial x \partial t^2} + J_1 \frac{\partial^3 w_s}{\partial x \partial t^2} \right) \delta u + \left(-I_0 \frac{\partial^2 w_b}{\partial t^2} - I_0 \frac{\partial^2 w_s}{\partial t^2} - I_1 \frac{\partial^3 u}{\partial x \partial t^2} \right. \right. \\
&\quad \left. \left. + I_2 \frac{\partial^4 w_b}{\partial x^2 \partial t^2} + J_2 \frac{\partial^4 w_s}{\partial x^2 \partial t^2} \right) \delta w_b \right. \\
&\quad \left. + \left(-I_0 \frac{\partial^2 w_b}{\partial t^2} - I_0 \frac{\partial^2 w_s}{\partial t^2} - J_1 \frac{\partial^3 u}{\partial x \partial t^2} + J_2 \frac{\partial^4 w_b}{\partial x^2 \partial t^2} + K_2 \frac{\partial^4 w_s}{\partial x^2 \partial t^2} \right) \delta w_s \right] dx
\end{aligned} \tag{21}$$

Where $(I_0, I_1, I_2, J_1, J_2, K_2) = \int_A \rho(z) (1, z, z^2, f_e, z f_e, f_e^2) dA$, where $f_e = z - \left(\frac{h}{\pi}\right) \sin\left(\frac{\pi}{h} z\right)$.

The variation in external work done (δW_e) can be portrayed as [55, 59]

$$\delta W_e = -\int_0^L \left[\left(\left(\frac{k_u k_l}{k_u + k_l} \right) (w_b + w_s) - \left(\frac{k_s k_u}{k_u + k_l} \right) \frac{\partial^2 (w_b + w_s)}{\partial x^2} \right) (\delta w_b + \delta w_s) \right] dx \tag{22}$$

Substituting Eqs. (20-22) into the extended Hamilton's principle $\int_0^T (\delta \mathcal{K}_e - \delta \mathcal{S}_e + \delta W_e) dt = 0$ and

collecting the coefficients of δu , δw_b , and δw_s , we have

$$\frac{\partial N}{\partial x} = I_0 \frac{\partial^2 u}{\partial t^2} - I_1 \frac{\partial^3 w_b}{\partial x \partial t^2} - J_1 \frac{\partial^3 w_s}{\partial x \partial t^2} \quad (23)$$

$$\begin{aligned} \frac{\partial^2 M_b}{\partial x^2} = & I_0 \left(\frac{\partial^2 w_b}{\partial t^2} + \frac{\partial^2 w_s}{\partial t^2} \right) + I_1 \frac{\partial^3 u}{\partial x \partial t^2} - I_2 \frac{\partial^4 w_b}{\partial x^2 \partial t^2} - J_2 \frac{\partial^4 w_s}{\partial x^2 \partial t^2} \\ & + \left(\frac{k_u k_l}{k_u + k_l} \right) (w_b + w_s) - \left(\frac{k_s k_u}{k_u + k_l} \right) \frac{\partial^2 (w_b + w_s)}{\partial x^2} \end{aligned} \quad (24)$$

$$\begin{aligned} \frac{\partial^2 M_s}{\partial x^2} + \frac{\partial Q}{\partial x} = & I_0 \left(\frac{\partial^2 w_b}{\partial t^2} + \frac{\partial^2 w_s}{\partial t^2} \right) + J_1 \frac{\partial^3 u}{\partial x \partial t^2} - J_2 \frac{\partial^4 w_b}{\partial x^2 \partial t^2} - K_2 \frac{\partial^4 w_s}{\partial x^2 \partial t^2} \\ & + \left(\frac{k_u k_l}{k_u + k_l} \right) (w_b + w_s) - \left(\frac{k_s k_u}{k_u + k_l} \right) \frac{\partial^2 (w_b + w_s)}{\partial x^2} \end{aligned} \quad (25)$$

Using generalized Hooke's law, the local stress resultants can be written as

$$N = A_{11} \left(\frac{\partial u}{\partial x} \right) - B_{11} \left(\frac{\partial^2 w_b}{\partial x^2} \right) - B_s \left(\frac{\partial^2 w_s}{\partial x^2} \right) \quad (26)$$

$$M_b = B_{11} \left(\frac{\partial u}{\partial x} \right) - D_{11} \left(\frac{\partial^2 w_b}{\partial x^2} \right) - D_s \left(\frac{\partial^2 w_s}{\partial x^2} \right) \quad (27)$$

$$M_s = B_s \left(\frac{\partial u}{\partial x} \right) - D_s \left(\frac{\partial^2 w_b}{\partial x^2} \right) - H_s \left(\frac{\partial^2 w_s}{\partial x^2} \right) \quad (28)$$

$$Q = A_s \left(\frac{\partial w_s}{\partial x} \right)$$

(29)

Combining Eqs. (23-25) and Eqs. (26-29), the governing equations of motion in terms of displacements can be obtained as

$$A_{11} \left(\frac{\partial^2 u}{\partial x^2} \right) - B_{11} \left(\frac{\partial^3 w_b}{\partial x^3} \right) - B_s \left(\frac{\partial^3 w_s}{\partial x^3} \right) = I_0 \frac{\partial^2 u}{\partial t^2} - I_1 \frac{\partial^3 w_b}{\partial x \partial t^2} - J_1 \frac{\partial^3 w_s}{\partial x \partial t^2} \quad (30.a)$$

$$B_{11} \left(\frac{\partial^3 u}{\partial x^3} \right) - D_{11} \left(\frac{\partial^4 w_b}{\partial x^4} \right) - D_s \left(\frac{\partial^4 w_s}{\partial x^4} \right) = I_0 \left(\frac{\partial^2 w_b}{\partial t^2} + \frac{\partial^2 w_s}{\partial t^2} \right) + I_1 \frac{\partial^3 u}{\partial x \partial t^2} - I_2 \frac{\partial^4 w_b}{\partial x^2 \partial t^2} - J_2 \frac{\partial^4 w_s}{\partial x^2 \partial t^2} + \left(\frac{k_u k_l}{k_u + k_l} \right) (w_b + w_s) - \left(\frac{k_s k_u}{k_u + k_l} \right) \frac{\partial^2 (w_b + w_s)}{\partial x^2}$$

(30.b)

$$B_s \left(\frac{\partial^3 u}{\partial x^3} \right) - D_s \left(\frac{\partial^4 w_b}{\partial x^4} \right) - H_s \left(\frac{\partial^4 w_s}{\partial x^4} \right) + A_s \left(\frac{\partial^2 w_s}{\partial x^2} \right) = I_0 \left(\frac{\partial^2 w_b}{\partial t^2} + \frac{\partial^2 w_s}{\partial t^2} \right) + J_1 \frac{\partial^3 u}{\partial x \partial t^2} - J_2 \frac{\partial^4 w_b}{\partial x^2 \partial t^2} - K_2 \frac{\partial^4 w_s}{\partial x^2 \partial t^2} + \left(\frac{k_u k_l}{k_u + k_l} \right) (w_b + w_s) - \left(\frac{k_s k_u}{k_u + k_l} \right) \frac{\partial^2 (w_b + w_s)}{\partial x^2} \quad (30.c)$$

- When the upper spring is removed into the Kerr foundation, the proposed model will be converted for Winkler-Pasternak foundation and the governing equations of motion can be given as

$$A_{11} \left(\frac{\partial^2 u}{\partial x^2} \right) - B_{11} \left(\frac{\partial^3 w_b}{\partial x^3} \right) - B_s \left(\frac{\partial^3 w_s}{\partial x^3} \right) = I_0 \frac{\partial^2 u}{\partial t^2} - I_1 \frac{\partial^3 w_b}{\partial x \partial t^2} - J_1 \frac{\partial^3 w_s}{\partial x \partial t^2} \quad (31.a)$$

$$B_{11} \left(\frac{\partial^3 u}{\partial x^3} \right) - D_{11} \left(\frac{\partial^4 w_b}{\partial x^4} \right) - D_s \left(\frac{\partial^4 w_s}{\partial x^4} \right) = I_0 \left(\frac{\partial^2 w_b}{\partial t^2} + \frac{\partial^2 w_s}{\partial t^2} \right) + I_1 \frac{\partial^3 u}{\partial x \partial t^2} - I_2 \frac{\partial^4 w_b}{\partial x^2 \partial t^2} - J_2 \frac{\partial^4 w_s}{\partial x^2 \partial t^2} + (k_l)(w_b + w_s) - (k_s) \frac{\partial^2 (w_b + w_s)}{\partial x^2}$$

(31.b)

$$B_s \left(\frac{\partial^3 u}{\partial x^3} \right) - D_s \left(\frac{\partial^4 w_b}{\partial x^4} \right) - H_s \left(\frac{\partial^4 w_s}{\partial x^4} \right) + A_s \left(\frac{\partial^2 w_s}{\partial x^2} \right) = I_0 \left(\frac{\partial^2 w_b}{\partial t^2} + \frac{\partial^2 w_s}{\partial t^2} \right) + J_1 \frac{\partial^3 u}{\partial x \partial t^2} - J_2 \frac{\partial^4 w_b}{\partial x^2 \partial t^2} - K_2 \frac{\partial^4 w_s}{\partial x^2 \partial t^2} + (k_l)(w_b + w_s) - (k_s) \frac{\partial^2 (w_b + w_s)}{\partial x^2} \quad (31.c)$$

- If the upper spring and shear layer are detached from the Kerr foundation, the proposed model will be changed for Winkler foundation and the governing equations of motion can be depicted as

$$A_{11} \left(\frac{\partial^2 u}{\partial x^2} \right) - B_{11} \left(\frac{\partial^3 w_b}{\partial x^3} \right) - B_s \left(\frac{\partial^3 w_s}{\partial x^3} \right) = I_0 \frac{\partial^2 u}{\partial t^2} - I_1 \frac{\partial^3 w_b}{\partial x \partial t^2} - J_1 \frac{\partial^3 w_s}{\partial x \partial t^2} \quad (32.a)$$

$$B_{11} \left(\frac{\partial^3 u}{\partial x^3} \right) - D_{11} \left(\frac{\partial^4 w_b}{\partial x^4} \right) - D_s \left(\frac{\partial^4 w_s}{\partial x^4} \right) = I_0 \left(\frac{\partial^2 w_b}{\partial t^2} + \frac{\partial^2 w_s}{\partial t^2} \right) + I_1 \frac{\partial^3 u}{\partial x \partial t^2} - I_2 \frac{\partial^4 w_b}{\partial x^2 \partial t^2} - J_2 \frac{\partial^4 w_s}{\partial x^2 \partial t^2} + (k_l)(w_b + w_s)$$

(32.b)

$$B_s \left(\frac{\partial^3 u}{\partial x^3} \right) - D_s \left(\frac{\partial^4 w_b}{\partial x^4} \right) - H_s \left(\frac{\partial^4 w_s}{\partial x^4} \right) + A_s \left(\frac{\partial^2 w_s}{\partial x^2} \right) = I_0 \left(\frac{\partial^2 w_b}{\partial t^2} + \frac{\partial^2 w_s}{\partial t^2} \right) + J_1 \frac{\partial^3 u}{\partial x \partial t^2} - J_2 \frac{\partial^4 w_b}{\partial x^2 \partial t^2} - K_2 \frac{\partial^4 w_s}{\partial x^2 \partial t^2} + (k_l)(w_b + w_s)$$

(32.c)

3. Solution methodology

In the present analysis, Navier's method [60-62] and shifted Chebyshev polynomial based Rayleigh-Ritz method [63] have been utilized to solve governing differential equations for free vibration of the FG beam. Navier's technique has been exploited for Hinged-Hinged (HH) boundary condition, whereas the shifted Chebyshev polynomial based Rayleigh-Ritz is adopted to solve Hinged-Hinged (HH), Clamped-Clamped (CC), Clamped- Hinged (CH), and Clamped-Free (CF) boundary conditions. Further descriptions of each approach are presented in the subsections below.

3.1 Implementation of Navier's method

According to the Navier's technique the axial displacement $u(x, t)$, bending $w_b(x, t)$ and shear $w_s(x, t)$ components of transverse the displacement endorse the solution as shown below [58];

$$u(x, t) = \sum_{m=1}^{\infty} u_m \cos\left(\frac{m\pi}{L}x\right) e^{i\omega t} \quad (33.a)$$

$$w_b(x, t) = \sum_{m=1}^{\infty} w_{bm} \sin\left(\frac{m\pi}{L}x\right) e^{i\omega t} \quad (33.b)$$

$$w_s(x, t) = \sum_{m=1}^{\infty} w_{sm} \sin\left(\frac{m\pi}{L}x\right) e^{i\omega t} \quad (33.c)$$

In which u_m , w_{bm} , and w_{sm} are arbitrary parameters and ω is the natural frequency of vibration. Substituting Eq. (33) into the governing equations of motion, i.e., Eq. (30), Eq. (31), Eq. (32),

generalized Eigenvalue problem for free vibration of Kerr, Winkler-Pasternak, and Winkler foundation, respectively will take the form as given in Eq. (34). But, the results for Kerr foundation are only considered (except for comparison) in this investigation as other two foundations are the special cases of Kerr.

$$[\mathbf{K}]\{X\} = \omega^2 [\mathbf{M}]\{X\} \quad (34)$$

$$\text{Here } [\mathbf{K}] = \begin{bmatrix} k_{11} & k_{12} & k_{13} \\ k_{21} & k_{22} & k_{23} \\ k_{31} & k_{32} & k_{33} \end{bmatrix}, [\mathbf{M}] = \begin{bmatrix} m_{11} & m_{12} & m_{13} \\ m_{21} & m_{22} & m_{23} \\ m_{31} & m_{32} & m_{33} \end{bmatrix} \text{ and } \{X\} = [u_m \quad w_{bm} \quad w_{sm}]^T$$

$$k_{11} = -A_{11} \left(\frac{m\pi}{L} \right)^2, \quad k_{22} = -D_{11} \left(\frac{m\pi}{L} \right)^4 - \left(\frac{k_u k_l}{k_u + k_l} \right) - \left(\frac{k_s k_u}{k_u + k_l} \right) \left(\frac{m\pi}{L} \right)^2,$$

$$k_{12} = k_{21} = B_{11} \left(\frac{m\pi}{L} \right)^3, \quad k_{23} = k_{32} = -D_s \left(\frac{m\pi}{L} \right)^4 - \left(\frac{k_u k_l}{k_u + k_l} \right) - \left(\frac{k_s k_u}{k_u + k_l} \right) \left(\frac{m\pi}{L} \right)^2,$$

$$k_{13} = k_{31} = B_s \left(\frac{m\pi}{L} \right)^3, \quad k_{33} = -H_s \left(\frac{m\pi}{L} \right)^4 - A_s \left(\frac{m\pi}{L} \right)^2.$$

$$m_{11} = -I_0, \quad m_{12} = m_{21} = I_1 \left(\frac{m\pi}{L} \right), \quad m_{23} = m_{32} = -I_0 - J_2 \left(\frac{m\pi}{L} \right)^2,$$

$$m_{22} = -I_0 - I_2 \left(\frac{m\pi}{L} \right)^2, \quad m_{13} = m_{31} = J_1 \left(\frac{m\pi}{L} \right), \quad m_{33} = -I_0 - K_2 \left(\frac{m\pi}{L} \right)^2.$$

3.2 Implementation shifted Chebyshev polynomial based Rayleigh-Ritz method

In this study, the shifted Chebyshev polynomial of the first kind is considered as shape function over algebraic polynomials because of the fact that Chebyshev polynomials are the orthogonal polynomials which reduce the computational effort, and for the larger value of n ($n > 10$), the system avoids ill-conditioning. First few terms of shifted Chebyshev polynomials of the first kind can be expressed as [63],

$$\phi_0(x) = 1$$

$$\phi_1(x) = 2x - 1 \quad (35)$$

$$\phi_n(x) = 2(2x-1)\phi_{n-1}(x) - \phi_{n-2}(x), \quad n = 2, 3, \dots$$

The axial displacement $u(x,t)$, bending $w_b(x,t)$ and shear $w_s(x,t)$ components of transverse displacement can be stated as [9, 63-65]

$$U(x) = x^p(L-x)^q \sum_{i=1}^n c_i \phi_{i-1}(x) \quad (36.a)$$

$$W_b(x) = x^p(L-x)^q \sum_{i=1}^n d_i \phi_{i-1}(x) \quad (36.b)$$

$$W_s(x) = x^p(L-x)^q \sum_{i=1}^n e_i \phi_{i-1}(x) \quad (36.c)$$

Here c_i 's, d_i 's, and e_i 's are unknown parameters, $\phi_n(x)$ is the shifted Chebyshev polynomial of index n , $x^p(L-x)^q$ is the admissible functions and p , q are the exponent that regulate the boundary conditions as shown in Table 1.

Table 1 p and q for different boundary conditions [9, 63, 65].

B.C.	p	q
H-H	1	1
C-H	2	1
C-C	2	2
C-F	2	0

Plugging Eq. (36) into maximum strain energy (S_e^{Max}), kinetic energy (K_e^{Max}), and work done by Kerr foundation (W_e^{Max}), i.e., Eqs. (15-17) and equating as $S_e^{Max} + W_e^{Max} = K_e^{Max}$ and minimizing the natural frequency (ω^2) with respect to the coefficients c_i 's, d_i 's, and e_i 's, $i = 1, 2, 3, \dots, n$, yield the generalized eigenvalue problem as

$$[\mathbf{K}]\{X\} = \omega^2 [\mathbf{M}]\{X\} \quad (37)$$

where $\{X\} = [c_1, c_2, c_3, \dots, c_n, d_1, d_2, d_3, \dots, d_n, e_1, e_2, e_3, \dots, e_n]^T$, $[\mathbf{K}]$ denotes the stiffness matrix and $[\mathbf{M}]$ represents the mass matrix.

4. Numerical results and discussion

In this study, the functionally graded beam is assumed to be composed of Stainless steel (SUS304) as a metal constituent and Silicon nitride (Si_3N_4) as a ceramic constituent with their mechanical properties as [66, 67]

Silicon nitride (Si_3N_4): $E_c = 348.43 \text{ GPa}$, $\rho_c = 2370 \text{ Kg.m}^{-3}$, and $\nu_c = 0.24$

Stainless steel (SUS304): $E_m = 201.04 \text{ GPa}$, $\rho_m = 8166 \text{ Kg.m}^{-3}$, and $\nu_m = 0.3262$.

The dimension of the FG beam is taken as width ($b = 0.05 \text{ m}$) \times thickness ($h = 0.0125 \text{ m}$) \times length ($L = 1 \text{ m}$). Natural frequencies (ω) for four essential boundary conditions such as Hinged-Hinged (HH), Clamped-Hinged (CH), Clamped-Clamped (CC), and Clamped-Free are taken into the investigation in this investigation by employing Navier's technique for HH boundary condition and shifted Chebyshev polynomial based Rayleigh-Ritz method for all the boundary conditions mentioned above.

4.1 Validation

Through this subsection, the present model is validated in two ways. Firstly, the current results are compared with other existing works present in literature, in special cases. In this regard, the first three non-dimensional frequency parameters of the present model are compared with [7, 68] for different power-law index by neglecting the elastic foundation and porosity effect from the present investigation. For the validation purpose, all the parameters are kept the same as [7, 68] and the tabular results are depicted in Table 2. Secondly, natural frequencies of the first four modes of Hinged-hinged boundary condition are computed by using an analytical method, i.e., Navier's method and numerical method, such as shifted Chebyshev polynomial based Rayleigh-Ritz method with porosity index $\psi = 0.1$, $k_u = k_l = 1 \text{ GPa}$, $k_s = 1 \text{ GN}$ and other parameters are taken as given as above section. A comparison of the natural frequencies is demonstrated in Table 3. From these results, one may perceive that the current model goes well with other established outcomes.

Table 2 Validation of the present model for HH boundary condition with [7, 68] in special cases.

Mode		$k = 0$	$k = 1$	$k = 2$	$k = 5$	$k = 10$
1	[7]	5.1531	3.9907	3.6263	3.3998	3.2811

	[68]	5.1531	3.9907	3.6263	3.3998	3.2811
	Present	5.1531	3.9906	3.6263	3.9997	3.2811
2	[7]	17.8868	14.0138	12.6411	11.5324	11.0216
	Present	17.8868	14.0137	12.6411	11.5324	11.0215
3	[7]	34.2344	27.1152	24.3237	21.6943	20.5581
	Present	34.2344	27.1152	24.3236	21.6943	20.5581

Table 3 Comparisons of results between Navier’s method and shifted Chebyshev polynomial based Rayleigh-Ritz method for HH boundary condition

(k)	ω_1 in kHz		ω_2 in kHz		ω_3 in kHz		ω_4 in kHz	
	NM	SC-RR	NM	SC-RR	NM	SC-RR	NM	SC-RR
0	6.7509	6.7509	13.5018	13.5018	20.2527	20.2531	27.0036	27.1808
0.5	4.3689	4.3688	8.7365	8.7364	13.1014	13.1027	17.4623	17.5788
1	3.7310	3.7308	7.4606	7.4601	11.1875	11.1881	14.9102	15.0088
1.5	3.4230	3.4227	6.8448	6.8440	10.2641	10.2643	13.6798	13.7695
2	3.2397	3.2393	6.4783	6.4775	9.7149	9.7148	12.9483	13.0328

4.2 Convergence

This subsection is dedicated to analyzing the convergence of natural frequencies of the first four modes of HH, CH, CC, and CF boundary conditions by employing the shifted Chebyshev polynomial based Rayleigh-Ritz method. The use of shifted Chebyshev polynomial as a shape function makes the methods more efficient because of orthogonal properties and avoids the system from becoming an ill condition for the higher number of terms. This study is conducted by considering the power-law exponent $(k)=5$, porosity volume fraction $(\psi)=0.1$, $k_u = k_l = 1GPa$, and $k_s = 1GN$ and the graphical results are illustrated in Figs. 5-7. From these results, it is very much evident that the number of polynomials plays a very vital role in the convergence of frequencies. Lower modes frequencies require less number of polynomials whereas higher mode frequencies need more number of terms. It is also observed that first and second mode frequencies are converging with $n = 5$ while third and fourth modes are attending

convergence at $n=6$, which is almost the same for all the boundary conditions mentioned in this study.

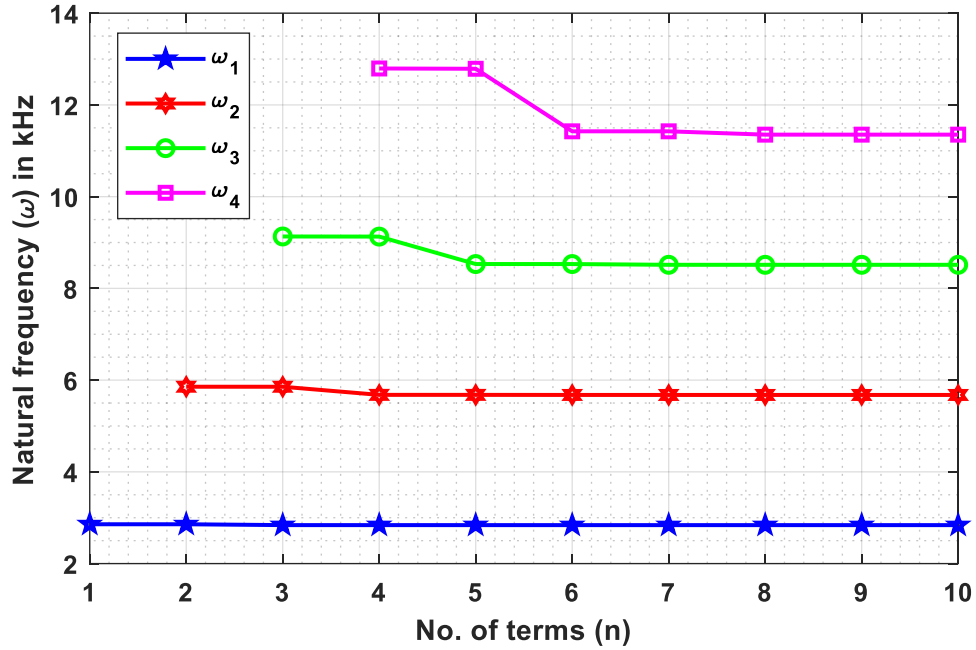


Fig. 5 Convergence of natural frequency for HH boundary condition

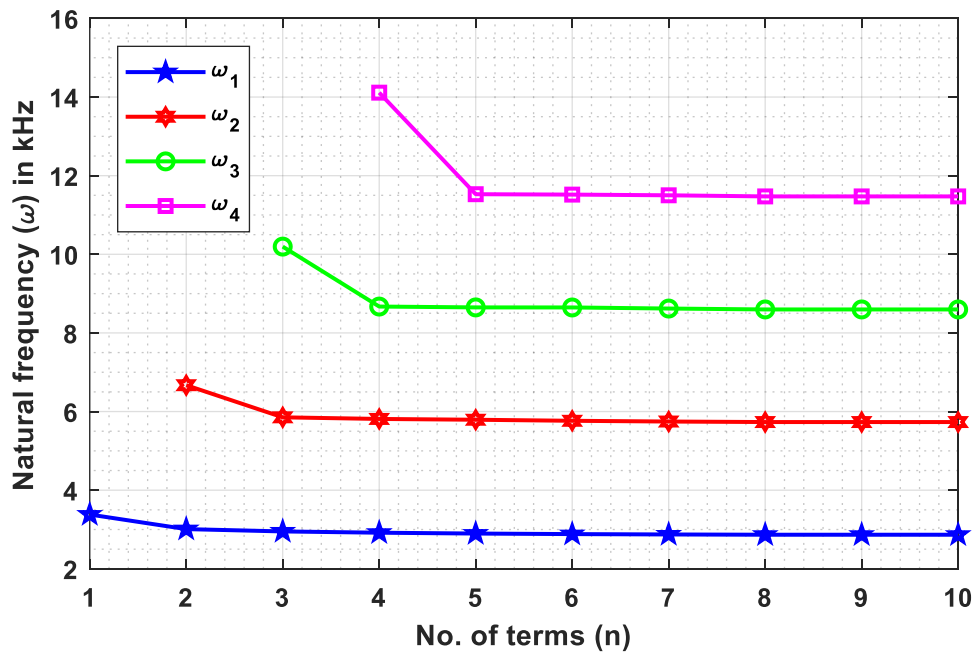


Fig. 6 Convergence of natural frequency for CH boundary condition

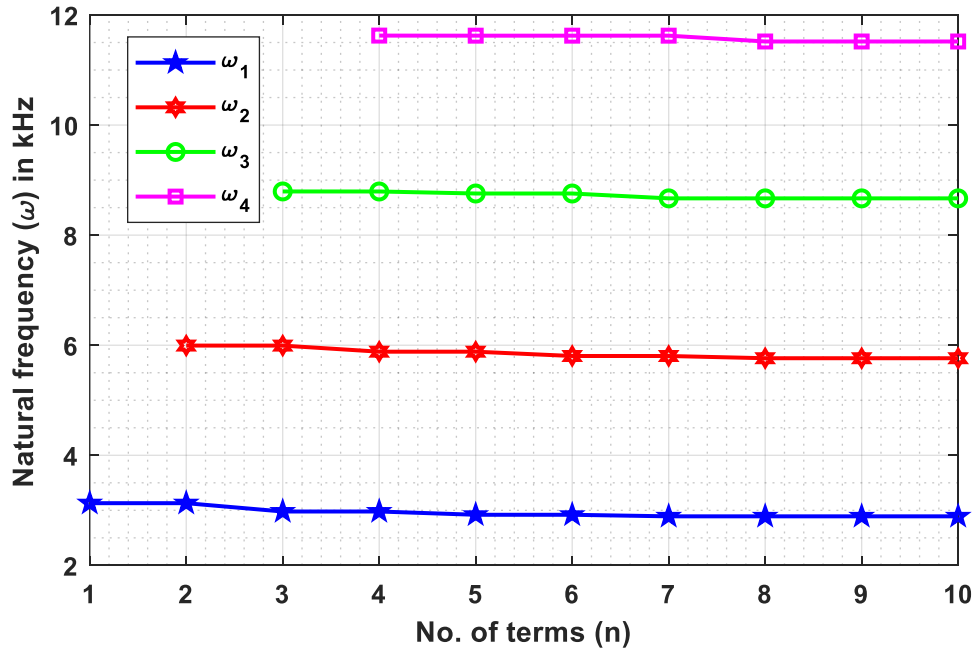


Fig. 7 Convergence of natural frequency for CC boundary condition

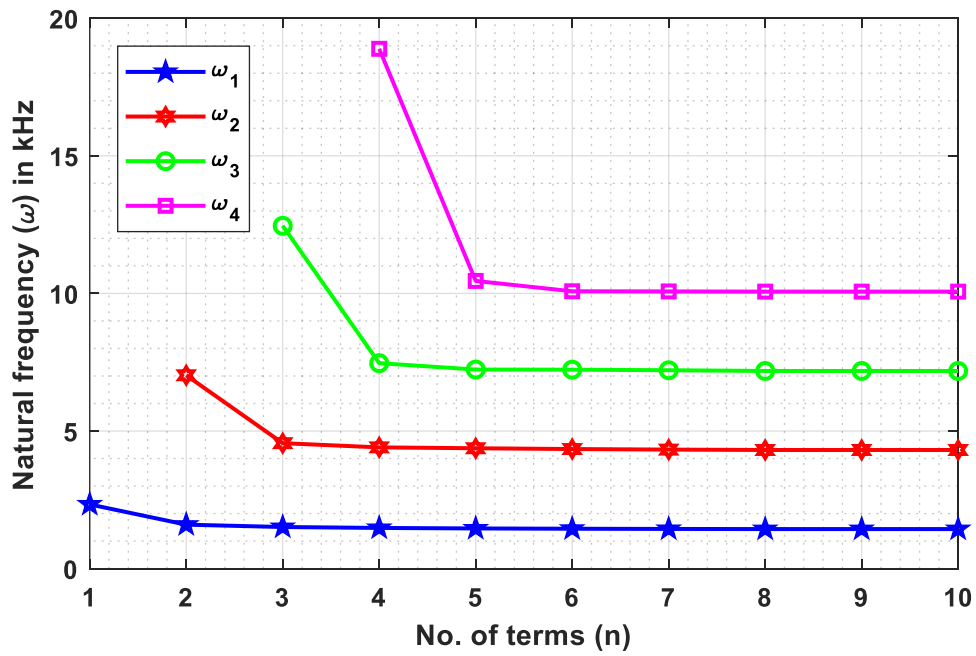


Fig. 8 Convergence of natural frequency for CF boundary condition

4.3 Effect of Power-law exponent (k)

Through this subsection, the effect of the power-law index has been studied on the first four modes of natural frequencies of the FG beam considering HH, CH, CC, and CF boundary conditions. Both the tabular and graphical results are computed with porosity volume fraction (ψ) = 0.1, $k_u = k_l = 1\text{GPa}$, $k_s = 1\text{GN}$ and power-law exponent are varied as 0, 0.2, 0.5, 1, 2, 3, 5, and 10, which are illustrated in Table 4 and Figs. 9-12. From this study, it is quite evident that with the rise in the power-law exponent, the natural frequencies of all the modes decrease and this reduction is more remarkable when $k < 2$. This can be explained by the fact that at $k = 0$, the beam is purely ceramic possesses the highest natural frequencies while at $k = \infty$, the beam is pure metal having the lowest natural frequencies i.e., as we go on increasing the power-law exponent (k), Young's modulus of the FG beam decreases which leads to higher flexibility and lower natural frequencies.

Table 4 Variation of natural frequencies (ω) with power-law exponent (k)

B.C.	k	ω_1 in kHz	ω_2 in kHz	ω_3 in kHz	ω_4 in kHz
HH	0	6.7509	13.5018	20.2527	27.0036
	0.2	5.2715	10.5423	15.8115	21.0784
	0.5	4.3689	8.7365	13.1014	17.4623
	1	3.7310	7.4606	11.1875	14.9102
	2	3.2397	6.4783	9.7149	12.9483
	3	3.0302	6.0596	9.0876	12.1133
	5	2.8386	5.6768	8.5142	11.3504
	10	2.6772	5.3543	8.0311	10.7074
CH	0	6.8350	13.6678	20.5057	27.3626
	0.2	5.3373	10.6721	16.0100	21.3604
	0.5	4.4233	8.8439	13.2662	17.6967
	1	3.7774	7.5520	11.3279	15.1098
	2	3.2798	6.5575	9.8363	13.1208
	3	3.0678	6.1337	9.2010	12.2743
	5	2.8739	5.7463	8.6205	11.5011

	10	2.7105	5.4200	8.1313	10.8497
CC	0	6.8756	13.8042	20.6180	27.6540
	0.2	5.3691	10.7787	16.0978	21.5878
	0.5	4.4498	8.9324	13.3393	17.8854
	1	3.8001	7.6279	11.3907	15.2713
	2	3.2996	6.6234	9.8910	13.2612
	3	3.0862	6.1954	9.2521	12.4057
	5	2.8911	5.8040	8.6681	11.6240
	10	2.7267	5.4742	8.1760	10.9654
CF	0	3.4290	10.2850	17.1439	23.9586
	0.2	2.6776	8.0311	13.3859	18.7046
	0.5	2.2192	6.6558	11.0926	15.4981
	1	1.8952	5.6839	9.4724	13.2336
	2	1.6456	4.9354	8.2253	11.4916
	3	1.5392	4.6163	7.6938	10.7497
	5	1.4418	4.3246	7.2079	10.0718
	10	1.3598	4.0787	6.7985	9.5005

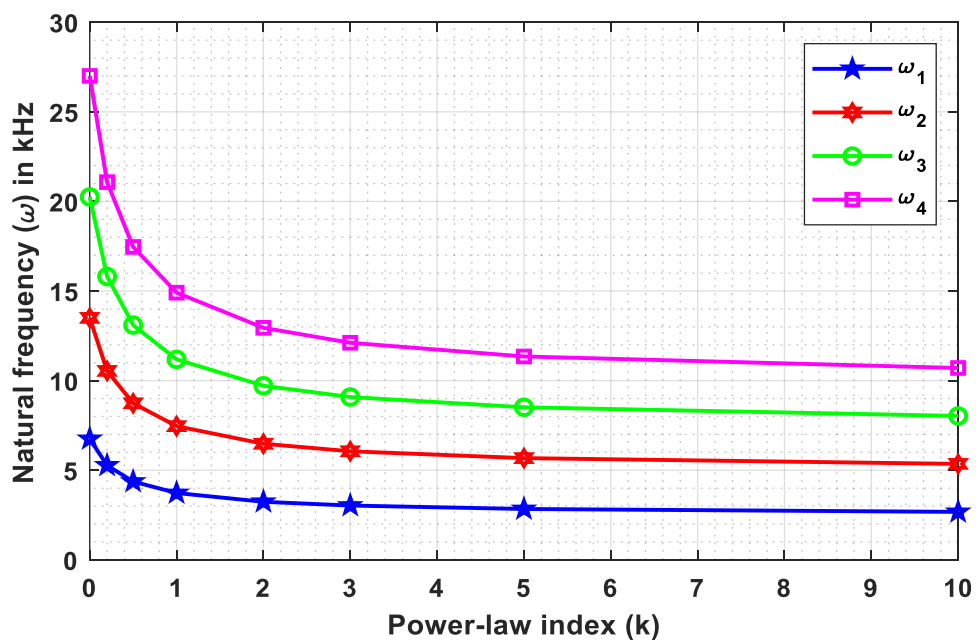


Fig. 9 Variation of the natural frequency with the power-law index for HH boundary condition

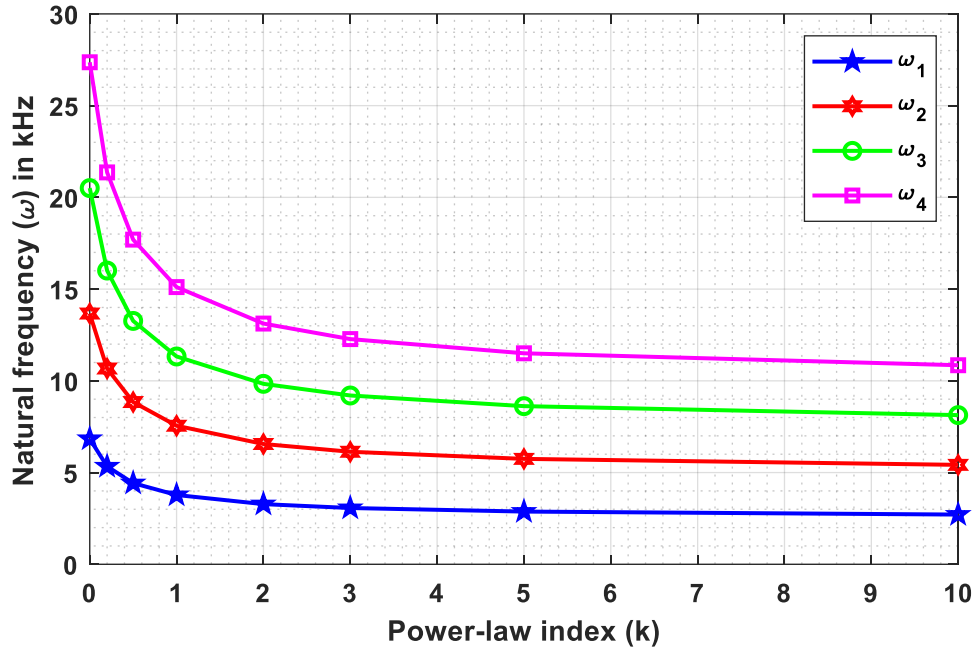


Fig. 10 Variation of the natural frequency with power-law index for CH boundary condition

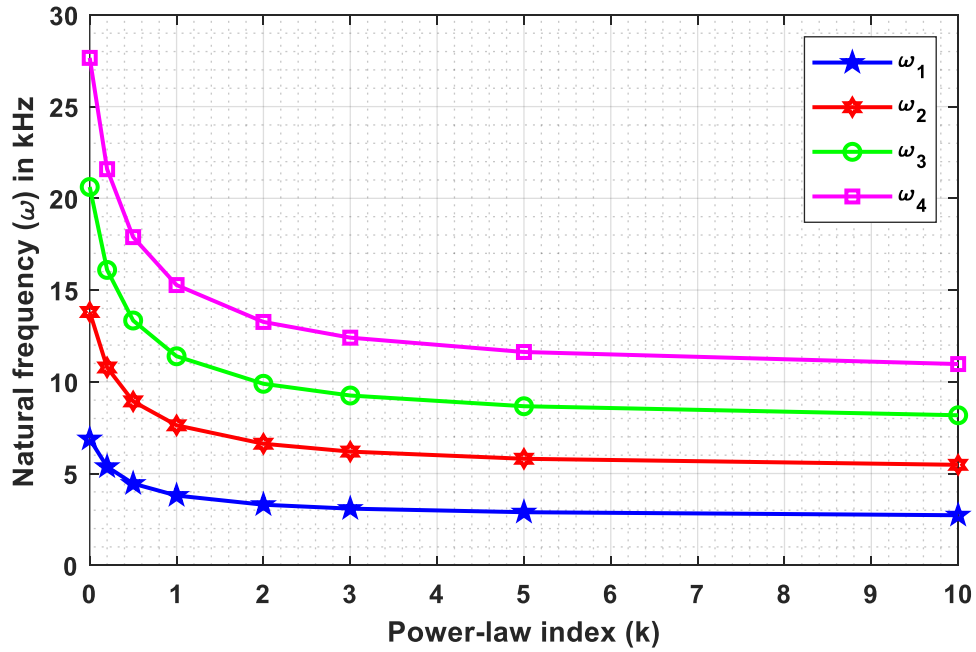


Fig. 11 Variation of the natural frequency with the power-law index for CC boundary condition

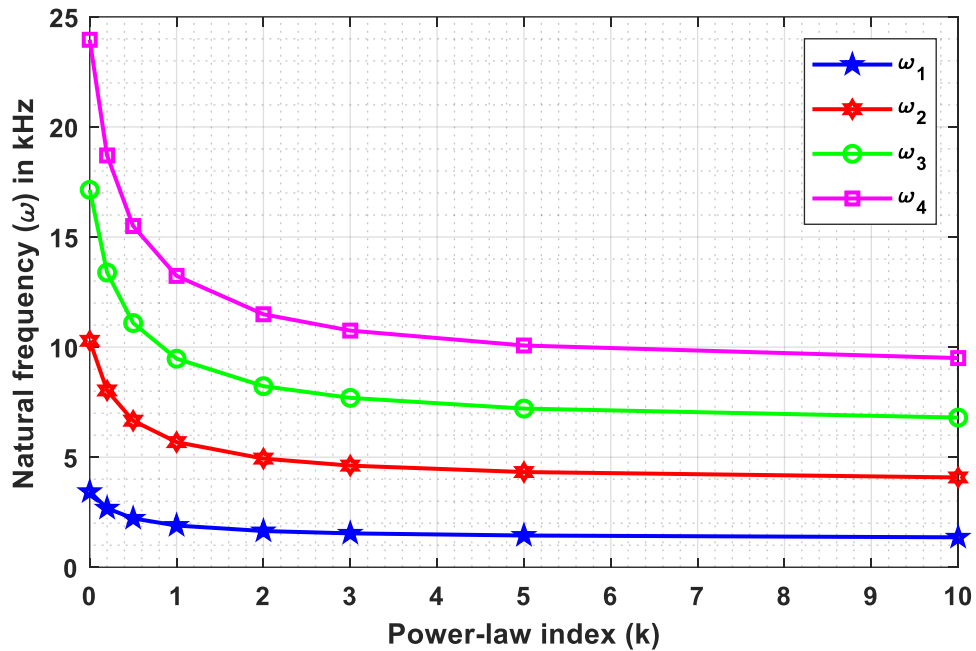


Fig. 12 Variation of the natural frequency with the power-law index for CF boundary condition

4.4 Effect of porosity volume fraction (ψ)

In the present investigation, the FG beam is considered as a porous beam with evenly distributed porosity along the thickness of the beam. Graphical and tabular results are computed by considering $k_u = k_l = 1GPa$, $k_s = 1GN$ and by varying both the power-law index (k) and porosity volume fraction (ψ). From these results, it can be concluded that with the increase in porosity index (ψ), natural frequencies also increase when the FG beam is purely ceramic, i.e., at $k = 0$. This is due to the fact that the beam becomes stiffer, which ultimately gives rise to the natural frequencies. On the other hand, for different values of power-law index i.e., $k = 1, 2, 10$ etc., this trend is completely opposite, that means, natural frequencies reduce with the rise in porosity volume fraction. Also, this trend is more significant in the case of higher values of k . Based on these observations, it may be concluded that the rise or fall of natural frequencies depends upon the power-law index even if the porosity index follows an increasing or decreasing trend. Since the trend is similar for other boundary conditions, only results of HH edge support is exclusively provided in the study.

Table 5 Variation of natural frequencies (ω) porosity volume fraction (ψ) for HH boundary condition

k	ψ	ω_1 in kHz	ω_2 in kHz	ω_3 in kHz	ω_4 in kHz
0	0	6.2450	12.4901	18.7351	24.9802
	0.1	6.7509	13.5018	20.2527	27.0036
	0.2	7.5944	15.1888	22.7833	30.3777
	0.3	9.2896	18.5793	27.8690	37.1586
	0.4	15.1862	30.3725	45.5588	60.7451
1	0	3.7618	7.5225	11.2808	15.0355
	0.1	3.7310	7.4606	11.1875	14.9102
	0.2	3.7040	7.4064	11.1054	14.7995
	0.3	3.6807	7.3593	11.0338	14.7021
	0.4	3.6607	7.3188	10.9716	14.6163
5	0	2.9433	5.8863	8.8286	11.7698
	0.1	2.8386	5.6768	8.5142	11.3504
	0.2	2.7224	5.4444	8.1653	10.8849
	0.3	2.5889	5.1773	7.7645	10.3499
	0.4	2.4291	4.8575	7.2844	9.7091
10	0	2.7930	5.5859	8.3786	11.1708
	0.1	2.6772	5.3543	8.0311	10.7074
	0.2	2.5479	5.0957	7.6432	10.1901
	0.3	2.3987	4.7972	7.1953	9.5928
	0.4	2.2192	4.4381	6.6565	8.8742

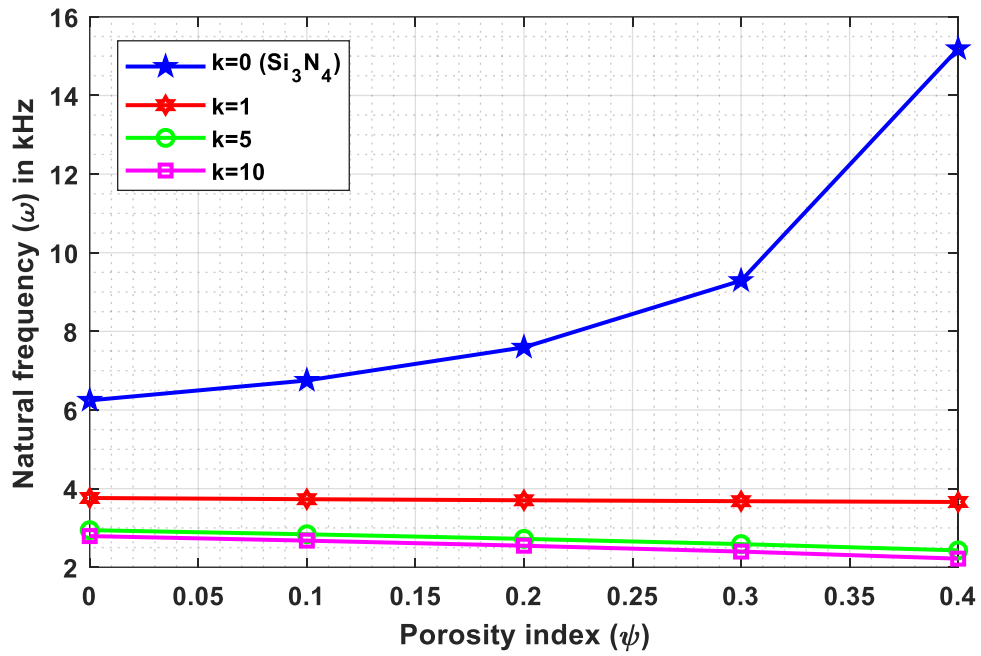


Fig. 13 Variation of the natural frequency with porosity index for 1st mode

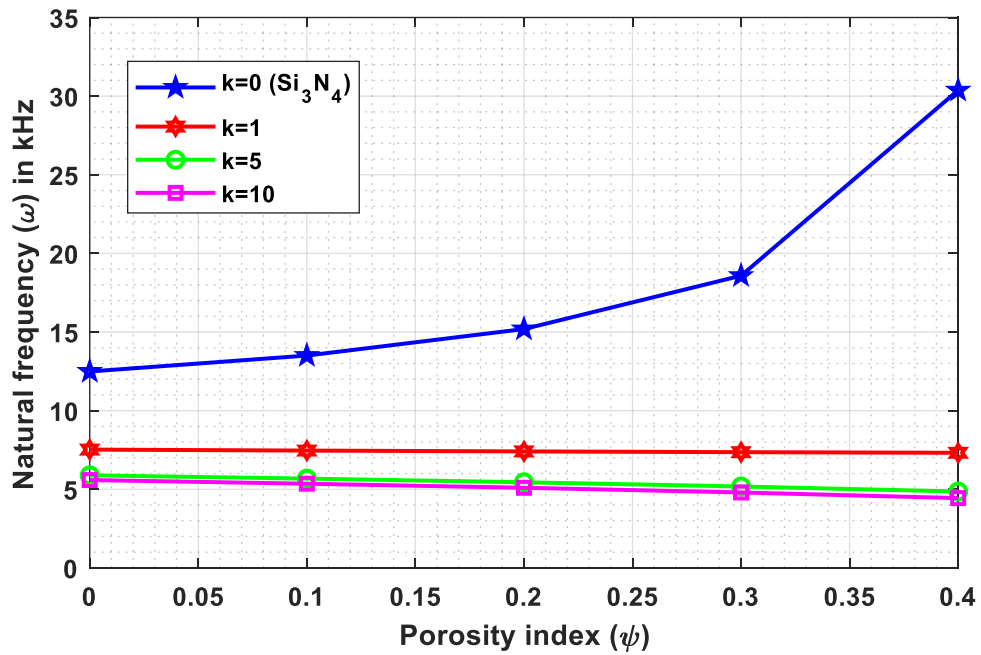


Fig. 14 Variation of the natural frequency with porosity index for 2nd mode

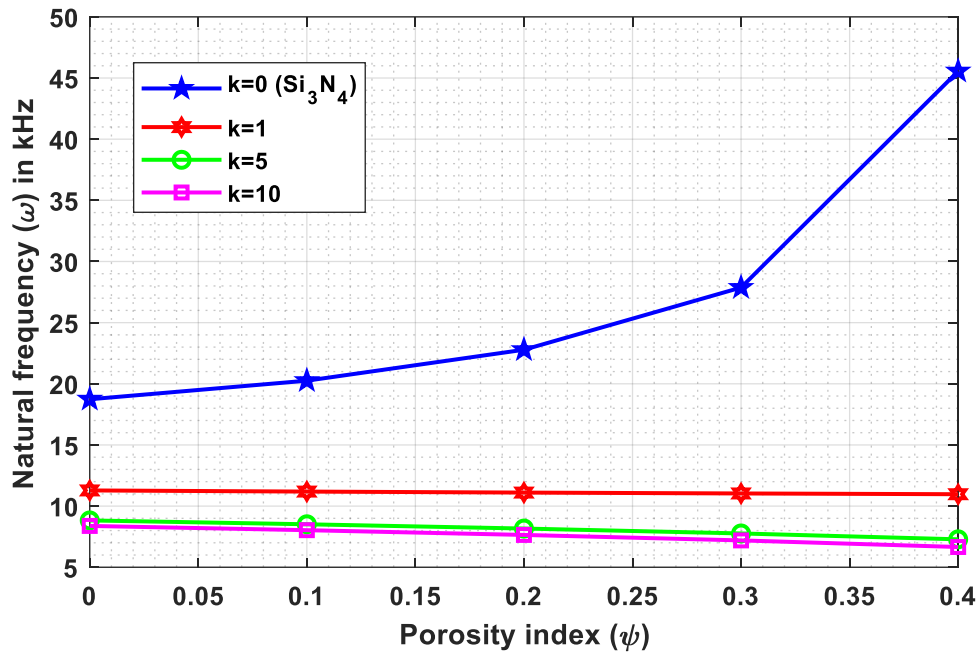


Fig. 15 Variation of the natural frequency with porosity index for 3rd mode

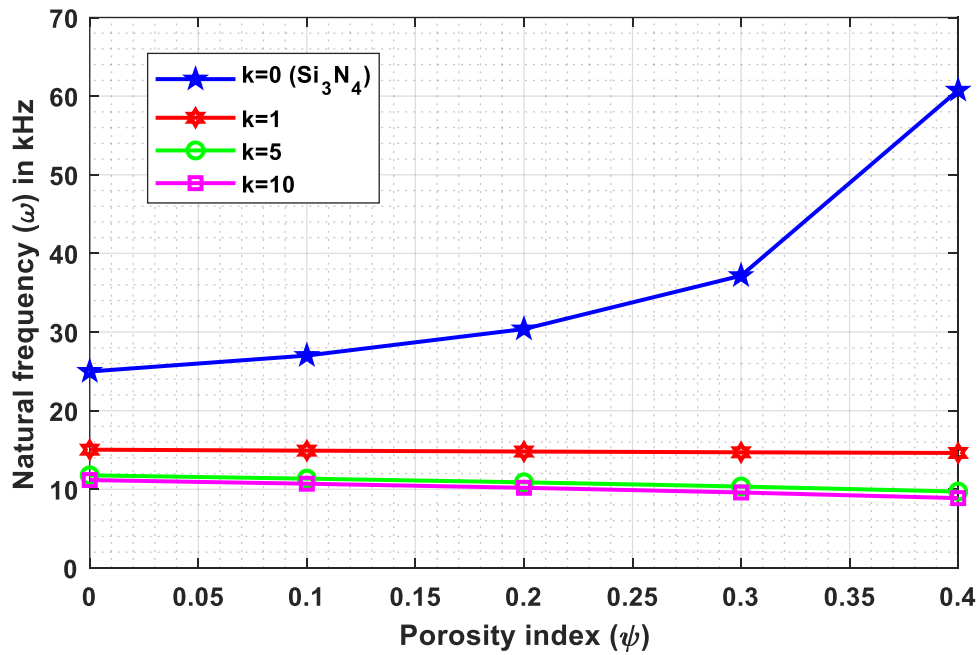


Fig. 16 Variation of the natural frequency with porosity index for 4th mode

4.5 Effect of elastic foundation

This subsection is aimed at analyzing the effect of the Kerr elastic foundation along with Winkler-Pasternak and Winkler foundations in special cases on the natural frequencies of HH, CH, CC, and CF boundary conditions. For the computational purpose, the power-law index (k) is taken as 0.5, and the porosity volume fraction (ψ) is considered as 0.1. For Kerr elastic foundation, the elastic moduli of upper and lower springs are equally varying as $0, 10^3, 10^6, 10^9, 10^{12}$ Pa, while the elastic modulus of shear layer is considered as $0, 10^3, 10^6, 10^9, 10^{12}$ N. Likewise, for the computation of Winkler-Pasternak model, elastic moduli of lower spring and shear layer are taken as $0, 10^3, 10^6, 10^9, 10^{12}$ Pa, and $0, 10^3, 10^6, 10^9, 10^{12}$ N, respectively. Finally, for Winkler foundation model, elastic moduli of lower spring is varies as $0, 10^3, 10^6, 10^9, 10^{12}$ Pa. The tabular results of all the above-mentioned boundary conditions are listed in Table 6. Based on this analysis, we conclude that, with the rise in elastic modulus of Kerr foundation, the natural frequencies of the FG beam display a mixed behavior that means, natural frequencies decrease initially and then increase up to the elastic moduli attain 1 GPa and then exhibit very less change in natural frequencies as we go on increasing elastic moduli. Also, for higher values of elastic constants, natural frequencies for the three types elastic models are almost equal.

Table 6 Variation of natural frequencies (ω) in kHz with various elastic foundations such as Kerr, Winkler-Pasternak, and Winkler elastic foundations

B.C.	$k_u = k_l$ in Pa and k_s in N	Kerr Foundation (k_u, k_l, k_s)			Winkler-Pasternak Foundation (k_l, k_s)			Winkler Foundation (k_l)		
		ω_1	ω_2	ω_3	ω_1	ω_2	ω_3	ω_1	ω_2	ω_3
HH	0	0.0489	0.1946	0.4376	0.0489	0.1946	0.4376	0.0489	0.1946	0.4376
	10^3	0.0483	0.1940	0.4370	0.0477	0.1934	0.4365	0.0488	0.1945	0.4376
	10^6	0.5694	3.7199	4.3835	3.2941	4.3783	5.6509	0.1647	0.4252	0.8017
	10^9	4.3688	8.7363	13.1026	4.3688	8.7363	13.1024	2.5099	4.3749	5.5333
	10^{12}	4.3688	8.7362	13.1022	4.3688	8.7362	13.1022	4.3688	8.7362	13.1022
CH	0	0.0761	0.2462	0.5133	0.0761	0.2462	0.5133	0.0761	0.2462	0.5133
	10^3	0.0757	0.2458	0.5128	0.0752	0.2453	0.5123	0.0760	0.2462	0.5133

	10^6	0.8614	1.8483	4.4219	1.2565	4.4214	6.9309	0.2234	0.5028	0.8735
	10^9	4.4233	8.8439	13.266.	4.4233	8.8438	13.2660	4.4212	6.9453	8.8526
	10^{12}	4.4232	8.8437	13.2657	4.4232	8.8437	13.2657	4.4233	8.8437	13.2658
CC	0	0.1103	0.3038	0.5944	0.1103	0.3038	0.5944	0.1103	0.3038	0.5944
	10^3	0.1100	0.3034	0.5940	0.1097	0.3030	0.5935	0.1103	0.3038	0.5944
	10^6	0.2702	0.8935	2.1698	1.6699	2.8667	4.4501	0.0380	0.2856	0.5854
	10^9	4.4497	8.9324	13.3392	4.4497	8.9323	13.3391	1.7526	4.4500	8.9335
	10^{12}	4.4497	8.9323	13.3389	4.4497	8.9323	13.3389	4.4497	8.9323	13.3389
CF	0	0.0173	0.1086	0.3040	0.0173	0.1086	0.3040	0.0173	0.1086	0.3040
	10^3	0.0164	0.1078	0.3033	0.0154	0.1070	0.3026	0.0170	0.1086	0.3040
	10^6	1.0636	2.2196	6.6472	0.0280	2.2194	6.1669	0.0328	0.2858	0.5865
	10^9	2.2191	6.6557	11.0926	2.2191	6.6557	11.0925	2.2193	6.6485	7.1460
	10^{12}	2.2191	6.6557	11.0923	2.2191	6.6557	11.0923	2.2191	6.6557	11.0924

5. Conclusion

In this investigation, the shifted Chebyshev polynomial based Rayleigh-Ritz method is implemented to analyzing the vibration characteristics of the FG beam placed on the Kerr foundation, having evenly distributed porosity along the thickness. Energy equations are developed for the use shifted Chebyshev polynomial based Rayleigh-Ritz method, and Navier's solution based model has also been implemented to solve the governing equations of motion in terms of displacement derived from Hamilton's principle. A parametric analysis is also conducted, and followings are the main results;

- Lower modes frequencies such as first and second mode require number of polynomials $n = 5$ for the convergence while higher mode frequencies i.e., third and fourth modes need more number of terms, i.e., $n = 6$ for achieving the convergence.
- With the increase in the power-law exponent (k), the natural frequencies of all the modes decrease, and this reduction is more remarkable when $k < 2$. Also, at $k = 0$, the beam is purely ceramic possesses the highest value natural frequencies while at $k = \infty$, the beam is purely metallic with the lowest value natural frequencies.

- With the rise of porosity volume (ν), natural frequencies at $k=0$, i.e., purely ceramic, while for other values of the power-law index, i.e., $k=1,2,10$ etc., this trend is opposite, that means, natural frequencies reduce with the rise in porosity volume fraction.
- With the increase in elastic modulus of Kerr foundation, the natural frequencies of the FG beam display a mixed behavior, natural frequencies decrease initially, and then increase up to the elastic moduli attain 1 GPa and then exhibit very less change towards the natural frequencies as we go on increasing elastic moduli. Also, for higher values of elastic constants, natural frequencies for the three types of elastic models are almost equal.

Acknowledgment

The first two authors would like to acknowledge Defence Research & Development Organization (DRDO), New Delhi, India (Sanction Code: DG/TM/ERIPR/GIA/17-18/0129/020) for the funding to carry out the present research work.

References

- [1] Sina SA, Navazi HM, Haddadpour H (2009) An analytical method for free vibration analysis of functionally graded beams. *Materials and Design* 30:741–747
- [2] Ke LL, Yang J, Kitipornchai S (2010) An analytical study on the nonlinear vibration of functionally graded beams. *Meccanica* 45:743–752
- [3] Hein H, Feklistova L (2011) Free vibrations of non-uniform and axially functionally graded beams using Haar wavelets. *Engineering Structures* 33:3696–3701
- [4] Shooshtari A, Rafiee M (2011) Nonlinear forced vibration analysis of clamped functionally graded beams. *Acta Mechanica* 221:23–38
- [5] Wattanasakulpong N, Prusty BG, Kelly DW (2011) Thermal buckling and elastic vibration of third-order shear deformable functionally graded beams. *International Journal of Mechanical Sciences* 53:734–743

- [6] Wattanasakulpong N, Prusty BG, Kelly DW, Hoffman M (2012) Free vibration analysis of layered functionally graded beams with experimental validation. *Materials and Design* 36:182–190
- [7] Thai HT, Vo TP (2012) Bending and free vibration of functionally graded beams using various higher-order shear deformation beam theories. *International Journal of Mechanical Sciences* 62: 57–66
- [8] Fallah A, Aghdam MM (2012) Thermo-mechanical buckling and nonlinear free vibration analysis of functionally graded beams on nonlinear elastic foundation. *Composites: Part B* 43: 1523-1530
- [9] Pradhan KK, Chakraverty S (2013) Free vibration of Euler and Timoshenko functionally graded beams by Rayleigh–Ritz method. *Composites: Part B* 51:175–184
- [10] Rahimi G H, Gazor M S, Hemmatnezhad M, Toorani H (2013) On the post buckling and free vibrations of FG Timoshenko beams. *Composite Structures* 95:247–253
- [11] Vo TP, Thai HT, Nguyen TK, Maheri A, Lee J (2014) Finite element model for vibration and buckling of functionally graded sandwich beams based on a refined shear deformation theory. *Engineering Structures* 64:12–22
- [12] Kanani AS, Niknam H, Ohadi AR, Aghdam MM (2014) Effect of nonlinear elastic foundation on large amplitude free and forced vibration of functionally graded beam. *Composite Structures* 115:60-68
- [13] Nguyen TK, Nguyen TTP, Vo TP, Thai HT (2015) Vibration and buckling analysis of functionally graded sandwich beams by a new higher-order shear deformation theory. *Composites Part B: Engineering* 76:273-285
- [14] Su H, Banerjee JR (2015) Development of dynamic stiffness method for free vibration of functionally graded Timoshenko beams. *Computers and Structures* 147:107–116
- [15] Tossapanon P, Wattanasakulpong N (2016) Stability and free vibration of functionally graded sandwich beams resting on two-parameter elastic foundation. *Composite Structures* 142:215-225

- [16] Huang Y, Zhang M, Rong H (2016) Buckling Analysis of Axially Functionally Graded and Non-Uniform Beams Based on Timoshenko Theory. *Acta Mechanica Solida Sinica* 29:200-207
- [17] Chen D, Yang J, Kitipornchai S (2016) Free and forced vibrations of shear deformable functionally graded porous beams. *International Journal of Mechanical Sciences* 108–109:14-22.
- [18] Jing LL, Ming PJ, Zhang WP, Fu LR, Cao YP (2016) Static and free vibration analysis of functionally graded beams by combination Timoshenko theory and finite volume method. *Composite Structures* 138:192-213
- [19] Sedighi HM, Shirazi KH, Attarzadeh MA (2013) A study on the quintic nonlinear beam vibrations using asymptotic approximate approaches. *Acta Astronautica* 91:245-50
- [20] Sedighi HM, Shirazi KH, Noghrehabadi A (2012) Application of recent powerful analytical approaches on the non-linear vibration of cantilever beams. *International Journal of Nonlinear Sciences and Numerical Simulation* 13(7-8):487-94
- [21] Sedighi HM, Daneshmand F (2014) Nonlinear transversely vibrating beams by the homotopy perturbation method with an auxiliary term. *Journal of Applied and Computational Mechanics* 1(1):1-9
- [22] Esmaeili M, Tadi Beni Y (2019) Vibration and Buckling Analysis of Functionally Graded Flexoelectric Smart Beam. *Journal of Applied and Computational Mechanics* 5(5):900-17
- [23] Karami B, Janghorban M, Rabczuk T (2020) Dynamics of two-dimensional functionally graded tapered Timoshenko nanobeam in thermal environment using nonlocal strain gradient theory. *Composites Part B: Engineering* 182:107622
- [24] Karami B, Janghorban M, Li L (2018) On guided wave propagation in fully clamped porous functionally graded nanoplates. *Acta Astronautica* 143:380-90
- [25] She GL, Yuan FG, Karami B, Ren YR, Xiao WS (2019) On nonlinear bending behavior of FG porous curved nanotubes. *International Journal of Engineering Science* 135:58-74
- [26] She GL, Jiang XY, Karami B (2019) On thermal snap-buckling of FG curved nanobeams. *Materials Research Express* 6(11):115008

- [27] Karami B, Shahsavari D, Janghorban M, Li L (2020) Free vibration analysis of FG nanoplate with poriferous imperfection in hygrothermal environment. *Structural Engineering and Mechanics* 73(2):191
- [28] Karami B, Shahsavari D, Janghorban M, Li L (2019) On the resonance of functionally graded nanoplates using bi-Helmholtz nonlocal strain gradient theory. *International Journal of Engineering Science* 144:103143
- [29] Karami B, Shahsavari D, Li L (2018) Temperature-dependent flexural wave propagation in nanoplate-type porous heterogenous material subjected to in-plane magnetic field. *Journal of Thermal Stresses* 41(4):483-99
- [30] Karami B, Janghorban M (2019) On the dynamics of porous nanotubes with variable material properties and variable thickness. *International Journal of Engineering Science* 136:53-66.
- [31] Alimirzaei S, Mohammadimehr M, Tounsi A (2019) Nonlinear analysis of viscoelastic micro-composite beam with geometrical imperfection using FEM: MSGT electro-magneto-elastic bending, buckling and vibration solutions. *Structural Engineering and Mechanics* 71(5):485-502
- [32] Karami B, Janghorban M, Tounsi A (2019) Galerkin's approach for buckling analysis of functionally graded anisotropic nanoplates/different boundary conditions. *Engineering with Computers* 35(4):1297-316
- [33] Tounsi A, Al-Dulaijan SU, Al-Osta MA, Chikh A, Al-Zahrani MM, Sharif A, Tounsi A (2020) A four variable trigonometric integral plate theory for hygro-thermo-mechanical bending analysis of AFG ceramic-metal plates resting on a two-parameter elastic foundation. *Steel and Composite Structures* 34(4):511-524
- [34] Addou FY, Meradjah M, Bousahla AA, Benachour A, Bourada F, Tounsi A, Mahmoud SR (2019) Influences of porosity on dynamic response of FG plates resting on Winkler/Pasternak/Kerr foundation using quasi 3D HSDT. *Computers and Concrete* 24(4):347-67
- [35] Chaabane LA, Bourada F, Sekkal M, Zerouati S, Zaoui FZ, Tounsi A, Derras A, Bousahla AA, Tounsi A. (2019) Analytical study of bending and free vibration responses of functionally graded beams resting on elastic foundation. *Structural Engineering and Mechanics* 71(2):185-96

- [36] Boukhelif Z, Bouremana M, Bourada F, Bousahla AA, Bourada M, Tounsi A, Al-Osta MA (2019) A simple quasi-3D HSDT for the dynamics analysis of FG thick plate on elastic foundation. *Steel and Composite Structures* 31(5):503-16
- [37] Boulefrakh L, Hebali H, Chikh A, Bousahla AA, Tounsi A, Mahmoud SR (2019) The effect of parameters of visco-Pasternak foundation on the bending and vibration properties of a thick FG plate. *Geomechanics and Engineering* 18(2):161-78
- [38] Kaddari M, Kaci A, Bousahla AA, Tounsi A, Bourada F, Bedia EA, Al-Osta MA (2020) A study on the structural behaviour of functionally graded porous plates on elastic foundation using a new quasi-3D model: bending and free vibration analysis. *Computers and Concrete* 25(1):37
- [39] Bourada F, Bousahla AA, Bourada M, Azzaz A, Zinata A, Tounsi A (2019) Dynamic investigation of porous functionally graded beam using a sinusoidal shear deformation theory. *Wind and Structures* 28(1):19-30
- [40] Khiloun M, Bousahla AA, Kaci A, Bessaim A, Tounsi A, Mahmoud SR. (2019) Analytical modeling of bending and vibration of thick advanced composite plates using a four-variable quasi 3D HSDT. *Engineering with Computers* 1-5
- [41] Bousahla AA, Bourada F, Mahmoud SR, Tounsi A, Algarni A, Bedia EA, Tounsi A (2020) Buckling and dynamic behavior of the simply supported CNT-RC beams using an integral-first shear deformation theory. *Computers and Concrete* 25(2):155
- [42] Boussoula A, Boucham B, Bourada M, Bourada F, Tounsi A, Bousahla AA, Tounsi A (2020) A simple nth-order shear deformation theory for thermomechanical bending analysis of different configurations of FG sandwich plates. *Smart Structures and Systems* 25(2):197
- [43] Paul A, Das D (2016) Free vibration analysis of pre-stressed FGM Timoshenko beams under large transverse deflection by a variational method. *Engineering Science and Technology, an International Journal* 19:1003–1017
- [44] Wang X, Li Shirong (2016) Free vibration analysis of functionally graded material beams based on Levinson beam theory. *Applied Mathematics and Mechanics* 37: 861–878
- [45] Kahya V, Turan M (2017) Finite element model for vibration and buckling of functionally graded beams based on the first-order shear deformation theory. *Composites Part B* 109: 108-115

- [46] Nguyen DK, Nguyen QH, Tran TT, Bui VT (2017) Vibration of bi-dimensional functionally graded Timoshenko beams excited by a moving load. *Acta Mechanica* 228:141–155
- [47] Deng H, Chen KD, Cheng W, Zhao SG (2017) Vibration and buckling analysis of double-functionally graded Timoshenko beam system on Winkler-Pasternak elastic foundation. *Composite Structures* 160:152–168
- [48] Celebi K, Yarimpabuc D, Tutuncu N (2018) Free vibration analysis of functionally graded beams using complementary functions method. *Archive of Applied Mechanics* 88:729–739
- [49] Sinir S, Çevik M, Sinir BG (2018) Nonlinear free and forced vibration analyses of axially functionally graded Euler-Bernoulli beams with non-uniform cross-section. *Composites Part B: Engineering* 148:123-131
- [50] Banerjee JR, Ananthapuvirajah A (2018) Free vibration of functionally graded beams and frameworks using the dynamic stiffness method. *Journal of Sound and Vibration* 422:34-47
- [51] Karamanli A (2018) Free vibration analysis of two directional functionally graded beams using a third order shear deformation theory. *Composite Structures* 189:127–136
- [52] Fazzolari FA (2018) Generalized exponential, polynomial and trigonometric theories for vibration and stability analysis of porous FG sandwich beams resting on elastic foundations. *Composites Part B: Engineering* 136:254-271
- [53] Cao D, Gao Y (2019) Free vibration of non-uniform axially functionally graded beams using the asymptotic development method. *Applied Mathematics and Mechanics* 40:85-96
- [54] Wattanasakulpong N, Ungbhakorn V (2014) Linear and nonlinear vibration analysis of elastically restrained ends FGM beams with porosities. *Aerospace Science and Technology* 32(1): 111-120
- [55] Shahsavari D, Shahsavari M, Li L, Karami B (2018) A novel quasi-3D hyperbolic theory for free vibration of FG plates with porosities resting on Winkler/Pasternak/Kerr foundation. *Aerospace Science and Technology* 72:134-149
- [56] Malikan M, Tornabene F, Dimitri R (2018) Nonlocal three-dimensional theory of elasticity for buckling behavior of functionally graded porous nanoplates using volume integrals. *Materials Research Express* 5(9):095006



- [57] Senthilnathan NR, Lim SP, Lee KH, Chow ST (1987) Buckling of shear-deformable plates. AIAA journal 25(9):1268-71
- [58] Bekhadda A, Bensaid I, Cheikh A, Kerboua B (2019) Static buckling and vibration analysis of continuously graded ceramic-metal beams using a refined higher order shear deformation theory. Multidiscipline Modeling in Materials and Structures
- [59] Daikh AA (2019) Temperature dependent vibration analysis of functionally graded sandwich plates resting on Winkler/Pasternak/Kerr foundation. Materials Research Express 6(6):065702
- [60] Jena SK, Chakraverty S, Malikan M (2020) Implementation of Non-Probabilistic Methods for Stability Analysis of Nonlocal Beam with Structural Uncertainties. Engineering with Computers doi.org/10.1007/s00366-020-00987-z
- [61] Jena SK, Chakraverty S, Malikan M, Tornabene F (2019) Stability Analysis of Single-Walled Carbon Nanotubes Embedded in Winkler Foundation Placed in a Thermal Environment Considering the Surface Effect Using a New Refined Beam Theory. Mechanics Based Design of Structures and Machines, An International Journal doi.org/10.1080/15397734.2019.1698437
- [62] Jena SK, Chakraverty S, Malikan M (2019) Vibration and Buckling Characteristics of Nonlocal Beam Placed in a Magnetic Field Embedded in Winkler-Pasternak Elastic Foundation Using a New Refined Beam Theory: An Analytical approach. The European Physical Journal Plus 135: 1-18
- [63] Jena SK, Chakraverty S, Tornabene F (2019) Buckling Behavior of Nanobeam Placed in an Electro-Magnetic Field Using Shifted Chebyshev polynomials Based Rayleigh-Ritz Method. Nanomaterials 9(9): 1326
- [64] Malikan M, Eremeyev VA (2020) Post-critical buckling of truncated conical carbon nanotubes considering surface effects embedding in a nonlinear Winkler substrate using the Rayleigh-Ritz method. Materials Research Express 7:025005
- [65] Jena SK, Chakraverty S, Jena RM (2019) Propagation of Uncertainty in Free Vibration of Euler-Bernoulli Nanobeam. Journal of the Brazilian Society of Mechanical Sciences and Engineering 41(10): 436

[66] Yang J, Shen HS (2002) Vibration characteristics and transient response of shear-deformable functionally graded plates in thermal environments. *Journal of Sound and vibration* 255(3):579-602

[67] Reddy JN, Chin CD (1998) Thermomechanical analysis of functionally graded cylinders and plates. *Journal of thermal Stresses* 21(6):593-626

[68] Ćwik M (2010) Fundamental frequency analysis of functionally graded beams by using different higher-order beam theories. *Nuclear Engineering and Design* 240(4): 697-705