



## STOCHASTIC MODEL OF THE PROCESS OF STARTING COMBUSTION ENGINES AND PRACTICAL APPLICATION OF THE PROCESS

Jerzy Girtler

Gdansk University of Technology  
Faculty of Ocean Engineering & Ship Technology  
Department of Ship Power Plants  
tel. (+48 58) 347-24-30; fax (+48 58) 347-19-81  
e-mail: jgirtl@pg.gda.pl

### Abstract

The paper presents a proposal of a model of diesel engine (or gas turbine engine) starting process as semi-Markov process which is discreet in states and continuous during operation. States of the process are the following: cold engine state ( $s_1$ ), warm engine state ( $s_2$ ) and hot engine state ( $s_3$ ). Idea of using the model for determining a quantity of harmful substances emitted in exhaust gases during starting of engine, has also been proposed herein. Moreover, the paper provides a possibility of considering in researches on the quantity of harmful substances contained in exhaust gases, a mass of harmful substances as a random variable. For the considerations it has been accepted that statistics of the random variable has got asymptotically normal distribution. The presented stochastic model of self-ignition engines starting process enables deriving the limiting distribution of the process, being the probabilities of occurring the mentioned states ( $s_1$ ), ( $s_2$ ) and ( $s_3$ ) one by one. The distribution is indispensable to determine the expected value of the mass of harmful substances emitted in time of successive re-starts of engine performed during long operation. The second approach to estimation of the mentioned mass considered as a random variable enables estimating its expected value in time of long-term work of engines till the first failure or in the period between two successive preventive maintenances. Estimation of the expected value of the masses of harmful substances emitted during long operation of engine, can be made by applying point or interval estimation. The paper proposes the interval estimation because it makes possible to assess accuracy of the estimation. In this case the mentioned value is determined in the form of interval with random edges (limits), which comprises unknown value of the mass of harmful substances emitted by engine, at the probability called confidence level.

**Keywords:** diesel engine, semi-Markov process, toxic substance

### 1. Introduction

Considerations in the phases of combustion engines (diesel engines or gas turbine engines) designing and operating, include not only parameters characterizing the energy conversion, like [2, 14, 15, 17, 18]: general ability of engine, heat emission rate, heat usage rate, heat evolution rate, pressure escalation rate, etc. Emission (Fig. 1.) content should also be submitted to analysis for such toxic compounds as carbon monoxide (CO), hydrocarbons ( $C_nH_m$ ), nitric oxide ( $NO_x$ ), particulate solid (PM- Particulate Matte) and sulfur compounds ( $SiO_2$ ,  $SiO_3$ ,  $H_2SO_3$ ,  $H_2SO_4$ ), aldehydes and others [1, 12]. From researches on fuel combustion processes results that physical (not chemical) processes have great influence on the quantity of emission of particular toxic compounds included in exhaust gases. The other issue from the researches is that their emission is closely connected with each other and possibility of reduction of one of them can cause increase of emission of another one. Therefore, any action to reduce the content of toxic compounds in exhaust gases must be followed by a compromise ensuring minimization of harmful impact of toxic exhaust compounds on natural environment.

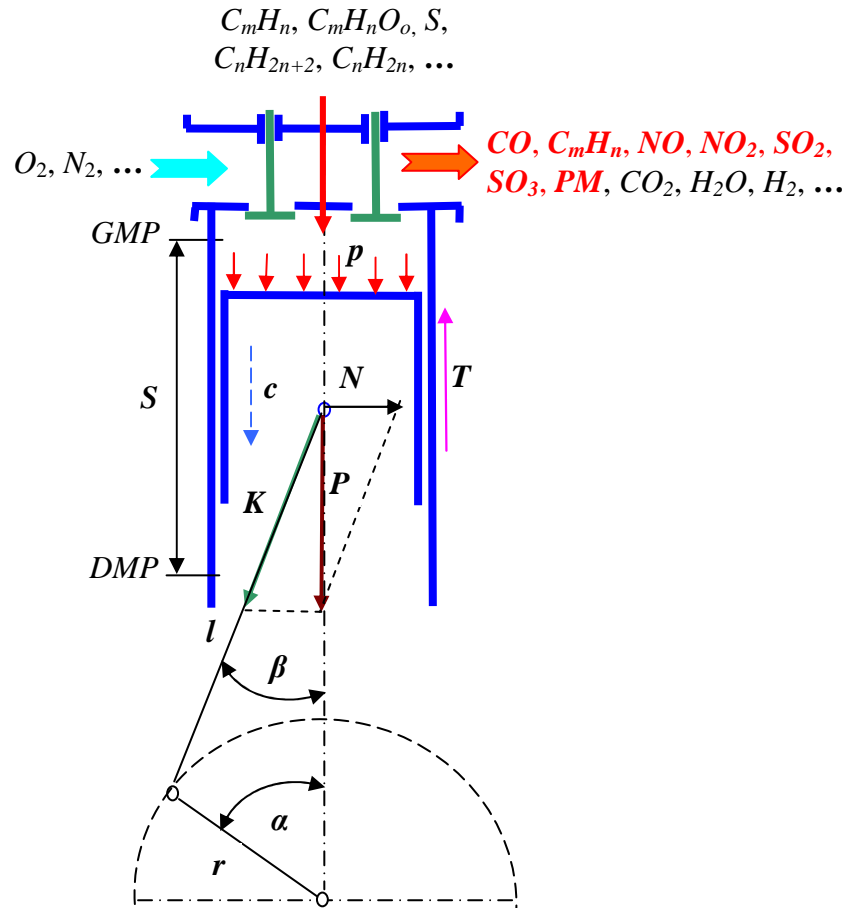


Fig. 1. Toxic compounds as carbon monoxide ( $CO$ ), hydrocarbons ( $C_n H_m$ ), nitric oxide ( $NO_x$ ), particulate solid ( $PM$ -Particulate Matte) and sulfur compounds ( $SiO_2$ ,  $SiO_3$ ):  $GMP$  – top dead centre,  $DMP$  – bottom dead centre,  $p$  – exhaust gas pressure,  $S$  – piston stroke,  $c$  – piston speed,  $N$  – piston-side-thrust force,  $T$  – friction-force,  $P$  – piston force,  $K$  – connecting-rod force,  $l$  – connecting-rod length,  $r$  – crank radius,  $\alpha$  – crank angle,  $\beta$  – connecting-rod deflexion angle

Emission of the toxic compounds depends among others on engine thermal state, especially while starting engine. Thus, this paper provides a proposal of an original method to determine the mass of toxic compounds emitted by self-ignition or spark-ignition engine during starting. The method considers the stochastic model of starting engines of this kind. It has been shown that the model can be presented in the form of semi-Markov process.

Professional literature proves that the most toxic compounds are formed in exhaust gases during so called “cold engine starting”, so when the engine is started after not sufficient pre-warming phase [1, 9, 11, 19]. From this reason there is a need to create a model of engine starting process considering at least three states of engine: cold, warm (up-warm) and hot.

## 2. Model of self-ignition engine starting process

Considering the process of starting a combustion engine (diesel engine or gas turbine engine), at least three thermal states of it, which exist directly before starting, can be distinguished, i.e. *cold state* ( $s_1$ ), *warm state* ( $s_2$ ), and *hot state* ( $s_3$ ). The states may be values of the process  $\{U(t): t \in T\}$  being a real model of the engine starting process. The model can be presented in the form of semi-Markov process having the set of states [5]:

$$S = \{s_1, s_2, s_3\} \quad (1)$$



with the following interpretation of the states:

- $s_1$  cold state which enables starting the engine in ambient conditions (conditions of ship power plant) with typical low temperatures ( $T$ ) not higher than 290 K;
- $s_2$  warm state which enables starting the engine in conditions of pre-warming ( $T > 300$  K) performed on it in state  $s_1$  before starting;
- $s_3$  hot state which enables starting the engine in its operating (working) conditions following from the need of stopping the engine work under even large load and then re-starting.

Thus, the process is a three-state one with continuous realizations (time-continuous process). It is a semi-Markov process [4, 5, 6, 7] and, as a model of changes of the states of combustion engine starting, is the simplest model which can be of practical significance.

In this relation the set of states of starting self-ignition engines  $S = \{s_1, s_2, s_3\}$  can be considered as a set of values of the stochastic process  $\{U(t): t \in T\}$  with constant intervals and right-side continuous realizations.

Initial distribution of the process  $\{U(t): t \in T\}$  of any combustion engine is defined by the formula [5]:

$$P_i = P\{U(0) = s_i\} = \begin{cases} 1 & \text{dla } i = 1 \\ 0 & \text{dla } i = 2, 3 \end{cases}. \quad (2)$$

Functional matrix of the process is as follows:

$$\mathbf{Q}(t) = \begin{bmatrix} 0 & Q_{12}(t) & Q_{13}(t) \\ Q_{21}(t) & 0 & Q_{23}(t) \\ Q_{31}(t) & Q_{32}(t) & 0 \end{bmatrix}. \quad (3)$$

Thus, for the presented process  $\{U(t): t \in T\}$  with functional matrix expressed by the formula (3), the following limiting distribution can be determined:

$$P_1 = \frac{\pi_1 E(T_1)}{H}, \quad P_2 = \frac{\pi_2 E(T_2)}{H}, \quad P_3 = \frac{\pi_3 E(T_3)}{H} \quad (4)$$

at:

$$\pi_1 = \frac{p_{31} + p_{12} p_{32}}{2 + p_{12} p_{23} p_{31} + p_{13} p_{21} p_{32}}, \quad \pi_2 = \frac{p_{32} + p_{12} p_{31}}{2 + p_{12} p_{23} p_{31} + p_{13} p_{21} p_{32}},$$

$$\pi_3 = \frac{1 - p_{12} p_{21}}{2 + p_{12} p_{23} p_{31} + p_{13} p_{21} p_{32}},$$

$$H = \pi_1 E(T_1) + \pi_2 E(T_2) + \pi_3 E(T_3),$$

where:

$P_1, P_2, P_3$  – probability that combustion engine is started from the states accordingly:  $s_1, s_2, s_3$ ,

$\pi_j$  – limiting probability of the embedded Markov chain of the process  $\{U(t): t \in T\}$ , describing the possibility of occurring the state  $s_j, j = 1, 2, 3$ ,

$p_{ij}$  – probability of the process  $\{U(t): t \in T\}$  transition from the state  $s_i$  to the state  $s_j$ ;

$E(T_j)$  – expected value of duration of the state  $s_j, (j = 1, 2, 3)$ .

The presented states of starting any combustion engine are connected with particular thermal states of the engine. They reflect states existing in practice. Therefore, the proposed model can be employed for determining the mass of toxic compounds.

### 3. Determination of toxic compounds mass during the phase of engine starting.

Analysis of research results on the combustion process run, shows that during combustion there are different conditions for toxic compounds to form in emission. The most significant of them are: carbon monoxide (CO), hydrocarbons ( $C_nH_m$ ), nitric oxide ( $NO_x$ ), particulate solid and substances in very little amounts (forming low concentrations) like sulfur compounds ( $SiO_2$ ,  $SiO_3$ ,  $H_2SO_3$  and  $H_2SO_4$ ), aldehydes and others [1, 12, 14, 18]. In practice there is a need to control emission of the mentioned substances.

Emission of toxic substances can be determined from the following formula [1]:

$$e_k = \frac{v_{mix} \rho_k K_H c_k}{s} 10^{-6} \quad (5)$$

at  $k = 1, 2, \dots, n$  – type (number) of the given toxic substance,

where:

- $e_k$  – mass of toxic substance [g/km],
- $v_{mix}$  – volume of dilute emission in normal conditions [ $dm^3/test$ ],
- $\rho_k$  – density of toxic substance in normal conditions [ $g/dm^3$ ],
- $K_M$  – correction rate of humidity of nitric oxide mass,
- $c_k$  – concentration of the substance toxic for surroundings [ppm],
- $s$  – road traveled by a transport mean (car, sea-going ship) during testing [km].

Emission  $e_k$  ( $k = 1, 2, \dots, n$ ) differs depending on whether the starting of engine runs from the cold state ( $s_1$ ), warm state ( $s_2$ ) or hot state ( $s_3$ ). During test performance, on the road ( $s$ ) traveled by the given transport mean (car, sea-going ship), engine can be started several times from its different states mentioned above. The emission will be also different for the engine depending on the technical state of its fuel system and the fuel quality. Ambient conditions in which the engine is started are important, as well. Therefore, the emission value of toxic substances, determined from the formula (5) may be accepted as emission realization considered as a random variable. Hence, taking into account the dependence (4), the mass of toxic substances can be expressed by the following formula:

$$E(E_k) = \frac{(p_{31} + p_{12}p_{32})E(T_1)}{M} e_{1k} + \frac{(p_{32} + p_{12}p_{31})E(T_2)}{M} e_{2k} + \frac{(1 - p_{12}p_{21})E(T_3)}{M} e_{3k} \quad (6)$$

at:

$$M = E(T_1) + p_{12}E(T_2) + (1 - p_{12}p_{23})E(T_3),$$

where:

- $e_k$  – mass of the substance toxic for the natural environment ( $k = 1, 2, \dots, n$ ),
- $p_{ij}$  – probability of transition of the engine starting process  $\{U(t): t \in T\}$  from the state  $s_i$  to the state  $s_j$ ,  $i \neq j$ ;  $i, j = 1, 2, 3$ ,

$E(T_j)$  – expected value of state  $s_j$  ( $j = 1, 2, 3$ ) duration.

The formula (6) follows from consideration of all dependences provided in the formula (4) which determines the probabilities  $P_1, P_2$  i  $P_3$ .

The mentioned toxic substances contained in emission like: carbon monoxide (CO), nitric oxides ( $\text{NO}_x$ ), the most of all NO, hydrocarbons ( $\text{C}_n\text{H}_m$ ), particulate solid (PM) and sulfur compounds, as sulfur dioxide ( $\text{SO}_2$ ), sulfur trioxide ( $\text{SO}_3$ ), sulfurous acid ( $\text{H}_2\text{SO}_3$ ), sulfuric acid ( $\text{H}_2\text{SO}_4$ ), can be and should be considered as random variables. That is because these characteristics are such variables which, in the result of successive measures, take different numerical values with determined probability. So, the mass  $e_k$  of the mentioned toxic substances in emission, calculated from the formula (5), can be considered as realization of random variable  $E_k$ , where  $k = \text{CO}, \text{NO}, \text{C}_n\text{H}_m, \text{PM}, \text{SO}_2, \text{SO}_3, \text{H}_2\text{SO}_3, \text{H}_2\text{SO}_4$ . That means that determined probability is assigned to each possible value of any random variable  $E_k$ . This fact can be described in the following form [3, 13]:

$$P(E_k = e_{ki}) = p_{ki} \quad (i = 1, 2, \dots, n). \quad (7)$$

The formula shows that probability  $p_{ki}$  is a function of the values which can be taken by a random variable  $E_k$ . So, for any random variable  $E_k$  the following description can be made:

$$p_{ki} = f(e_{ki}). \quad (8)$$

The characteristic of the function is that the sum of probabilities determined by the dependence (8) is equal to 1, what can be described as follows:

$$\sum_{i=1}^n p(e_{ki}) = 1. \quad (9)$$

Analyzing the toxic substances contained in the emission as random variables  $E_k$  and making the successive measures of their mass values, the average mass value (arithmetic average) can be determined from the formula [3, 8, 10, 16]:

$$\bar{e}_k = \frac{1}{n} \sum_{i=1}^n e_{ki}, \quad (10)$$

where:

$e_{ki}$  – value of the analyzed characteristic (random variable)  $E_k$ .

Average value  $\bar{e}_k$ , determined from the formula (10) is the observed value of statistics  $\bar{E}_k$ . The statistics is a random variable [3]

$$\bar{E}_{kn} = \frac{1}{n} \sum_{i=1}^n E_{ki}, \quad (11)$$

where  $E_{ki}$  – random variable with the same (arbitrary) distribution of a common expected value  $E(E_{ki}) = m_{1k}$  and variation  $D^2(E_{ki}) = \sigma_k^2 \neq 0$ .

Thus, random variable  $\bar{E}_k$  is an arithmetic average with  $n$  independent random variables  $E_{ki}$  of identical distribution. Expected value and variation of random variable  $\bar{E}_k$  are defined in the form of dependences [3, 8]:



$$E(\bar{E}_{kn}) = E(E_{ki}) = m_{1k}, \quad D^2(E_{kn}) = \frac{1}{n} D^2(E_{ki}) = \frac{\delta_k^2}{n}. \quad (12)$$

From the Lindeberg-Levy theorem follows [3] that the random variable  $\bar{E}_k$  (statistics) has got asymptotically normal distribution  $N(m_{1k}, \frac{\sigma_k}{\sqrt{n}})$  regardless of the character of the random variable  $E_k$ . That means that the arithmetic average with  $n$  independent random variables  $E_{ki}$ , arbitrary but identical distribution, common expected value  $E(E_{ki}) = m_{1k}$  and variation  $D^2(E_{ki}) = \sigma_k^2$ , has got asymptotically normal distribution  $N(m_{1k}, \frac{\sigma_k}{\sqrt{n}})$ .

Analysis of toxic substances contained in emission according to the presented proposal is interesting in the aspect that convergence of the statistics  $\bar{E}_k$  distribution to the normal distribution  $N(m_{1k}, \frac{\sigma_k}{\sqrt{n}})$  is so quick that it can be used for all  $n \geq 4$ , so almost always.

When the value  $\sigma$  is known and the distribution  $N(m_{1k}, \frac{\sigma_k}{\sqrt{n}})$  of the statistics  $\bar{E}_k$  is considered, it is possible to determine a confidence interval for unknown expected value  $m_{k1} = E(E_k)$  from the formula [3, 8, 10]:

$$P\left\{\bar{e}_k - y_\alpha \frac{\sigma_k}{\sqrt{n}} \leq E(E_k) \leq \bar{e}_k + y_\alpha \frac{\sigma_k}{\sqrt{n}}\right\} = \beta, \quad (13)$$

where:

$\beta$  – confidence level,

$y_\alpha$  – standardized variable of normal distribution, meeting the confidence level  $\beta = 1 - \alpha$  ( $\alpha$  – significance level).

In research practice the value  $\sigma$  is, as a rule, unknown and for its evaluation the following formula [3, 16] is applied:

$$s_k = \sqrt{\frac{1}{n-1} \sum_{i=1}^n (e_{ki} - \bar{e}_k)^2}. \quad (14)$$

Because the statistics  $\bar{E}_k$  has always got asymptotically normal distribution  $N(m_{1k}, \frac{\sigma_k}{\sqrt{n}})$ , and its convergence to normal distribution  $N(m_1, \sigma)$  is very quick, so practically it can be accepted that the analyzed characteristic  $E_k$  of emission, being a content of  $k$  toxic substance, has a normal distribution  $N(m_{1k}, \sigma_k)$ . Hereby, it has to be pointed out that acceptance of the assumption that the mentioned characteristic  $E_k$  has a normal distribution  $N(m_{1k}, \sigma_k)$  is not a limitation in the research practice because the statistics  $\bar{E}_k$  has always got asymptotically normal distribution  $N(m_{1k}, \frac{\sigma_k}{\sqrt{n}})$ . Additionally, convergence of this distribution to normal distribution is very quick [3]. Thus, the random variable  $\frac{\bar{E}_k - E(E_k)}{s_k} \sqrt{n-1}$  has distribution  $t$ -Student with  $k = n - 1$  degrees of freedom.

That means that confidence interval for unknown expected value  $E(E_k)$  of the random variable  $E_k$  can be determined from the formula [3, 8]:

$$P\left\{\bar{e}_k - t_{\alpha, n-1} \frac{s_k}{\sqrt{n-1}} \leq E(E_k) \leq \bar{e}_k + t_{\alpha, n-1} \frac{s_k}{\sqrt{n-1}}\right\} = \beta. \quad (15)$$

#### 4. Final conclusions

Emission of toxic substances, occurring during operation of combustion engines, depends among others on their thermal states. The highest emission of toxic substances is recorded in time of starting the engines. Starting an engine from its cold state, so the state having an ambient temperature, is particularly unfavourable. Engines in warm state and especially hot state generate smaller amount of toxic substances. Therefore, it is significant to know the probabilities of starting engines from their particular states. For determining the probabilities it has been proposed herein the semi-Markov model of the engine starting three-state process with the following interpretation of the states: cold state ( $s_1$ ), warm state ( $s_2$ ), hot state ( $s_3$ ). It has been shown usability of the model to determine the mass of toxic substances emitted to the surroundings during starting engines. There has also been presented another approach to testing the content of toxic substances in exhaust gases. It consists in considering the mass of any toxic substance as a characteristic of emission, being a random variable. The paper has also shown usability of the Lindeberg-Levy's theorem from which follows that the statistics occurred from test results on determined mass of emitted toxic substance is a random variable with asymptotically normal distribution regardless of the character of the random variable which is the tested mass of the mentioned substance. This enables applying the interval estimation for assessing unknown expected value of a random variable which can be a mass of any toxic substance existing in the exhaust gases.

#### References

- [1] Bielaczyc, P., Merkişz, J., Pielecha, J., *Stan cieplny silnika spalinowego a emisja związków szkodliwych*, Wydawnictwo Politechniki Poznańskiej, Poznań 2001.
- [2] Brun, R., *Szybkobieżne silniki wysokoprężne. WKiŁ, Warszawa 1973. Dane o oryginale: Science et Technique du Moteur Diesel Industriel et de Transport*, Copyright by Societe des Editions Technip et Institut Francais du Petrole, Paris 1967.
- [3] Firkowicz, S., *Statystyczna ocena jakości i niezawodności lamp elektronowych*, WNT, Warszawa 1963.
- [4] Girtler, J., *Stochastic model of the process of starting piston combustion engines and the practical use of the process*, Journal of KONES Powertrain and Transport. Vol 13, No 2, Warsaw 2006, pp.73-79.
- [5] Girtler, J., *Semi-Markovian models of the process of technical state changes of technical objects*, Polish Maritime Research No 4/2004. Gdansk.
- [6] Girtler, J., *Physical aspects of application and usefulness of semi-Markovian processes for modeling the processes occurring in operational phase of technical objects*. Polish Maritime Research No 3/2004. Gdansk.
- [7] Grabski, F., *Teoria semi-markowskich procesów eksploatacji obiektów technicznych*, Zeszyty Naukowe AMW, nr 75 A, Gdynia 1982.
- [8] Greń, J., *Modele i zadania statystyki matematycznej*, PWN, Warszawa 1968.
- [9] Höglund, P.G., Ydstedt, A., *Reduced Air Pollution and Fuel Consumption with Preheated Car Engines*, Urban Transport and the Environment for the 21<sup>st</sup> Century, International Conference, Lisbon 1998.
- [10] Krzysztofiak, M., Urbanek, D., *Metody statystyczne*, PWN, Warszawa 1979.

- [11] Larson, R.E., *Vehicle Emission Characteristics under Cold Ambient Conditions*, SAE Technical Paper 890021.
- [12] Lotko, W., *Zasilanie silników spalinowych paliwami alternatywnym*, ITE, Radom 1995.
- [13] Pawłow, B., W., *Badania diagnostyczne w technice*, WNT, Warszawa 1967.
- [14] Piotrowski, I., *Okrętowe silniki spalinowe*, WM, Gdańsk 1971.
- [15] Piotrowski, I., Witkowski, K., *Eksploatacja okrętowych silników spalinowych*, AM, Gdynia 2002.
- [16] Volk, W., *Statystyka stosowana dla inżynierów*, WNT, Warszawa 1965.
- [17] Wajand, J.A., *Silniki o zapłonie samoczynnym*, WNT, Warszawa 1988.
- [18] Zabłocki, M., *Wtrysk i spalanie w silnikach wysokoprężnych*, WKiŁ, Warszawa 1976.
- [19] Swedish Environmental Protection Agency and Motortestcenter of the Swedish Motor Vehicle Inspection Company. *Cold Climate Emissions* 1993.