

# Change in Heavy Metals Concentrations in Sediments Deposited in Retention Tanks in a Stream after a Flood

Nicole Nawrot\*, Karolina Matej-Łukowicz, Ewa Wojciechowska

Faculty of Civil and Environmental Engineering, Gdansk University of Technology,  
Gdańsk, Poland

*Received: 12 October 2017*

*Accepted: 2 January 2018*

## Abstract

Our paper presents the results of heavy metal (HM) (Zn, Cu, Pb, Cd) content in bottom sediments from retention tanks along Oliwa Stream in Gdańsk, Poland, before a flood (BF) and after a flood (AF) 14-15 July 2016. The flood had a huge impact on the quality of bottom sediments and their displacement. The concentrations of HM differed significantly for research series conducted 3 months BF and 8 months AF. The concentration of Cu increased from 3.5 mg/kg to 88.8 mg/kg BF and from 12.1 mg/kg to 1,114.3 mg/kg AF, Zn from 27.4 mg/kg to 129.9 mg/kg BF; and 42.3 mg/kg to 244.8 mg/kg AF, Cd from 0.04 mg/kg to 0.47 mg/kg BF, and 0.08 mg/kg to 0.47 mg/kg AF. Also, the migration of some metals, mostly Cu to retention tanks located downstream, was observed, resulting from the washing away of sediments in the upper part of the stream. Since the stream inflows to the Gulf of Gdansk, urban flooding created a risk of migration of contaminants to the Baltic Sea.

**Keywords:** contamination; heavy metals; sediments; urban flood; copper

## Introduction

The source of stormwater pollution in an urban area is primarily motorization, atmospheric dust, fuel combustion products, and – to a lesser extent – fertilizers and plant protection products in green areas [1]. Stormwater and direct surface runoff are a threat to the quality of watercourses, retention tanks, and sediments deposited therein. Also, leaching of some compounds from roofing material may occur [2]. The previous runoff studies in the region of Gdansk, including analytical

determination of inorganic and organic pollutants, proved that roof runoff water is contaminated with heavy metals and pesticides [3]. Pollutants are transported along with the surface runoff to the receivers, which are mostly streams and rivers flowing through cities. In many cities, including Gdansk, they are also the receivers of storm water drainage outlets. Although the major pollutant discharged with stormwater runoff is suspended solids (TSS), the runoff also contains other contaminants, like heavy metals (HM), adsorbed on solid particles. Part of the pollutants carried by streams is deposited in the sediments accumulating in retention tanks [4].

There has been a significant increase in the flood risk in Poland over the last decades. Its cause is strong

\*e-mail: [nicole.nawrot@pg.edu.pl](mailto:nicole.nawrot@pg.edu.pl)

anthropopressure manifesting itself in systematic land transformation. In Poland there is a decrease in the share of summer precipitation in annual rainfall, though summer precipitation is characterized by increased intensity and duration compared to similar precipitation in previous decades [5]. Surface sealing causes unfavorable change in the structure of precipitation outflow from the catchment area, and urbanization causes a reduction of underground outflow and an increase of surface runoff [6]. Impervious surfaces in high-density urban areas cover more than 80% of the surfaces [7]. The effect of precipitation on surface runoff is noticeable much faster in the case of urban catchment areas than the natural area. The consequence of urbanization is the reduction of evaporation, infiltration, retention, and transpiration. Natural water circulation is disturbed [8-9]. A flood wave flowing through a retention tank located on a stream introduces a considerable amount of nutrient, mineral, and organic substances, as well as various types of waste (including municipal waste). It causes increased pollution of the waters and bottom sediments of the tanks. The height of the precipitation that led to the flood in Gdansk on 14-15 July 2017 was 160 mm, and 170 mm locally in Gdansk Oliwa district. Average monthly rainfall in July in Gdansk for the period 1981 to 2010 was 60 mm, according to the Institute of Meteorology and Water Management (IMGW). The occurrence of precipitation of such intensity caused significant material damage. Flooding extended to the city zoo, roads, residential cellars, and underground garages, and resulted in two deaths. In addition to the losses at the time of the flood, environmental losses and the threat of migration of contaminants are also of importance. The contamination caused by the flooding event in Oliwa Stream was discussed by Matej-Lukowicz and Wojciechowska [10]. However, the changes in the quality of bottom sediments in retention tanks along the stream were also observed as

a long-term effect of the flood. The aim of this study is to present the concentrations of heavy metals: zinc (Zn), lead (Pb), copper (Cu), and cadmium (Cd) in bottom sediments from 5 retention tanks in Oliwa before the flood (BF) and 8 months after the flood (AF, at a time when the reconstruction of basic parameters of the watercourse was accomplished).

## Experimental

### Research Sites

Oliwa Stream is 9.6 km long and is the second longest stream in Gdansk, with the largest average flow rate  $Q = 158$  l/s. Its source is near the S6 express road. The total catchment area is approximately 3,050 ha. The stream inflows directly to the Gulf of Gdansk in Jelitkowo district. In the upper part, the stream flows through the forest area, called the Valley of Joy. Next in the middle part little by little it becomes surrounded by urbanized areas until finally in the lower part the riverbed runs through densely urbanized residential areas, close to traffic arteries. The most important inflow of Oliwa Stream is Rynarzewski Stream, which flows through the city zoological garden. Throughout its length, Oliwa is a receiver for the stormwater drainage system. There are 13 retention tanks on Oliwa, with a total capacity of 70,000 m<sup>3</sup> and total area about 13.5 ha. Fig. 1 presents locations and basic information on 5 retention tanks analyzed within this study.

Figs 2 and 3 show Oliwa Stream during the flood. Due to very high rainfall intensity and excessive runoff, some of the retention tanks were damaged and water flooded nearby areas. As a direct effect of the flooding event, a significant increase of pollutant concentrations was observed, and  $N_{NO_2^-}$  increased from

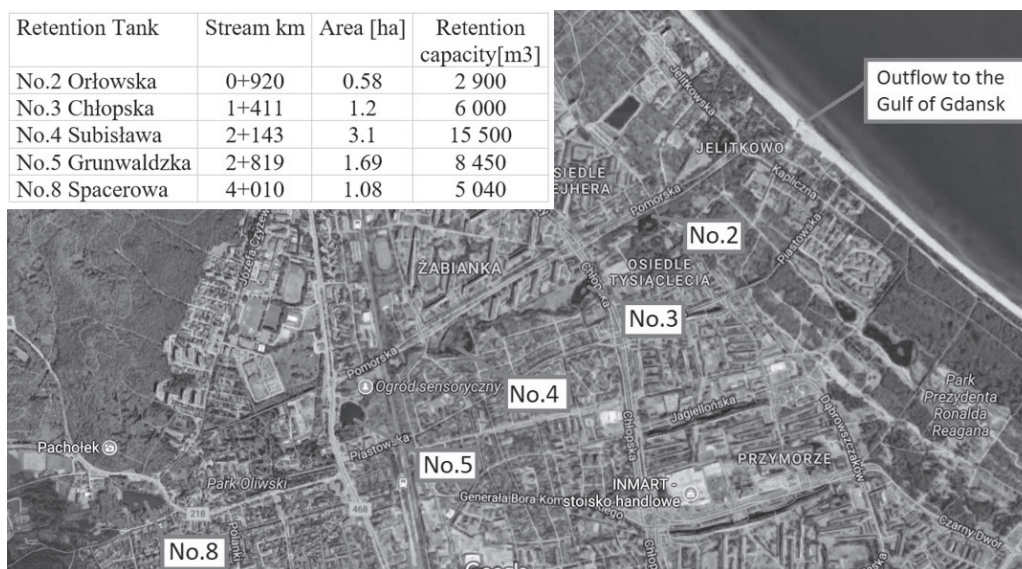


Fig. 1. Locations and retention capacities of analyzed retention tanks on Oliwa Stream.



Table 2. Classification of sediments based on HM concentration (mg/kg d.m.) according to SQG [13].

Metal	Sediment Quality Guidelines	
	TEC*	PEC*
Zinc (Zn)	121.0	459.0
Lead (Pb)	35.8	128.0
Copper (Cu)	31.6	149.0
Cadmium (Cd)	0.99	4.98

Explanations: \*Consensus-based TEC and PEC – Criteria provided by MacDonald et al. (rok) based on comparisons of each type of SQG (sediment toxicity is observed only rarely below TEC and frequently observed above the PEC)

case of cadmium, analysis was carried out using an ELAN 9000 Perkin Elmer inductively coupled plasma mass spectrometer (ICP-MS).

### Evaluating Sediment Pollution with HM

In order to assess contamination of sediments with HM the measurement results were compared to the LAWA classification [12], which divides the TSS, water, and bottom sediments into 7 classes, with different HM concentrations. The boundary values for each class are shown in Table 1. Comparative value is the average content of HM expressed in mg/kg.

The results were also compared to the sediment quality guidelines (SQG), which determine two pollution levels: threshold effects concentration (TEC) and probable effects concentration (PEC) [13]. The TEC indicator specifies a threshold that defines the absence of sediment toxicity for a freshwater ecosystem, while the PEC indicator provides an accurate basis for predicting sediment toxicity. The values of TEC and PEC are shown in Table 2.

## Results and Discussion

The results of HM concentrations in the sediments from retention tanks on Oliwa Stream are shown at Figs 4-6. The HM concentrations differed significantly between research series conducted BF and AF. There were no obvious trends in the distribution of HM along Oliwa Stream, but for most of the observed results the HM seemed to be moved to the tanks located downstream as a result of the flood.

Concentrations of Zn (Fig. 4) before the flood incident were between 27.4 mg/kg d.m. in No. 3 tank (inflow) to 129.9 mg/kg d.m. in No. 8 tank (outflow); compared to the LAWA classification this means that sediments were not contaminated. In relation to SQG, sediments were not toxic for aquatic organisms. The increase in

Zn content in bottom sediments AF occurred for tank Nos. 2, 4, and 5 at the inflow and tank Nos. 3, 4, and 5 in the middle part and at the outflow. The average content of Zn in sediments from the retention tanks is approximately 125 mg/kg d.m. In two cases – tank Nos. 4 (point S) and 5 (point B) – the boundary value of the II class of purity according to LAWA (more than 200 mg/kg d.m.) was exceeded. The increase in Zn content AF could be caused by intensive surface runoff (especially from streets with intensive traffic), which was stopped and deposited in the bottom sediments after the flood wave. Similar results were obtained for Pb (Fig. 5). The content range for Pb BF was between 8.5 mg/kg d.m. to 50.2 mg/kg d.m. – which refers to uncontaminated sediments according to LAWA classification. AF the Pb content rose at the same points as Zn. This supports the thesis that in contaminated sediments Zn occurs often together with Pb [14]. At inlet to tank No. 8 the Pb content was 160.6 mg/kg d.m., exceeding the second class of purity (LAWA). Additionally, the limit for PEC was exceeded in this case.

The Cu content (Fig. 5) in bottom sediments in April 2016 was from 3.0 mg/kg d.m. (No. 8 – inflow) to 88.8 mg/kg d.m. (No. 5 – inflow), and only in the latter sampling point was the class II of purity (according to LAWA). After the flood incident the sediment contamination with Cu increased to 29.5 mg/kg d.m. in retention tank No. 5 (inflow), and the remarkable level of 1,114.3 mg/kg d.m. was observed at the inflow to tank No. 2. In this case the PCB indicator was exceeded 7.5 times. Such a significant increase in Cu concentration can be attributed to the intense surface runoff of areas located near the stream, including numerous garden plots (copper is widely used in the production of insecticides and fungicides). In addition, in the Oliwa District many roofs are made of copper. It is worth noting that BF the highest concentrations of Cu were observed in tank No. 5 located in the center of Oliwa District, where copper roofs are present, while AF a record Cu concentration was measured in tank No. 2 located right before the inflow to the Gulf of Gdansk. Also, the Cu concentrations

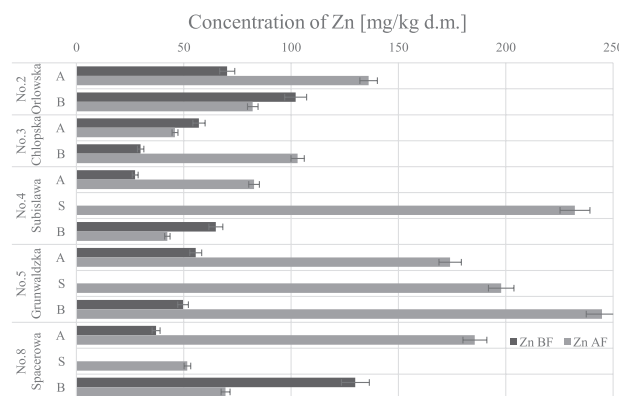


Fig. 4. Average concentrations of Zn in bottom sediments of retention tanks on Oliwa Stream before flood (BF) and after flood (AF).



Oliwa District with numerous copper roofs, while after flood the outstandingly high concentrations of Cu were measured in downstream tank Nos. 3 (B – 64.9 mg/kg) and 2 (A – 1114.3 mg/kg), suggesting that Cu was transported downstream as a result of washing out of the sediments deposited in the middle run of Oliwa Stream by an extremely high flow.

### Acknowledgements

The work was completed under a GRAM grant, awarded in a competitive procedure by the Dean of the Faculty of Civil and Environmental Engineering, Gdansk University of Technology. The grants are funded from science funds as specified in Journal of Laws No. 96, heading 615, as amended.

### References

1. ANGRILLA S., PETIT-BOIXA A., MORALES-PINZÓN T., JOSAC A., RIERADEVALLA J., GABARELLA X. Urban rainwater runoff quantity and quality – A potential endogenous resource in cities?, *Journal of Environmental Management* **189**, 14, **2017**.
2. NAWROT N., WOJCIECHOWSKA E. Assessment of trace metals leaching during rainfall events from building rooftops with different types of coverage – case study. *Journal of Ecological Engineering*, **19** (3), 45, **2018**.
3. POLKOWSKA Ż., GÓRECKI T., NAMIEŚNIK J. Quality of roof runoff waters from an urban region (Gdańsk, Poland). *Chemosphere* **49**, 1275, **2002**.
4. OBARSKA-PEMPKOWIAK H., GAJEWSKA M., WOJCIECHOWSKA E. Application of vertical flow constructed wetlands for highly contaminated wastewater treatment: preliminary results. *Water and Nutrient Management in Natural and Constructed Wetlands* J.Vymazal (Ed), Springer Science+Business Media B.V. chapter **4**, 37, **2010**.
5. KRÓLIKOWSKA J., KRÓLIKOWSKI A. Wody opadowe. Odprowadzanie, zagospodarowanie, podczyszczanie i wykorzystanie, eng. Rainwater. Discharge, management, pre-treatment and use, Seidel-Przywecki, Warszawa, **2012**.
6. ROMANOWICZ R.J., NACHLIK E., JANUCHTA-SZOSTAK A., STARKEL L., KUNDZEWICZ Z.W., BYCZKOWSKI A., KOWALCZAK P., ŻELAZIŃSKI J., RADZUK L., KOWALIK P., SZAMAŁEK K. Zagrożenia związane z nadmiarem wody, eng. Threats related to water excess, *Nauka* **1/2014**, 123-148, **2014**.
7. KAYE J., GROFFMAN P., GRIMM N., BAKER L., POUYAT R. A distinct urban biogeochemistry? *Trends in Ecology and Evolution* **21**, 192, **2006**.
8. WOJCIECHOWSKA E., RACKIEWICZ A., NAWROT N., MATEJ-LUKOWICZ K., OBARSKA-PEMPKOWIAK H. Investigations of heavy metals distribution in bottom sediments from retention tanks in the urbanized watershed. *Rocznik Ochrona Środowiska, Annual Set The Environment Protection* **19**, 572, **2017** [In Polish].
9. WEINEROWSKA-BORDS K. Wpływ uproszczeń na obliczanie spływu deszczowego w zlewni zurbanizowanej, eng. Impact of simplifications on the calculation of rainfall in an urbanized catchment, Gdansk University of Technology Publishing House, Gdańsk, **2010**.
10. MATEJ-LUKOWICZ K., WOJCIECHOWSKA E. Contamination of water in Oliwski Stream after the flood in 2016. *E3S Web Conf.* **17**, 2017 Proc. of 9<sup>th</sup> Conference on Interdisciplinary Problems in Environmental Protection and Engineering EKO-DOK **2017**.
11. <https://www.trojmiasto.pl/wiadomosci/Bilans-ułewy-w-Trojmiście-n103662.html> (accessed on 15<sup>th</sup> July 2016) .
12. LAW A-Arbeitskreis „Zielvorgaben” in Zusammenarbeit mit LAW A-Arbeitskreis „Qualitative Hydrologie der Fließgewässer”, Beurteilung der Wasserbeschaffenheit von Fließgewässern in der Bundesrepublik Deutschland – Chemische Gewässergüte klassifikation, eng. LAW A - Chemical waters classification, Berlin, **1998**.
13. MACDONALD D.D., INGERSOLL C.G., BERGER T.A. Development and evaluation of consensus-based Sediment Quality Guidelines for freshwater ecosystems, *Archives of Environmental Contamination and Toxicology* **39**, 20, Springer Verlag, New York Inc, **2000**.
14. ZWONITZER J.C., PIERZYŃSKI G.M., HETTIARACHCHI G.M. Effects of phosphorus addition on lead, cadmium, and zinc bioavailabilities in a metal-contaminated soil. *Water, Air, and Soil Pollution*, **143**, 193, **2003**.
15. CZECZOT H., MAJEWSKA M. Kadm – zagrożenie i skutki zdrowotne, eng. Cadmium - threat and health effects, *Toksykologia*, **66** (4), **2010**.
16. KHAN M.A., KHAN S., KHAN A., ALAM M., Soil contamination with cadmium, consequences and remediation using organic amendments, *Science of the Total Environment* 301-302, **2017**.