

Contents lists available at [ScienceDirect](https://www.sciencedirect.com)

# International Journal of Engineering Science

journal homepage: [www.elsevier.com/locate/ijengsci](http://www.elsevier.com/locate/ijengsci)

## Surface finite viscoelasticity and surface anti-plane waves

Victor A. Eremeyev\*

University of Cagliari, Via Marengo, 2, 09123 Cagliari, Italy

Gdańsk University of Technology, ul. Gabriela Narutowicza 11/12, 80-233 Gdańsk, Poland

### ARTICLE INFO

#### Keywords:

Surface viscoelasticity  
Surface waves  
Surface elasticity  
Anti-plane shear  
Dispersion relations

### ABSTRACT

We introduce the surface viscoelasticity under finite deformations. The theory is straightforward generalization of the Gurtin–Murdoch model to materials with fading memory. Surface viscoelasticity may reflect some surface related creep/stress relaxation phenomena observed at small scales. Discussed model could also describe thin inelastic coatings or thin interfacial layers. The constitutive equations for surface stresses are proposed. As an example we discuss propagation shear (anti-plane) waves in media with surface stresses taking into account viscoelastic effects. Here we analysed surface waves in an elastic half-space with viscoelastic coatings. Dispersion relations were derived.

### 1. Introduction

Waves in solids and fluids constitute a rather important branch of mechanics and physics. Among them it is worth to mention surface/interfacial waves, i.e. waves localized in vicinity of free surfaces or interfaces, see e.g. [Achenbach \(1973\)](#), [Strutt \(1945\)](#), [Überall \(1973\)](#) and [Kaplunov and Prikazchikov \(2017\)](#). Considering real materials one can observe that dissipation phenomena may play a crucial role. For example, [Brekhovskikh \(1960\)](#) noted that the elastic waves theory cannot describe some experimentally observed phenomena. In fact, in the case of Rayleigh waves in viscoelastic media studied by [Currie et al. \(1977\)](#), [Currie and O'Leary \(1978\)](#) and [Currie \(1979\)](#) it was discovered that unlike the elastic case it could be more than one surface wave. For discussion of the number of Rayleigh waves in viscoelastic half-space we refer to [Carcione \(1992\)](#), [Chiriță et al. \(2014\)](#), [Romeo \(2001\)](#) and [Sharma \(2020\)](#). Similarly, viscoelastic Love waves were analysed by [Kielczyński \(2018\)](#), [Subhash and Gaur \(1978\)](#). For a current state of the theory of viscoelastic waves we refer to the fundamental book by [Borcherdt \(2009\)](#).

The aim of this paper is to introduce surface viscoelasticity and discuss antiplane surface waves propagation. Surface elasticity model was proposed by [Gurtin and Murdoch \(1975, 1978\)](#) and was generalized by [Steigmann and Ogden \(1997, 1999\)](#). From the physical point of view, these models describe deformations of an elastic solid body with perfectly attached to its surface an elastic membrane or shell, respectively. Nowadays, surface elasticity found various applications at small scales, see e.g. [Duan et al. \(2008\)](#), [Eremeyev \(2016\)](#), [Firooz et al. \(2021\)](#), [Jiang et al. \(2022\)](#), [Mogilevskaya et al. \(2021\)](#), [Wang et al. \(2011\)](#), [Zheng et al. \(2021\)](#) and [Kushch and Mogilevskaya \(2022\)](#). Moreover, it could be also extended to other scales, in particular, as a technique of surface/interface design, see e.g. [Aghaei et al. \(2021\)](#), [Halvey et al. \(2019\)](#). It was shown that within surface elasticity there exist anti-plane surface waves ([Eremeyev et al., 2016](#); [Xu et al., 2015](#)), see also [Eremeyev \(2020\)](#), [Eremeyev et al. \(2019, 2020\)](#), [Eremeyev and Sharma \(2019\)](#), [Jia et al. \(2018\)](#), [Mikhasev et al. \(2021, 2022, 2023\)](#), [Wu et al. \(2020\)](#), [Zhu et al. \(2019\)](#) and the reference therein.

Linear model of surface elasticity by Gurtin and Murdoch was extended to viscoelasticity by [Ru \(2009\)](#), where it was used for modelling of nanobeams. Similar one-dimensional model was used by [Hasheminejad and Gheshlaghi \(2010\)](#). Beams with thin

\* Correspondence to: University of Cagliari, Via Marengo, 2, 09123 Cagliari, Italy.

E-mail address: [victor.ermeyev@unica.it](mailto:victor.ermeyev@unica.it).

<https://doi.org/10.1016/j.ijengsci.2024.104029>

Received 30 December 2023; Received in revised form 19 January 2024; Accepted 22 January 2024

Available online 24 January 2024

0020-7225/© 2024 The Author(s).

Published by Elsevier Ltd.

This is an open access article under the CC BY license

(<http://creativecommons.org/licenses/by/4.0/>).

viscoelastic coatings were studied by Lyu et al. (2020). Two-dimensional surface viscoelasticity was introduced by Altenbach et al. (2012), Hasheminejad and Gheshlaghi (2013) in order to model thin plates and shells. In these papers linear constitutive equations for surface stresses were used.

In our paper we provide a generalization of the Gurtin–Murdoch model towards a finite surface viscoelasticity, i.e. considering finite deformations. In Section 2 we introduce surface stress tensors as a tensor-valued operator dependent of the history of surface deformations. As a result, we get a nonlinear-boundary-value problem taking into account viscoelastic surface stresses. Linearization of the latter problem is also provided. Finally, in order to demonstrate some properties of the model, in Section 3 we consider anti-plane surface waves in an elastic half-space considering viscoelastic surface stresses. Dispersion relations are given, i.e. dependencies of the wave-number and the attenuation coefficient on the frequency.

In the following we use direct tensor calculus as in Lurie (1990), Simmonds (1994) and Eremeyev et al. (2018), so vectors and tensors are shown in bold.

## 2. Surface viscoelasticity

Let us consider a deformed solid body  $B$  which occupies in a reference placement  $\kappa$  a volume  $V \subset \mathbb{R}^3$  with a smooth enough boundary  $S = \partial V$ . Deformations of  $B$  can be described as a smooth invertible mapping from  $\kappa$  into a current placement  $\chi(t)$  (Truesdell & Noll, 2004)

$$\mathbf{x} = \mathbf{x}(\mathbf{X}, t), \tag{1}$$

where  $\mathbf{X}$  and  $\mathbf{x}$  are the position vectors in  $\kappa$  and  $\chi$ , respectively, and  $t$  is time.

We introduce the deformation gradient  $\mathbf{A}$  and the surface deformation gradient  $\mathbf{F}$  as follows

$$\mathbf{A} = \nabla_{\kappa} \mathbf{x}, \quad \mathbf{F} = \nabla_S \mathbf{x}, \tag{2}$$

where  $\nabla_{\kappa}$  and  $\nabla_S$  are the Lagrangian 3D and 2D nabla-operators defined in  $V$  and on  $S$ . They are related to each other through the formula

$$\nabla_S = \mathbf{I}_2 \cdot \nabla_{\kappa},$$

where  $\mathbf{I}_2 = \mathbf{I} - \mathbf{N} \otimes \mathbf{N}$ ,  $\mathbf{I}$  is the unit tensor, “ $\cdot$ ” stands for the dot product, “ $\otimes$ ” denotes the dyadic product, and  $\mathbf{N}$  is the unit outward normal vector to  $S$ .

In the following we restrict ourselves to elastic behaviour in the bulk. So there exists a strain energy density  $W$  introduced as a function of  $\mathbf{A}$  (Ogden, 1997; Truesdell & Noll, 2004)

$$W = W(\mathbf{A}). \tag{3}$$

In the bulk we have the Piola–Kirchhoff stress tensor of the first kind  $\mathbf{P}$  and the Cauchy stress tensor  $\mathbf{T}$  given by the formulae (Eremeyev et al., 2018; Lurie, 1990)

$$\mathbf{P} = \frac{\partial W}{\partial \mathbf{A}}, \quad \mathbf{T} = J \mathbf{A}^{-T} \cdot \mathbf{P}, \tag{4}$$

where  $J = \det \mathbf{A}$  and superscript “ $T$ ” denotes the transposed tensor.

We also introduce the kinetic energy density by the standard formula

$$K = \frac{1}{2} \rho \mathbf{v} \cdot \mathbf{v}, \quad \mathbf{v} = \dot{\mathbf{x}}, \tag{5}$$

where  $\rho$  is a mass density in current placement  $\chi$  and the overdot stands for the derivative with respect to  $t$ .

As a result, in the bulk we have the following Eulerian equation of motion

$$\nabla_{\chi} \cdot \mathbf{T} + \rho \mathbf{f} = \rho \ddot{\mathbf{x}}, \tag{6}$$

where  $\mathbf{f}$  is mass force vector and  $\nabla_{\chi}$  is the 3D nabla-operator in  $\chi$  and  $\mathbf{n}$  is the unit normal to the boundary of  $B$  in the current placement.

Following Gurtin and Murdoch (1975, 1978) we introduce the surface Cauchy stress tensor  $\mathbf{S}$  and the surface mass density  $m$ . So we get the surface kinetic energy density

$$K_s = \frac{1}{2} m \mathbf{v} \cdot \mathbf{v}, \tag{7}$$

and on the boundary we have non-trivial boundary condition

$$\mathbf{n} \cdot \mathbf{T} = \nabla_s \cdot \mathbf{S} - m \ddot{\mathbf{x}}, \tag{8}$$

where  $\nabla_s = (\mathbf{I} - \mathbf{n} \otimes \mathbf{n}) \cdot \nabla_{\chi}$  is the surface nabla-operator in  $\chi$ , and  $\mathbf{n}$  is the normal to the surface of  $B$  in the current placement. Eq. (8) plays a crucial role in dynamics of solids with surface stresses.

In order to take into account surface viscoelasticity we consider  $\mathbf{S}$  dependent of history of deformations as follows

$$\mathbf{S} = \mathcal{A}(\mathbf{F}^t(s)), \quad \mathbf{F}^t(s) = \mathbf{F}(t - s), \quad s \geq 0, \tag{9}$$

where  $\mathcal{A}$  is an operator describing dependence on the history of deformations  $\mathbf{F}^i(s)$ . Let us recall that according to the principle of material frame indifference  $\mathbf{S}$  should be an indifferent (objective) tensor. This means it has some invariance properties under rigid body motions. So if we consider equivalent motion  $\mathbf{x}^*$  as

$$\mathbf{x}^* = \mathbf{a}(t) + \mathbf{x} \cdot \mathbf{O}(t)$$

where vector  $\mathbf{a}$  and  $\mathbf{O}$  are time-dependent vector and orthogonal tensor, respectively, then we get that  $\mathbf{S}^* = \mathbf{O}^T \cdot \mathbf{S} \cdot \mathbf{O}$ . Under this transformation we also have  $\mathbf{F}^* = \mathbf{F} \cdot \mathbf{O}$ . So  $\mathcal{A}$  has the following property

$$\mathcal{A}(\mathbf{F}^i(s) \cdot \mathbf{O}(t-s)) = \mathbf{O}^T(t) \cdot \mathcal{A}(\mathbf{F}^i(s)) \cdot \mathbf{O}(t) \quad \forall \mathbf{O} : \mathbf{O} \cdot \mathbf{O}^T = \mathbf{I} \tag{10}$$

For  $\mathbf{F}$  we have the polar decomposition in the form

$$\mathbf{F} = \mathbf{U} \cdot \mathbf{Q}, \tag{11}$$

where  $\mathbf{Q}$  is an orthogonal tensor and  $\mathbf{U}$  is a symmetric non-negative tensor. Note that as  $\mathbf{N} \cdot \mathbf{F} = \mathbf{0}$ ,  $\mathbf{F}$  is a singular tensor. So the standard polar decomposition requires some modifications, see e.g. Eremeyev et al. (2018) for more details. Taking  $\mathbf{O} = \mathbf{Q}^T$  we came to another form of the constitutive equation for  $\mathbf{S}$

$$\mathbf{S} = \mathbf{Q}^T(t) \cdot \mathcal{B}(\mathbf{U}^i(s)) \cdot \mathbf{Q}(t) \tag{12}$$

with new operator  $\mathcal{B}$ . Eq. (12) is a general form of surface stresses for simple materials. Nevertheless, some modifications of (12) are possible. Since  $\mathbf{U}^2 = \mathbf{C} \equiv \mathbf{F} \cdot \mathbf{F}^T$  we can use the surface Cauchy–Green strain tensor  $\mathbf{C}$  instead of its square root  $\mathbf{U}$ :

$$\mathbf{S} = \mathbf{Q}^T(t) \cdot \mathcal{B}(\mathbf{C}^i(s)) \cdot \mathbf{Q}(t)$$

with another operator  $\mathcal{C}$ . Moreover, instead of  $\mathbf{Q}$  we can use  $\mathbf{F}$ . Indeed,  $\mathbf{Q} = \mathbf{U}^{-1} \cdot \mathbf{F}$ , where by the inverse of  $\mathbf{U}$  we understood its inversion in the corresponding subspace, see Eremeyev et al. (2018). Finally we came to the form

$$\mathbf{S} = \mathbf{F}^T(t) \cdot \mathcal{S}(\mathbf{C}^i(s)) \cdot \mathbf{F}(t), \tag{13}$$

which is straightforward analogy of the 3D case, see Truesdell (1966, 1991) and Truesdell and Noll (2004).

For further specification of operator  $\mathcal{S}(\mathbf{C}^i(s))$  in (13) we can use the concept of fading memory and the relative tensors as in Truesdell (1966, 1991) and Truesdell and Noll (2004). First, we introduce the relative surface gradient tensor  $\mathbf{F}_i(\tau)$ . To this end we consider  $\chi(t)$  as the reference placement and  $\chi(\tau)$  as a current one. Here  $t$  and  $\tau$  are some time instants. So  $\mathbf{F}_i(\tau)$  is defined through the formula

$$\mathbf{F}_i(\tau) = \nabla_{\chi(t)} \mathbf{x}(\tau),$$

where we have specified the nabla-operator taken in  $\chi(t)$ . We have the formula related  $\mathbf{F}_i(\tau)$  to  $\mathbf{F}(\tau)$  and  $\mathbf{F}(t)$ :

$$\mathbf{F}(\tau) = \mathbf{F}(t) \cdot \mathbf{F}_i(\tau). \tag{14}$$

Obviously,  $\mathbf{F}_i(t) = \mathbf{I}$ . Using  $\mathbf{F}_i(\tau)$  we can introduce the relative surface Cauchy–Green strain tensor  $\mathbf{C}_i(\tau)$  by the formula

$$\mathbf{C}_i(\tau) = \mathbf{F}_i(\tau) \cdot \mathbf{F}_i^T(\tau).$$

Similar to (14) we have that

$$\mathbf{C}(\tau) = \mathbf{F}(t) \cdot \mathbf{C}_i(\tau) \cdot \mathbf{F}^T(t), \tag{15}$$

and  $\mathbf{C}_i(t) = \mathbf{I}$ . So  $\mathbf{C}_i(\tau)$  can be treated as a relative strain measure describing deformations between  $\chi(t)$  and  $\chi(\tau)$ . Introducing the history of the relative Cauchy–Green strain tensor  $\mathbf{C}_i^i(s) = \mathbf{C}_i(t-s)$  we came to another form of constitutive equation for  $\mathbf{S}$

$$\mathbf{S} = \mathbf{F}^T(t) \cdot \mathcal{S}_e(\mathbf{C}(t)) \cdot \mathbf{F}(t) + \mathbf{F}^T(t) \cdot \mathcal{S}_v(\mathbf{G}_i^i(s), \mathbf{C}(t)) \cdot \mathbf{F}(t), \tag{16}$$

where  $\mathbf{G}_i^i(s) = \mathbf{Q}(t) \cdot \mathbf{C}_i^i(s) \cdot \mathbf{Q}(t)^T - \mathbf{I}$ ,  $\mathcal{S}_e$  is a tensor-valued function of the current value of  $\mathbf{C}$ , and a history-dependent operator  $\mathcal{S}_v$  vanishes when  $\mathbf{G} = \mathbf{0}$ :

$$\mathcal{S}_v(\mathbf{0}, \mathbf{C}(t)) = \mathbf{0}.$$

Constitutive Eq. (16) is a sum of an “equilibrium term” and a “viscoelastic term” that vanishes when the material was always in the rest.

As an example of constitutive equations we can consider so-called linear finite surface viscoelasticity with  $\mathcal{S}_v$  given by

$$\mathcal{S}_v = \int_{-\infty}^0 \mathbf{K}(\mathbf{C}(t), s) : \mathbf{G}_i^i(s) ds, \tag{17}$$

where  $\mathbf{K}$  is a fourth-order tensor (kernel) dependent on  $\mathbf{C}$  and  $s$ , “:” stands for the double-dot product. Note that by the linear finite surface viscoelasticity here we mean linear dependence on history  $\mathbf{C}_i^i(s)$ . Other nonlinear integral constitutive relations can be introduced similarly to 3D finite viscoelasticity, see e.g. Christensen (1971, 1980), Truesdell and Noll (2004).

If we restrict ourselves to isotropic material behaviour we can represent (16) as follows

$$\mathbf{S} = \mathbf{f}(\mathbf{B}(t)) + \mathcal{F}(\mathbf{H}'_i(s), \mathbf{B}(t)), \quad \mathcal{F}(\mathbf{0}, \mathbf{B}(t)) = \mathbf{0}, \tag{18}$$

where  $\mathbf{B} = \mathbf{F}^T \cdot \mathbf{F}$  is the left surface Cauchy–Green tensor,  $\mathbf{H}'_i(s) = \mathbf{C}'_i(s) - \mathbf{I}$ , and  $\mathbf{f}$  and  $\mathcal{F}$  satisfy the isotropy conditions

$$\mathbf{O} \cdot \mathbf{f}(\mathbf{B}) \cdot \mathbf{O}^T = \mathbf{f}(\mathbf{O} \cdot \mathbf{B} \cdot \mathbf{O}^T), \quad \forall \mathbf{O} : \mathbf{O} \cdot \mathbf{O}^T = \mathbf{I},$$

$$\mathbf{O}(t) \cdot \mathcal{F}(\mathbf{H}'_i(s), \mathbf{B}(t)) \cdot \mathbf{O}^T(t) = \mathcal{F}(\mathbf{O}'_i(s) \cdot \mathbf{H}'_i(s) \cdot \mathbf{O}'_i(s)^T, \mathbf{O}(t) \cdot \mathbf{B}(t) \cdot \mathbf{O}^T(t)).$$

Another example of constitutive relations can be introduced using surface Rivlin–Ericksen tensors  $\mathbf{A}_j$ . Using the formal series expansion

$$\mathbf{C}'_i(s) = \sum_{i=0}^{\infty} \frac{(-1)^i s^i}{i} \mathbf{A}_i(t) \tag{19}$$

and taking only a finite number  $n$  of term in (19), we came to the constitutive relations of differential type of order  $n$

$$\mathbf{S} = \mathbf{f}(\mathbf{B}(t)) + \mathbf{L}(\mathbf{B}(t), \mathbf{A}_1(t), \dots, \mathbf{A}_n(t)), \quad \mathbf{L}(\mathbf{B}(t), \mathbf{0}, \dots, \mathbf{0}) = \mathbf{0}, \tag{20}$$

where  $\mathbf{L}$  is a tensor-valued function. Tensors  $\mathbf{A}_j$  can be introduced using the recurrent formulae as follows

$$\mathbf{A}_{i+1} = \dot{\mathbf{A}}_i + \nabla_{\chi} \mathbf{v} \cdot \mathbf{A}_i + \mathbf{A}_i \cdot (\nabla_{\chi} \mathbf{v})^T, \quad \mathbf{A}_1 = 2\mathbf{D} \equiv (\nabla_{\chi} \mathbf{v} \cdot \mathbf{I}'_2 + \mathbf{I}'_2 \cdot (\nabla_{\chi} \mathbf{v})^T). \tag{21}$$

Here  $\mathbf{I}'_2 = \mathbf{I} - \mathbf{n} \otimes \mathbf{n}$  and  $\mathbf{D}$  is the surface strain rate.

The simplest case is the viscoelastic material of order 1 with constitutive relation

$$\mathbf{S} = \mathbf{f}(\mathbf{B}) + \mathbf{L}(\mathbf{B}, \mathbf{D}), \quad \mathbf{L}(\mathbf{B}, \mathbf{0}) = \mathbf{0}. \tag{22}$$

As  $\mathbf{B}$  and  $\mathbf{D}$  are symmetric 2D tensors, from isotropy conditions it follows that  $\mathbf{f}$  and  $\mathbf{L}$  have the form

$$\mathbf{f}(\mathbf{B}) = f_0(I_1, I_2)\mathbf{I}'_2 + f_1(I_1, I_2)\mathbf{B}, \tag{23}$$

$$\mathbf{L}(\mathbf{B}, \mathbf{D}) = \ell_0\mathbf{I}'_2 + \ell_1\mathbf{B} + \ell_1\mathbf{D}, \tag{24}$$

where scalar coefficients  $f_0, f_1$ , and  $\ell_i = \ell_i(I_1, \dots, I_5)$  are functions of invariants  $I_k, k = 1, \dots, 5$ , are given by

$$I_1 = \text{tr } \mathbf{B}, \quad I_2 = \text{tr } \mathbf{B}^2, \quad I_2 = \text{tr } \mathbf{D}, \quad I_4 = \text{tr } \mathbf{D}^2, \quad I_5 = \text{tr } (\mathbf{D} \cdot \mathbf{B}),$$

see e.g. Zubov (1982) for representation of isotropic functions. Restricting ourselves to linear dependence on  $\mathbf{D}$  we came to the following representation of the surface stresses

$$\begin{aligned} \mathbf{S} = & f_0(I_1, I_2)\mathbf{I}'_2 + f_1(I_1, I_2)\mathbf{B} + g_1(I_1, I_2)(\text{tr } \mathbf{D})\mathbf{I}'_2 + g_2(I_1, I_2)(\text{tr } \mathbf{D})\mathbf{B} \\ & + g_3(I_1, I_2)\text{tr } (\mathbf{D} \cdot \mathbf{B})\mathbf{I}'_2 + g_4(I_1, I_2)\text{tr } (\mathbf{D} \cdot \mathbf{B})\mathbf{B} + g_6(I_1, I_2)\mathbf{D}. \end{aligned} \tag{25}$$

with new coefficients  $g_k$ . Since here we have 2D tensors, this representation of isotropic linearly viscous material is more simple than its 3D counterpart, see Eq. (41.8) in Truesdell and Noll (2004).

Considering infinitesimal deformations Eqs. (16) with (17) or (25) can be transformed to linear surface viscoelasticity with integral or differential form of governing equations. For example, Eq. (25) became

$$\mathbf{S} = \lambda_s \mathbf{I}_2 \text{tr } \mathbf{e} + 2\mu_s \mathbf{e} + \lambda_v \mathbf{I}_2 \text{tr } \dot{\mathbf{e}} + 2\mu_v \dot{\mathbf{e}}, \tag{26}$$

where  $\mathbf{e} = \frac{1}{2} (\nabla_{\kappa} \mathbf{u} \cdot \mathbf{I}_2 + \mathbf{I}_2 \cdot (\nabla_{\kappa} \mathbf{u})^T)$  is the surface strain tensor. Eq. (26) is a surface analogy of the Kelvin–Voigt model of 3D viscoelasticity, see e.g. Christensen (1971). Note that here we have four material parameters that are the surface Lamé moduli  $\lambda_s$  and  $\mu_s$ , and viscosity moduli  $\lambda_v$  and  $\mu_v$ .

### 3. Antiplane surface waves

As an example, let us consider anti-plane surface waves in an elastic half-space with viscoelastic surface stresses. Let it takes the volume  $X_2 \leq 0$ , where  $X_1, X_2$ , and  $X_3$  are the Cartesian coordinates with corresponding unit base vectors  $\mathbf{i}_k$ , so  $\mathbf{N} = \mathbf{n} = \mathbf{i}_2$ , see Fig. 1. In the following we restrict ourselves to infinitesimal deformations and isotropic material behaviour. So in the bulk we have Hooke’s law

$$\mathbf{T} = 2\mu\boldsymbol{\varepsilon} + \lambda \text{tr } \boldsymbol{\varepsilon} \mathbf{I}, \quad \boldsymbol{\varepsilon} = \frac{1}{2} (\nabla_{\kappa} \mathbf{u} + (\nabla_{\kappa} \mathbf{u})^T), \tag{27}$$

where  $\lambda$  and  $\mu$  are the Lamé moduli, and we use (26) as constitutive equation for the surface stresses.

Let us note that anti-plane shear gives the simplest example of motions (Achenbach, 1973). The displacement vector has the form

$$\mathbf{u} = u(X_1, X_2, t)\mathbf{i}_3. \tag{28}$$

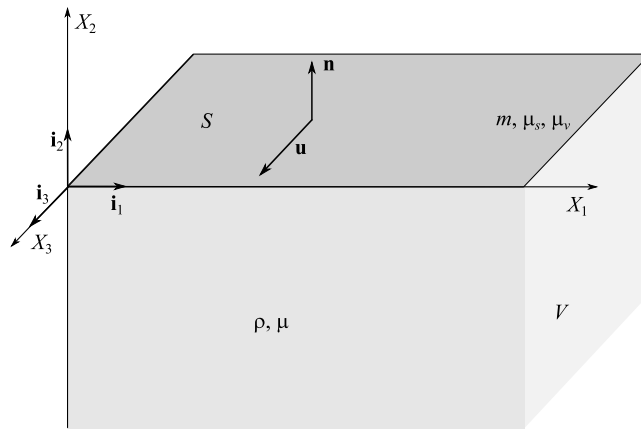


Fig. 1. Elastic half-space with viscoelastic coating.

From (28) it follows that

$$\nabla_{\kappa} \mathbf{u} = \nabla_{\kappa} u \otimes \mathbf{i}_3, \quad \nabla_s \mathbf{u} = u_{,1} \mathbf{i}_1 \otimes \mathbf{i}_3,$$

$$\boldsymbol{\varepsilon} = \frac{1}{2}(\nabla_{\kappa} u \otimes \mathbf{i}_3 + \mathbf{i}_3 \otimes \nabla_{\kappa} u), \quad \mathbf{e} = \frac{1}{2}(u_{,1} \mathbf{i}_1 \otimes \mathbf{i}_3 + u_{,1} \mathbf{i}_3 \otimes \mathbf{i}_1),$$

where  $u_{,\eta} = \frac{\partial u}{\partial X_{\eta}}$ , and  $\eta = 1, 2$ . In this case we have

$$\mathbf{T} = 2\mu\boldsymbol{\varepsilon}, \quad \mathbf{S} = 2\mu_s\mathbf{e} + 2\mu_v\dot{\mathbf{e}}, \tag{29}$$

As a result, equation of motion (6) takes the form of wave equation

$$\mu\Delta u = \rho\ddot{u}, \quad \Delta u = u_{,11} + u_{,22}, \tag{30}$$

whereas the boundary condition (8) transform into

$$\mu u_{,2} = \mu_s u_{,11} + \mu_v \dot{u}_{,11} - m\ddot{u} \quad \text{at } X_2 = 0. \tag{31}$$

Following Eremeyev et al. (2016) we are looking for a solution in the harmonic form

$$u = U(X_1, X_2)e^{-i\omega t}, \tag{32}$$

where  $\omega$  is the angular velocity and  $i = \sqrt{-1}$ . Eqs. (30) and (31) take the form

$$\mu\Delta U = -\rho\omega^2 U, \quad \mu U_{,2} = (\mu_s - i\omega\mu_v)U_{,11} + m\omega^2 U, \tag{33}$$

Assuming that  $U$  decays with the distance from the half-space surface  $X_2 = 0$ , we find the solution of (33) in form

$$U = U_0 e^{\sqrt{k^2 - \omega^2/c_T^2} X_2} e^{ikX_1}, \tag{34}$$

where  $U_0$  is a complex amplitude, and  $c_T = \sqrt{\mu/\rho}$  is the phase velocity of transverse waves (Achenbach, 1973). Note that for a solution relating to a surface wave we assume that the following condition is satisfied

$$\text{Re } \kappa > 0, \quad \kappa = \sqrt{k^2 - \omega^2/c_T^2}.$$

Hereinafter Re and Im denote real and imaginary parts of a complex number, respectively. As a result, the solution of (30) takes the form

$$u = U_0 e^{\sqrt{k^2 - \omega^2/c_T^2} X_2} e^{i(kX_1 - \omega t)}. \tag{35}$$

Note that unlike the elastic case discussed in Eremeyev et al. (2016), here  $k$  is a complex wavenumber, in general. So  $k = \alpha + i\beta$  where  $\alpha = \text{Re}k$ , and  $\beta = \text{Im}k$  relates to an attenuation of the wave in direction of propagation. Substituting (35) into (33)<sub>2</sub> we get the complex dispersion relation

$$\mu\sqrt{k^2 - \omega^2/c_T^2} = -(\mu_s - i\omega\mu_v)k^2 + m\omega^2, \tag{36}$$

that relates  $\alpha$  and  $\beta$  with  $\omega$ . Typical dependencies of  $\alpha$  and  $\beta$  on  $\omega$  are shown in Fig. 2. Here  $\bar{\alpha} = \alpha l_d$ ,  $\bar{\beta} = \beta l_d$ ,  $\bar{\omega} = \omega T_s$ , where  $l_d = m/\rho$  is the dynamic characteristic length and  $T_s = l_d/c_s$  is the characteristic time in the Gurtin–Murdoch model, respectively, and  $c_s = \sqrt{\mu_s/m}$  is the surface shear wave velocity. Here we used  $c_s = c_T/4$ .

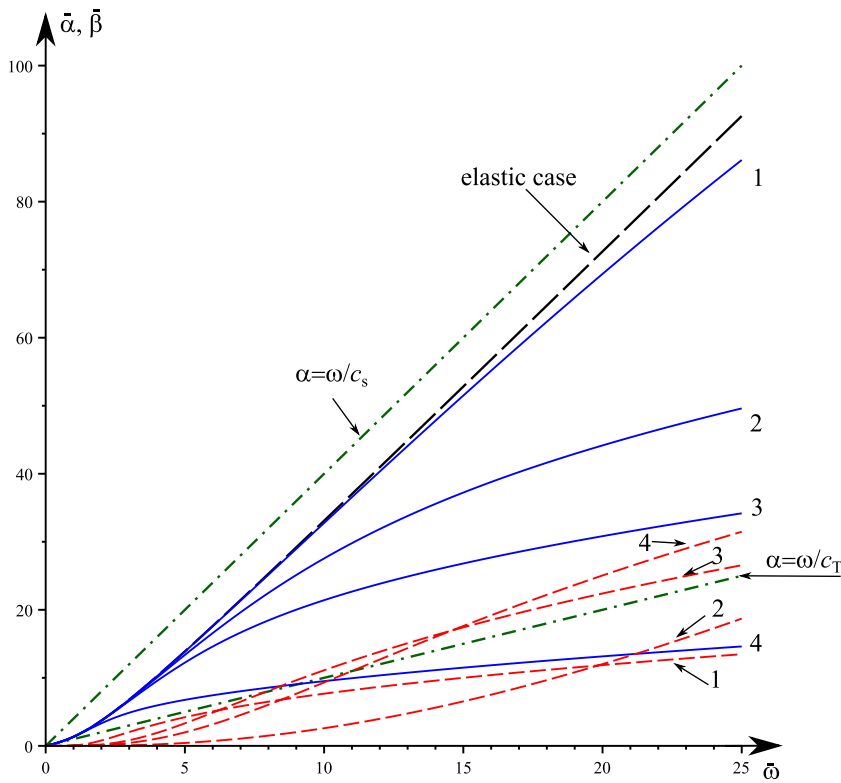


Fig. 2. Dispersion relations. Solid and dashed curves corresponds to  $\alpha-\omega$  and  $\beta-\omega$  dependencies, respectively. Labels 1, 2, 3, and 4 corresponds to the following values of ratio  $\mu_v/\mu_s T_s$ : 0.02, 0.1, 0.2, and 1, respectively. Longdashed curve corresponds to the elastic case.

In Fig. 2 the dashed curve corresponds to the elastic case (Eremeyev et al., 2016), i.e. when  $\mu_v = 0$ . Let us recall that for a pure elastic material the dispersion curve begins at point (0,0) where it has a tangent given by  $\alpha = \omega/c_T$ . Then it becomes almost parallel to the line  $\alpha = \omega/c_s$ . So it lies in the sector bounded by these two lines. Note that at  $\omega \rightarrow \infty$  we have almost non-dispersive waves.

In the case of viscoelastic materials dispersion curves begin again at (0,0) having the same tangent  $\alpha = \omega/c_T$ . Initially they are following the elastic case. Then they significantly deviate. For a small viscosity dispersion curve almost follows elastic one in a certain relatively large frequency range, see e.g. solid blue curve 1 in Fig. 2. For large viscosity the difference may be significant even for a relatively small  $\omega$ , see solid blue curve 4 in Fig. 2. Curves 1, 2, 3, and 4 correspond to  $\mu_v = q\mu_s T_s$ , where  $q = 0.02, 0.1, 0.2, \text{ and } 1$ , respectively. Obviously, the attenuation depends on viscosity, see dashed red curves in Fig. 2.

Let us also underline that viscosity changes decay of the solutions with the depth. Indeed, for an elastic material we exponentially decaying solutions, whereas for a viscoelastic material one can see some oscillations with the depth. In Fig. 3 we provide graphs of displacement as a function of  $X_2$ . Here

$$\bar{u} = \text{Re } U(0, X_2)/U_0 \equiv e^{\text{Re } \kappa X_2} \cos(\text{Im } \kappa X_2).$$

Depending on  $\omega$  and  $\mu_v$  one can see difference in the decay. Curves 1–4 correspond to the same values of  $\mu_v$  as in Fig. 2. Fig. 3 (a) and (b) relate to  $\bar{\omega} = 5$  and  $\bar{\omega} = 50$ , respectively. Dashed curves corresponds to elastic behaviour. For low viscosity and low frequency the amplitude is almost coincide with the elastic case, see e.g. curve 1 in Fig. 3 (a). For higher frequencies the difference is distinguishable, see again curve 1 in Fig. 3 (b). Unlike the elastic material there values of the depths where the displacement vanishes.

#### 4. Conclusions

We introduced surface finite viscoelasticity with surface stresses dependent on a deformation history. Some particular cases of constitutive relations are presented. The latter include the linear finite surface viscoelasticity and viscoelastic materials of the differential type. In the case of infinitesimal deformations these relations transform into linear surface viscoelasticity. As an example we discussed propagation of anti-plane surface waves in an elastic half-space with a thin coating modelled within the surface Kelvin–Voigt viscoelastic model. We demonstrated that even small dissipation essentially changes the behaviour of dispersion curves and the decay with the depth. This is more pronounced for relatively large values of  $\omega$ . In a similar way other types of surface or interfacial waves can be studied.

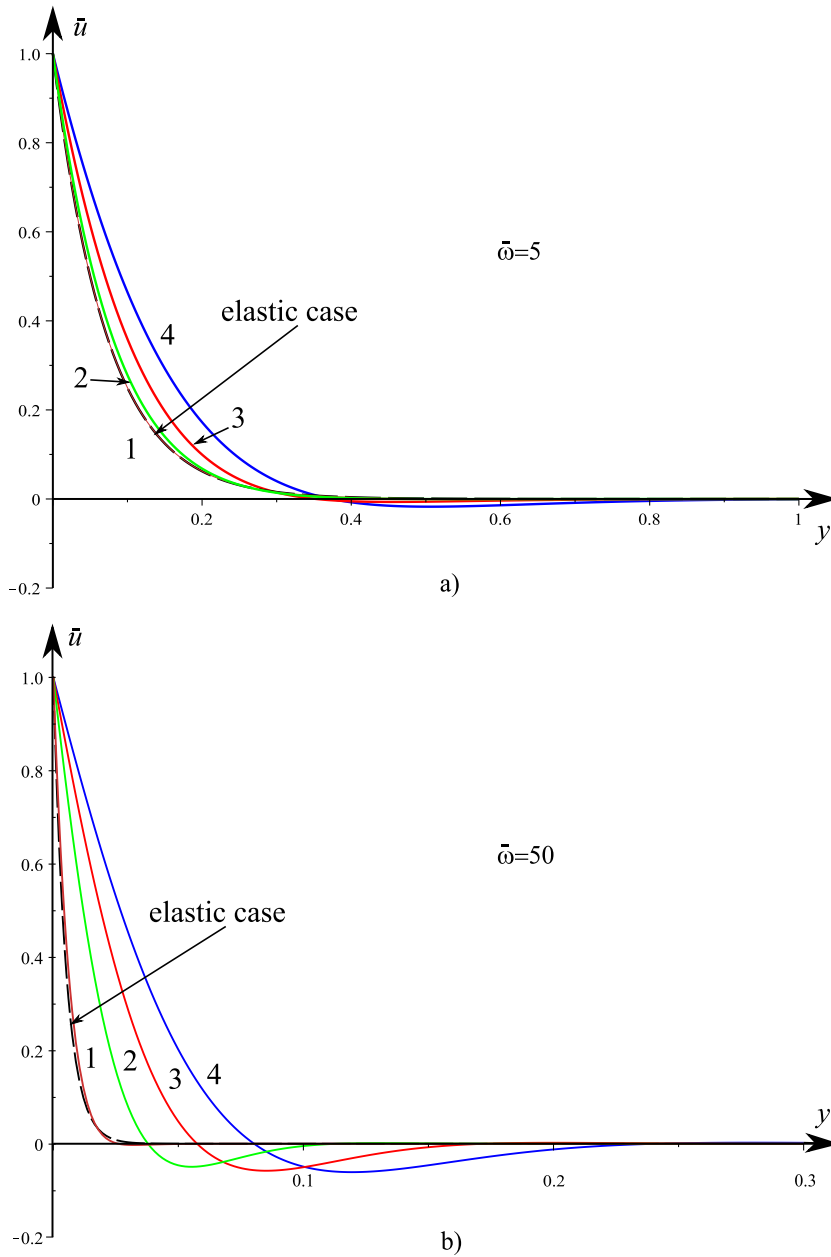


Fig. 3. Displacement  $\tilde{u}$  vs depth  $y = |X_2/l_d|$ . Other parameters are same as in Fig. 2.

Let us note that surface viscoelasticity model can be also useful for determination of elastic properties of inhomogeneous material at small scales as was done in the case of surface elasticity, see e.g. Dai and Schiavone (2023), Duan et al. (2008), Eremeyev (2016), Firooz et al. (2021), Jiang et al. (2022), Kushch and Mogilevskaya (2022), Mogilevskaya et al. (2021), Shugailo et al. (2023), Wang et al. (2011), Yang et al. (2023), Zheng et al. (2021) and the references therein. In particular, within the finite surface viscoelasticity initial/residual surface stresses can be easily introduced, that can be useful for description of surface stress relaxation phenomena.

In addition we also underline that the presented approach above can be extended towards other models of surface elasticity. In particular, the model by Steigmann and Ogden (1997, 1999) can be extended to material with memory. Following Truesdell and Noll (2004) the Steigmann–Ogden model can be treated as constitutive equation of a 2D material of grade 2. It could be extended towards materials with memory as in Truesdell and Noll (2004). Moreover, for materials of differential type the derived for viscoelastic Kirchhoff–Love shells surface Rivlin–Ericksen tensors can be used, see Zubov (1982).



## CRediT authorship contribution statement

**Victor A. Eremeyev:** Writing – review & editing, Writing – original draft, Validation, Software, Methodology, Investigation, Funding acquisition, Formal analysis, Conceptualization.

## Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

## Data availability

No data was used for the research described in the article.

## Acknowledgements

The author acknowledges the support within the project “Metamaterials design and synthesis with applications to infrastructure engineering” funded by the MUR Progetti di Ricerca di Rilevante Interesse Nazionale (PRIN) Bando 2022 - grant 20228CPHN5, Italy, and the support of the European Union’s Horizon 2020 research and innovation programme under the RISE MSCA EffectFact Project agreement No 101008140.

## References

- Achenbach, J. (1973). *Wave propagation in elastic solids*. Amsterdam: North Holland.
- Aghaei, A., Bochud, N., Rosi, G., & Naili, S. (2021). Wave propagation across a functionally graded interphase between soft and hard solids: Insight from a dynamic surface elasticity model. *Journal of the Mechanics and Physics of Solids*, 151, Article 104380.
- Altenbach, H., Eremeyev, V. A., & Morozov, N. F. (2012). Surface viscoelasticity and effective properties of thin-walled structures at the nanoscale. *International Journal of Engineering Science*, 59, 83–89.
- Borcherdt, R. D. (2009). *Viscoelastic waves in layered media*. Cambridge University Press.
- Brekhovskikh, L. M. (1960). *Waves in layered media*. New York: Academic Press.
- Carcione, J. M. (1992). Rayleigh waves in isotropic viscoelastic media. *Geophysical Journal International*, 108(2), 453–464.
- Chiriță, S., Ciarletta, M., & Tibullo, V. (2014). Rayleigh surface waves on a Kelvin-Voigt viscoelastic half-space. *Journal of Elasticity*, 115, 61–76.
- Christensen, R. M. (1971). *Theory of viscoelasticity. An introduction*. New York: Academic Press.
- Christensen, R. M. (1980). A nonlinear theory of viscoelasticity for application to elastomers. *Journal of Applied Mechanics*, 47(4), 762–768.
- Currie, P. K. (1979). Viscoelastic surface waves on a standard linear solid. *Quarterly of Applied Mathematics*, 37(3), 332–336.
- Currie, P. K., Hayes, M. A., & O’Leary, P. M. (1977). Viscoelastic Rayleigh waves. *Quarterly of Applied Mathematics*, 35(1), 35–53.
- Currie, P. K., & O’Leary, P. M. (1978). Viscoelastic Rayleigh waves II. *Quarterly of Applied Mathematics*, 445–454.
- Dai, M., & Schiavone, P. (2023). Discussion of the linearized version of the Steigmann-Ogden surface model in plane deformation and its application to inclusion problems. *International Journal of Engineering Science*, 192, Article 103931.
- Duan, H. L., Wang, J., & Karihaloo, B. L. (2008). Theory of elasticity at the nanoscale. In *Advances in applied mechanics. Vol. 42* (pp. 1–68). Elsevier.
- Eremeyev, V. A. (2016). On effective properties of materials at the nano- and microscales considering surface effects. *Acta Mechanica*, 227(1), 29–42.
- Eremeyev, V. A. (2020). Strongly anisotropic surface elasticity and antiplane surface waves. *Philosophical Transactions of the Royal Society, Series A*, 378(2162), Article 20190100.
- Eremeyev, V. A., Cloud, M. J., & Lebedev, L. P. (2018). *Applications of tensor analysis in continuum mechanics*. New Jersey: World Scientific.
- Eremeyev, V. A., Rosi, G., & Naili, S. (2016). Surface/interfacial anti-plane waves in solids with surface energy. *Mechanics Research Communications*, 74, 8–13.
- Eremeyev, V. A., Rosi, G., & Naili, S. (2019). Comparison of anti-plane surface waves in strain-gradient materials and materials with surface stresses. *Mathematics and Mechanics of Solids*, 24(8), 2526–2535.
- Eremeyev, V. A., Rosi, G., & Naili, S. (2020). Transverse surface waves on a cylindrical surface with coating. *International Journal of Engineering Science*, 147, Article 103188.
- Eremeyev, V. A., & Sharma, B. L. (2019). Anti-plane surface waves in media with surface structure: Discrete vs. continuum model. *International Journal of Engineering Science*, 143, 33–38.
- Firooz, S., Steinmann, P., & Javili, A. (2021). Homogenization of composites with extended general interfaces: comprehensive review and unified modeling. *Applied Mechanics Reviews*, 73(4), Article 040802.
- Gurtin, M. E., & Murdoch, A. I. (1975). A continuum theory of elastic material surfaces. *Archive of Rational Mechanics and Analysis*, 57(4), 291–323.
- Gurtin, M. E., & Murdoch, A. I. (1978). Surface stress in solids. *International Journal of Solids and Structures*, 14(6), 431–440.
- Halvey, A. K., Macdonald, B., Dhyani, A., & Tuteja, A. (2019). Design of surfaces for controlling hard and soft fouling. *Philosophical Transactions of the Royal Society, Series A*, 377(2138), Article 20180266.
- Hasheminejad, S. M., & Gheshlaghi, B. (2010). Dissipative surface stress effects on free vibrations of nanowires. *Applied Physics Letters*, 97(25).
- Hasheminejad, S. M., & Gheshlaghi, B. (2013). Eigenfrequencies and quality factors of nanofilm resonators with dissipative surface stress effects. *Wave Motion*, 50(1), 94–100.
- Jia, F., Zhang, Z., Zhang, H., Feng, X.-Q., & Gu, B. (2018). Shear horizontal wave dispersion in nanolayers with surface effects and determination of surface elastic constants. *Thin Solid Films*, 645, 134–138.
- Jiang, Y., Li, L., & Hu, Y. (2022). A compatible multiscale model for nanocomposites incorporating interface effect. *International Journal of Engineering Science*, 174, Article 103657.
- Kaplunov, J., & Prikazchikov, D. A. (2017). Asymptotic theory for Rayleigh and Rayleigh-type waves. *Advances in Applied Mechanics*, 50, 1–106.
- Kielczyński, P. (2018). Direct Sturm–Liouville problem for surface Love waves propagating in layered viscoelastic waveguides. *Applied Mathematical Modelling*, 53, 419–432.
- Kushch, V. I., & Mogilevskaya, S. G. (2022). On modeling of elastic interface layers in particle composites. *International Journal of Engineering Science*, 171, Article 103697.
- Lurie, A. I. (1990). *Non-linear theory of elasticity*. Amsterdam: North-Holland.



- Lyu, Q., Zhang, N.-H., Zhang, C.-Y., Wu, J.-Z., & Zhang, Y.-C. (2020). Effect of adsorbate viscoelasticity on dynamical responses of laminated microcantilever resonators. *Composite Structures*, 250, Article 112553.
- Mikhasev, G. I., Botogova, M. G., & Eremeyev, V. A. (2021). On the influence of a surface roughness on propagation of anti-plane short-length localized waves in a medium with surface coating. *International Journal of Engineering Science*, 158, Article 103428.
- Mikhasev, G. I., Botogova, M. G., & Eremeyev, V. A. (2022). Anti-plane waves in an elastic thin strip with surface energy. *Philosophical Transactions of the Royal Society, Series A*, 380, 20210373–15.
- Mikhasev, G., Erbaş, B., & Eremeyev, V. A. (2023). Anti-plane shear waves in an elastic strip rigidly attached to an elastic half-space. *International Journal of Engineering Science*, 184, 103809.
- Mogilevskaya, S. G., Zemlyanova, A. Y., & Kushch, V. I. (2021). Fiber-and particle-reinforced composite materials with the Gurtin–Murdoch and Steigmann–Ogden surface energy endowed interfaces. *Applied Mechanics Reviews*, 73(5), 1–18.
- Ogden, R. W. (1997). *Non-linear elastic deformations*. Mineola: Dover.
- Romeo, M. (2001). Rayleigh waves on a viscoelastic solid half-space. *The Journal of the Acoustical Society of America*, 110(1), 59–67.
- Ru, C. Q. (2009). Size effect of dissipative surface stress on quality factor of microbeams. *Applied Physics Letters*, 94(5), 051905, 1–3.
- Sharma, M. (2020). Rayleigh waves in isotropic viscoelastic solid half-space. *Journal of Elasticity*, 139(1), 163–175.
- Shugailo, T., Nobili, A., & Mishuris, G. (2023). A mechanical model for thin sheet straight cutting in the presence of an elastic support. *International Journal of Engineering Science*, 193, Article 103964.
- Simmonds, J. G. (1994). *A brief on tensor analysis* (2nd ed.). New York: Springer.
- Steigmann, D. J., & Ogden, R. W. (1997). Plane deformations of elastic solids with intrinsic boundary elasticity. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 453(1959), 853–877.
- Steigmann, D. J., & Ogden, R. W. (1999). Elastic surface-substrate interactions. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 455(1982), 437–474.
- Strutt, J. W. (1945). *The theory of sound. In two volumes*. New York: Dover.
- Subhash, G. G., & Gaur, V. K. (1978). Love wave dispersion in anisotropic visco-elastic medium. *Annals of Geophysics*, 31(1), 97–109.
- Truesdell, C. A. (1966). *The elements of continuum mechanics*. Berlin: Springer.
- Truesdell, C. A. (1991). *A first course in rational continuum mechanics*. Boston: Academic Press.
- Truesdell, C., & Noll, W. (2004). *The non-linear field theories of mechanics* (3rd ed.). Berlin: Springer.
- Überall, H. (1973). Surface waves in acoustics. In W. P. Mason, & R. N. Thurston (Eds.), *Physical acoustics. Vol. X*. New York: Academic Press.
- Wang, J., Huang, Z., Duan, H., Yu, S., Feng, X., Wang, G., Zhang, W., & Wang, T. (2011). Surface stress effect in mechanics of nanostructured materials. *Acta Mechanica Solida Sinica*, 24, 52–82.
- Wu, W., Zhang, H., Jia, F., Yang, X., Liu, H., Yuan, W., Feng, X.-Q., & Gu, B. (2020). Surface effects on frequency dispersion characteristics of Lamb waves in a nanoplate. *Thin Solid Films*, 697, Article 137831.
- Xu, L., Wang, X., & Fan, H. (2015). Anti-plane waves near an interface between two piezoelectric half-spaces. *Mechanics Research Communications*, 67, 8–12.
- Yang, W., Wang, S., Kang, W., Yu, T., & Li, Y. (2023). A unified high-order model for size-dependent vibration of nanobeam based on nonlocal strain/stress gradient elasticity with surface effect. *International Journal of Engineering Science*, 182, Article 103785.
- Zheng, C., Zhang, G., & Mi, C. (2021). On the strength of nanoporous materials with the account of surface effects. *International Journal of Engineering Science*, 160, Article 103451.
- Zhu, F., Pan, E., Qian, Z., & Wang, Y. (2019). Dispersion curves, mode shapes, stresses and energies of SH and Lamb waves in layered elastic nanoplates with surface/interface effect. *International Journal of Engineering Science*, 142, 170–184.
- Zubov, L. M. (1982). *Methods of nonlinear elasticity in the theory of shells (in Russian)*. Rostov on Don: Rostov State University.